

interatletika™

PRODUCTION AND SALE OF SPORTS GOODS

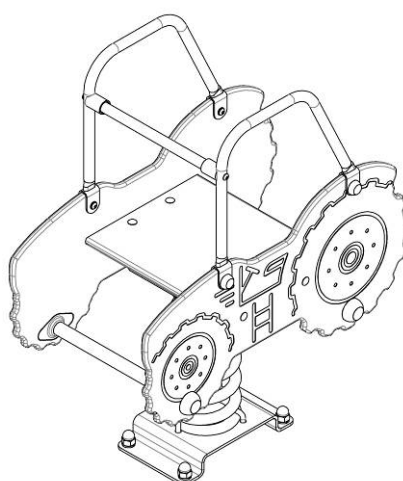
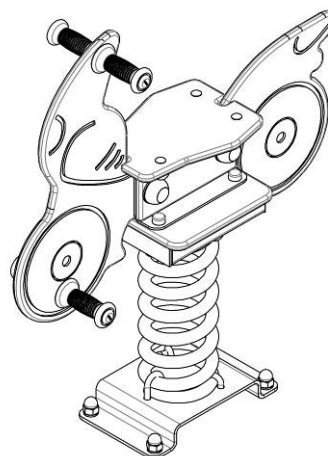
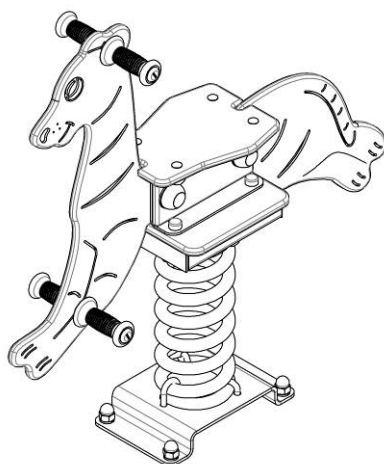
Customer support:

+38 095 273 81 53

play.interatletika.com

DATA SHEET

Swings TE, LK



CONTENT

1. GENERAL INFORMATION.....	3
2. MAIN TECHNICAL DATA AND CHARACTERISTICS.....	3
3. COMPONENTS AND CHARACTERISTICS OF THE MAIN PARTS OF THE PRODUCT....	14
4. PRODUCT ASSEMBLY AND INSTALLATION PROCEDURE.....	14
5. INSTALLATION SCHEME OF THE PRODUCT.....	18
6. USE OF THE PRODUCT.....	21
7. PRODUCT MAINTENANCE.....	21
8. INFORMATION ON STORAGE, TRANSPORT AND DISPOSAL.....	21
9. CURRENT REPAIR.....	22
10. MANUFACTURE'S (SUPPLIER'S) WARRANTIES.....	22

FOR NOTES

[illegible]

1. GENERAL INFORMATION

Purpose and content of this document. This document contains a general description of the equipment, information on installation, intended use, maintenance, current repair and manufacturer's warranty.

Distribution of this document for product modifications. The manufacturer can make changes to the design of the product, aimed at improving its characteristics, changing the design, etc. This document may not contain a description of such changes, but applies to such modified products.

2. MAIN TECHNICAL DATA AND CHARACTERISTICS

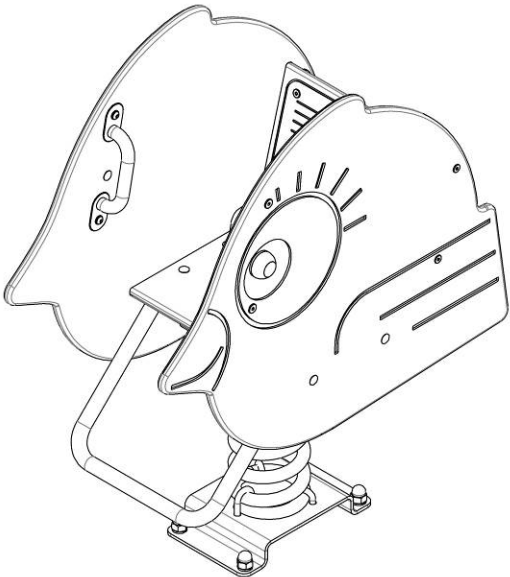
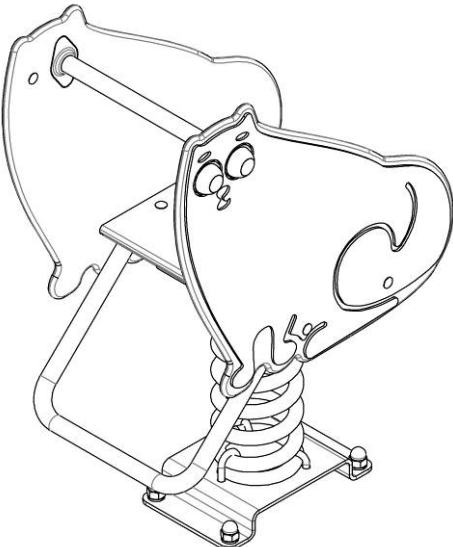
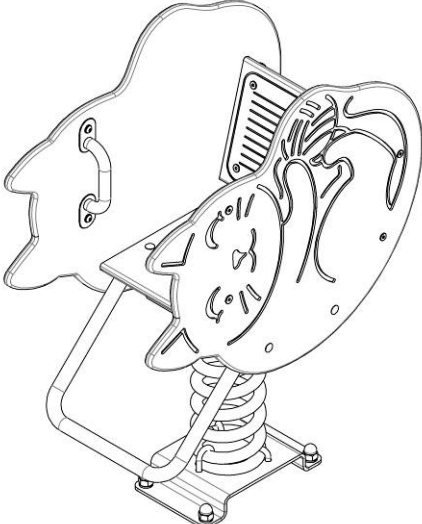
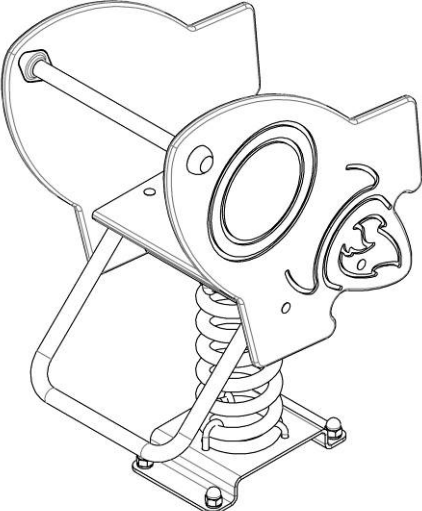
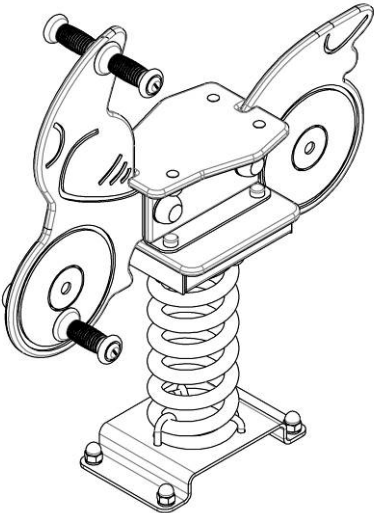
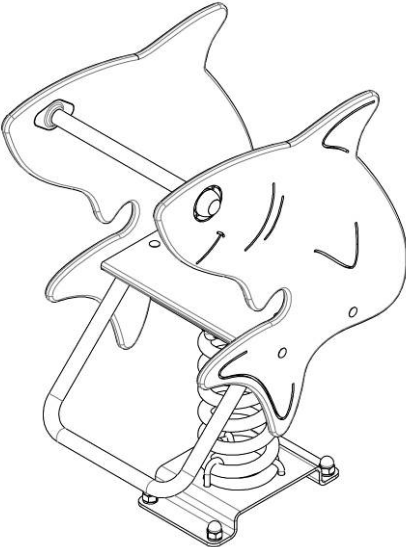
Table 1 – Technical data

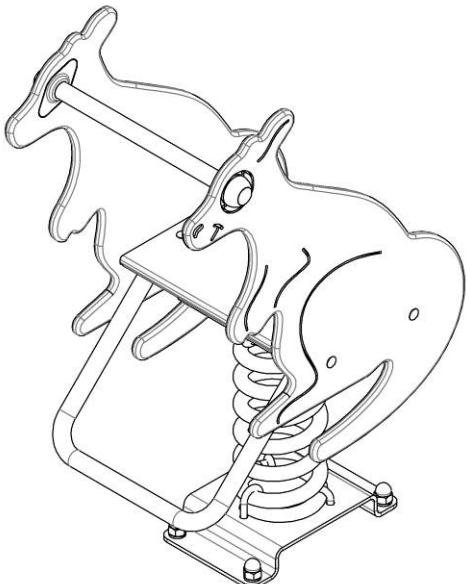
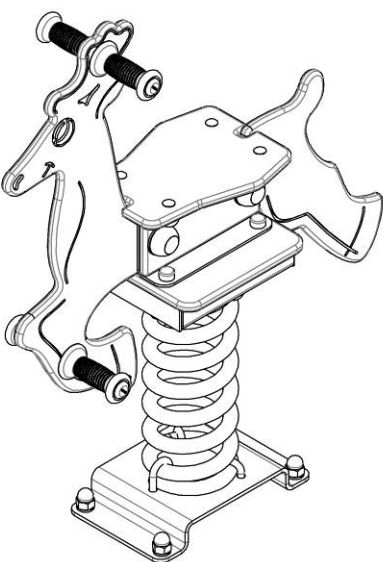
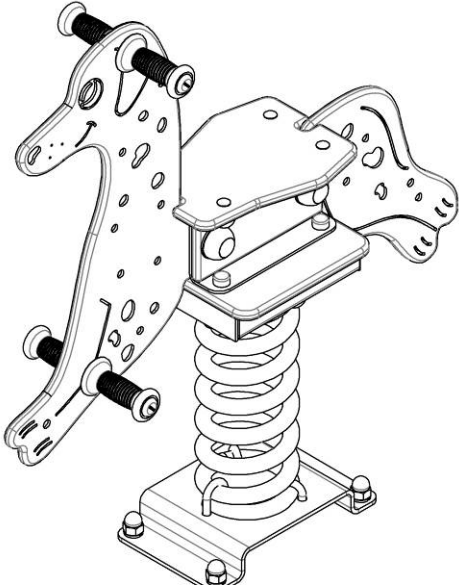
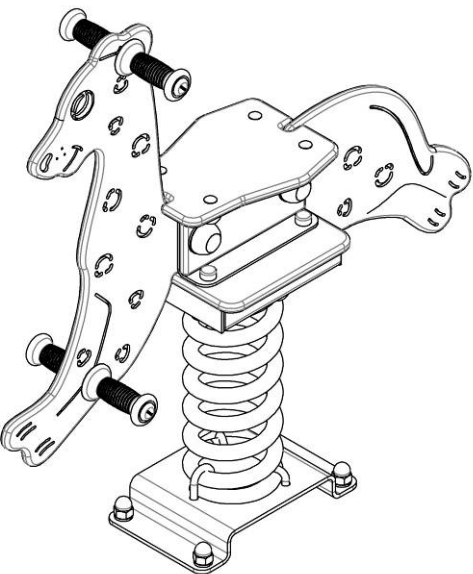
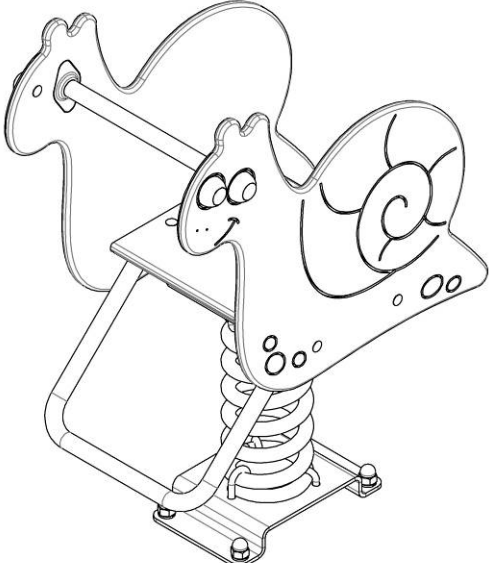
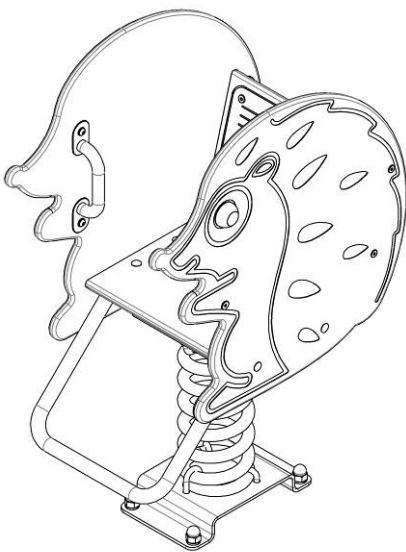
Product code	Name	Dimensions, mm			Free height of fall, mm	Weight, kg
		Length	Width	Height		
TE243.1	Spring Swing "Bird"	821	380	911	415	44.2
TE249	Spring toy «Cat»	582	380	842	415	37.0
TE249.1	Spring toy «Cat»	707	380	890	415	41.8
TE250.1	Spring swing "Rocket"	574	380	835	415	37.3
TE254	Spring Swing "Motorcycle"	777	240	821	535	34.5
TE255	Spring swing "Shark"	600	380	834	415	37.4
TE256	Spring swing "Kangaroo"	574	380	866	415	36.2
TE257	Spring swing "Deer"	762	240	866	535	34.1
TE258	Spring swing "Dog"	837	240	866	535	34.4
TE259	Spring swing "Leopard"	905	240	861	535	34.6
TE266	Spring swing "Snail"	646	380	875	415	37.4
TE267	Spring swing "Hedgehog"	645	380	916	415	41.9
TE280	Spring swing "Octopus"	696	380	859	415	42.3
TE281	Spring swing "Cachalot"	695	380	825	415	40.7
TE282	Spring swing "Plane"	731	380	831	415	39.0
TE283	Spring swing "UFO"	896	380	854	415	43.6
TE284	Spring swing "Tiger"	905	240	861	535	34.9
TE285	Spring Swing "Phoenix"	736	380	801	415	39.8
TE286	Spring swing "Dragon"	673	380	828	415	37.5
TE287	Spring swing "Chicken"	578	380	912	415	37.7
TE288	Spring Swing "Fish"	729	380	859	415	39.4
TE289	Spring swing "Bee"	717	380	903	415	42.7
TE290	Spring swing "Car"	761	380	792	415	41.7
LK401	Spring swing "Car"	776	386	743	415	39.1
LK402	Spring swing "Jeep"	729	386	799	415	39.3
LK403	Spring swing "Tractor"	742	386	833	415	39.2
LK404	Spring swing "Plane"	732	690	729	415	38.9

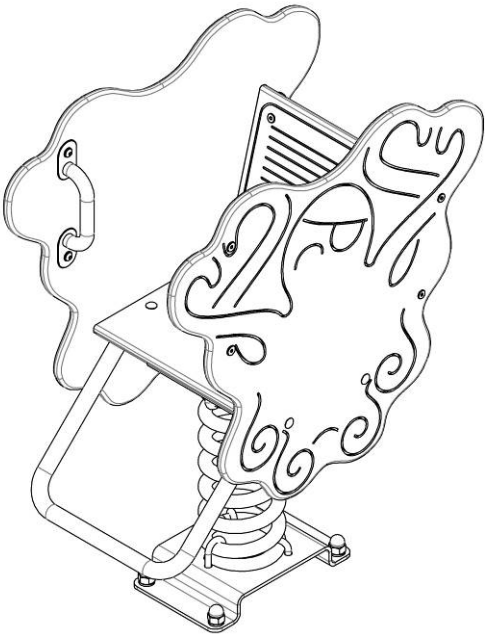
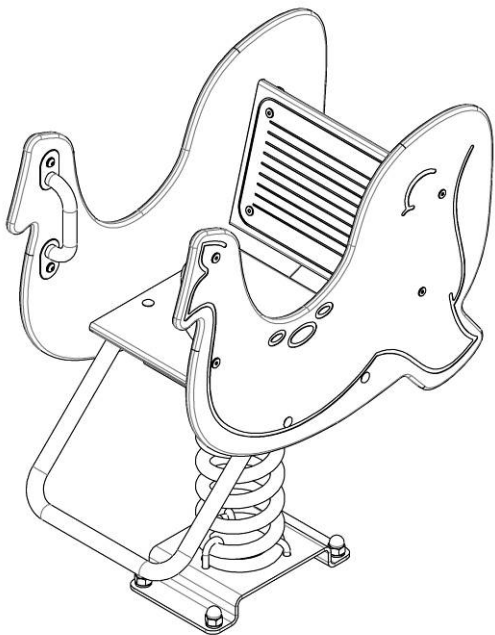
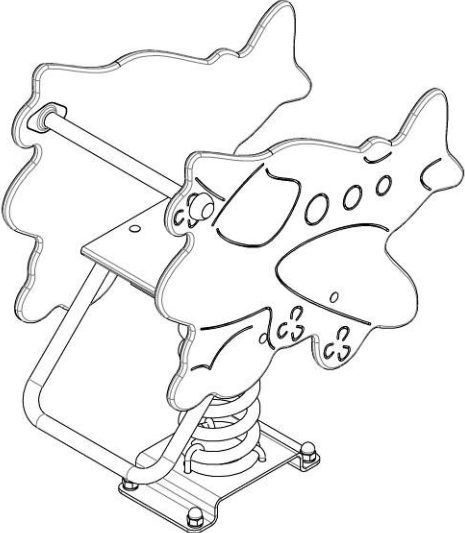
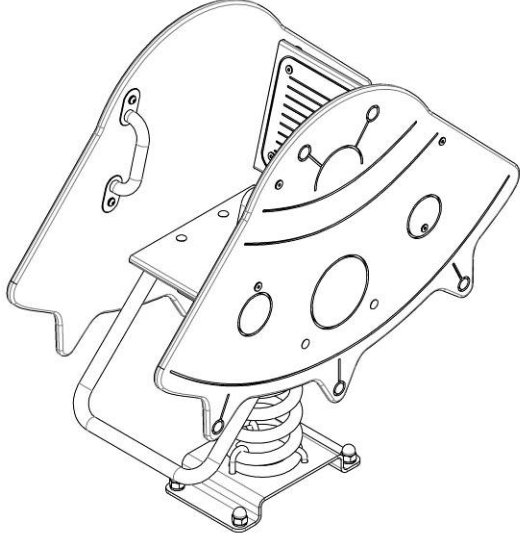
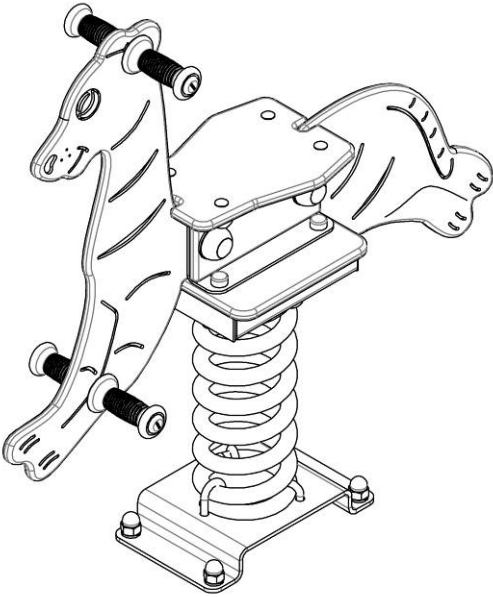
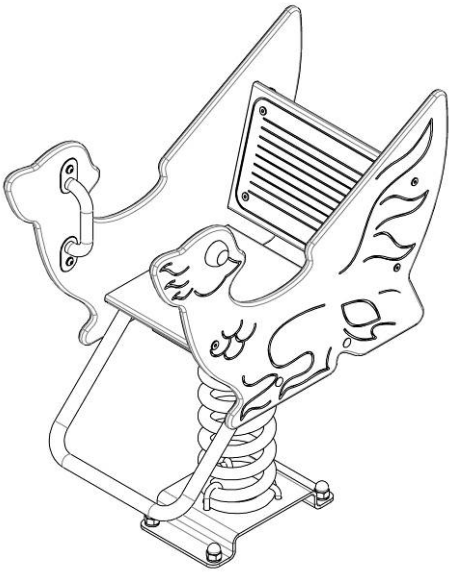
Age range - from 3 to 6 years

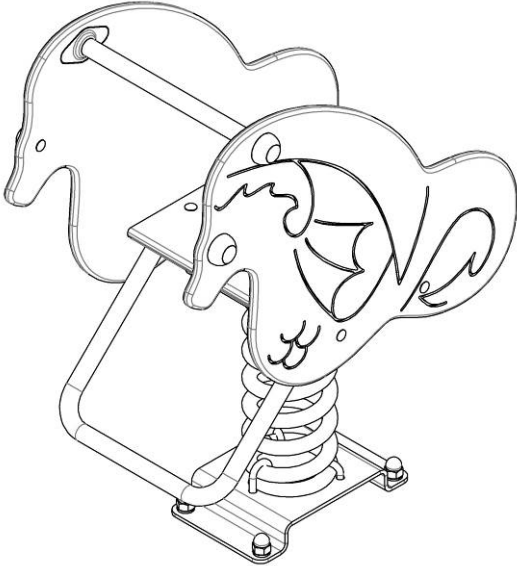
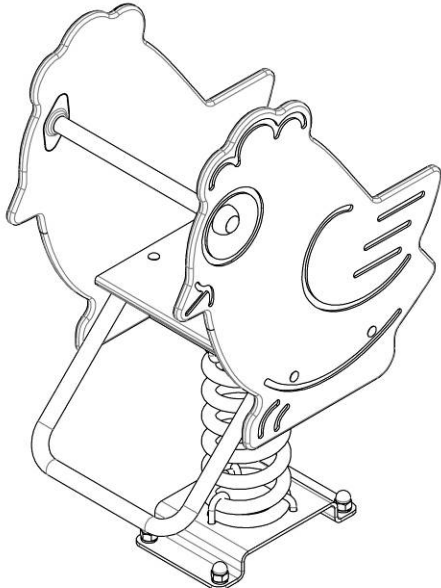
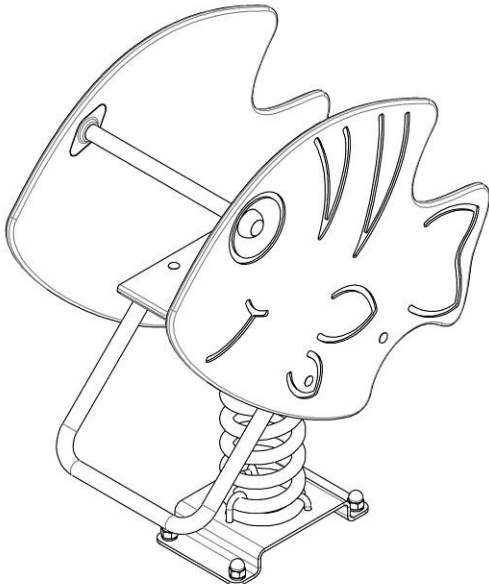
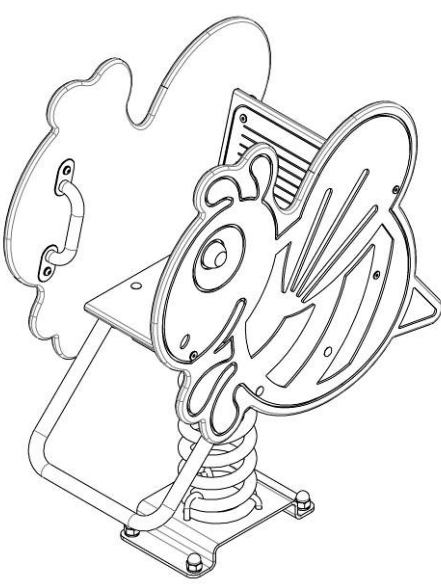
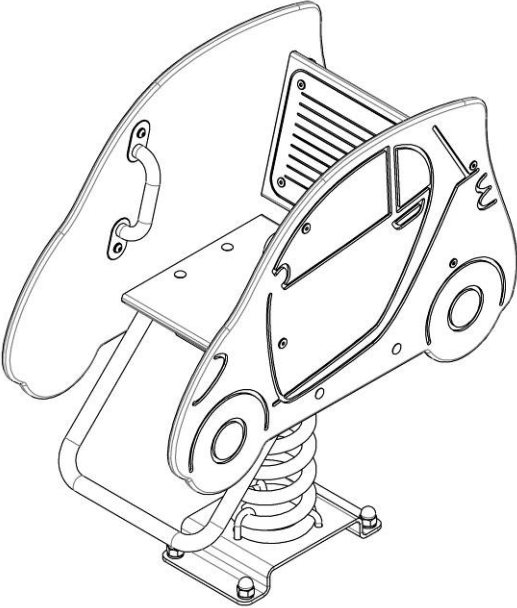
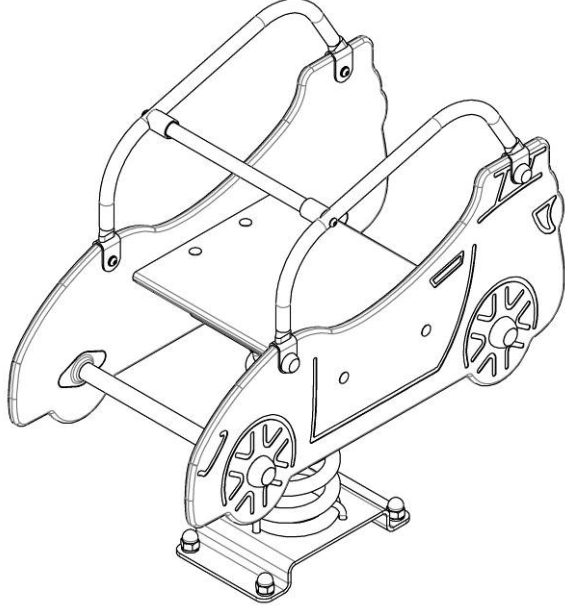
Weight limits - up to 60 kg

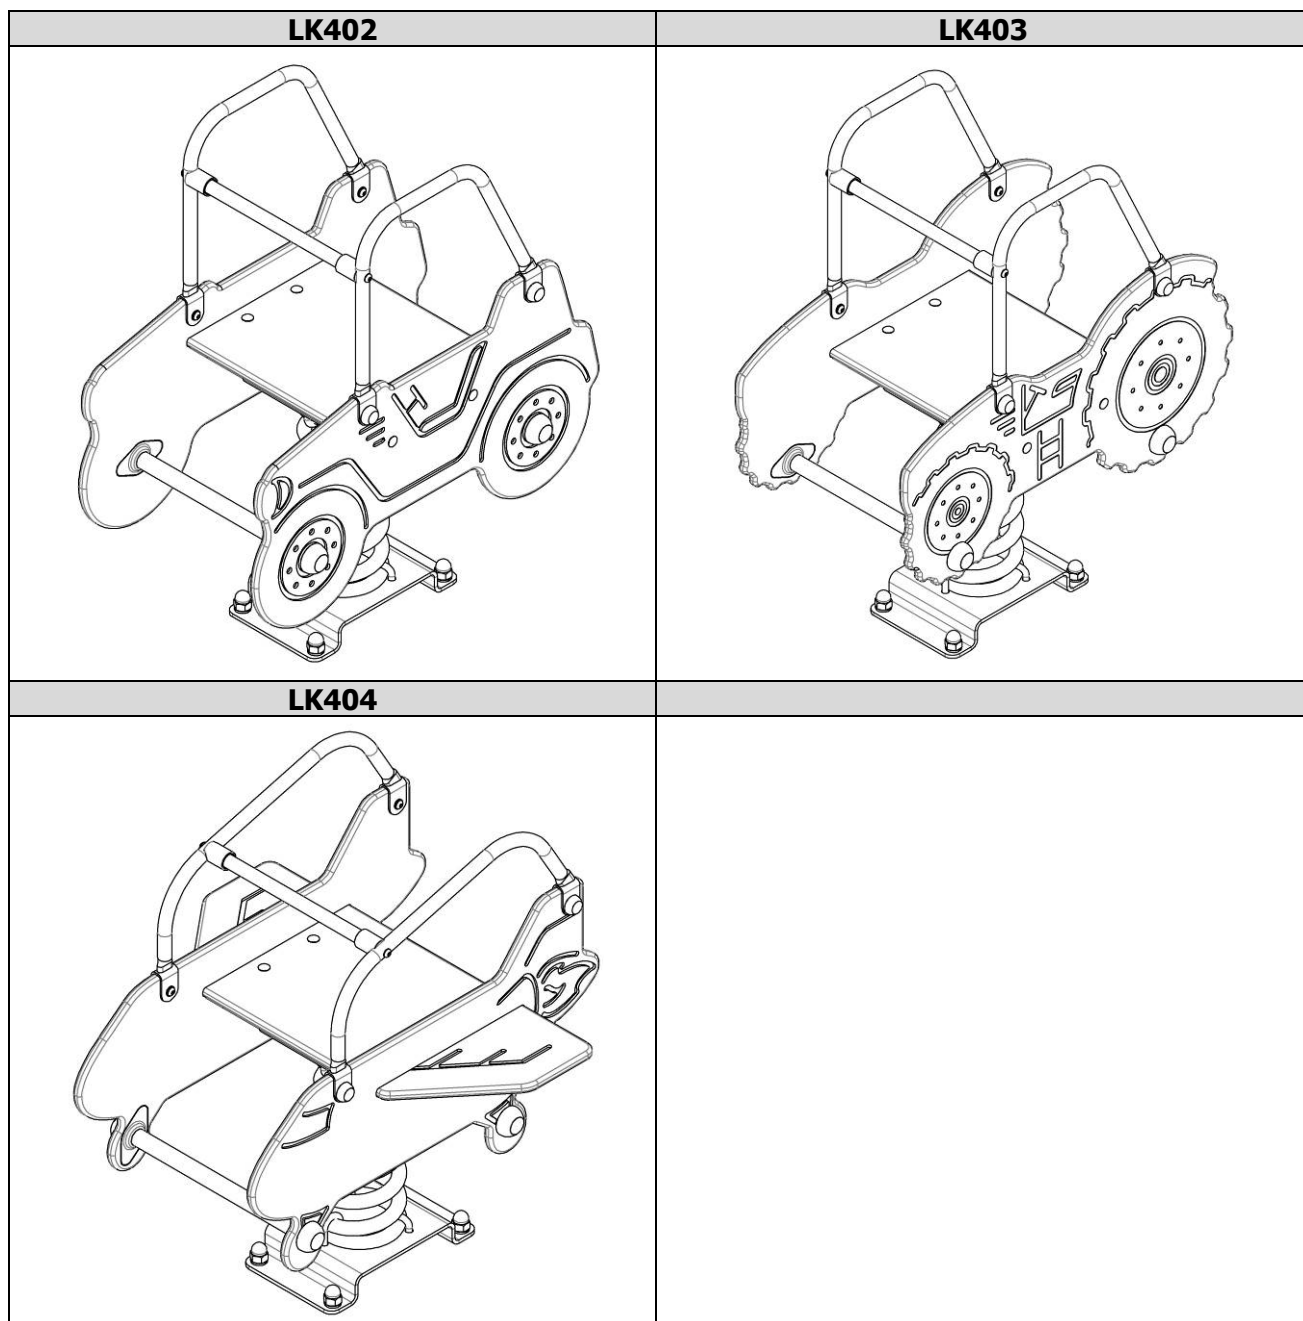
Table 2 – External view

TE243.1	TE249
	
TE249.1	TE250.1
	
TE254	TE255
	

TE256 	TE257 
TE258 	TE259 
TE266 	TE267 

TE280 	TE281 
TE282 	TE283 
TE284 	TE285 

TE286 	TE287 
TE288 	TE289 
TE290 	LK401 



3. COMPONENTS AND CHARACTERISTICS OF THE MAIN PARTS OF THE PRODUCT

Table 3

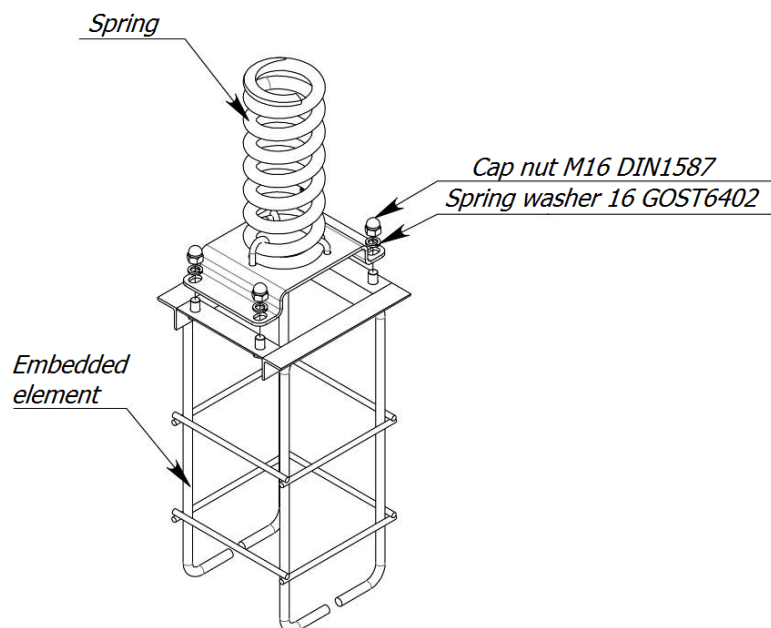
Nº	Name	Quantity	Weight,kg
1	Swing	1	
2	Embedded element	1	10
3	Cap nut M16 DIN1587	4	
4	Spring washer 16 GOST6402*	4	

4. PRODUCT ASSEMBLY AND INSTALLATION PROCEDURE

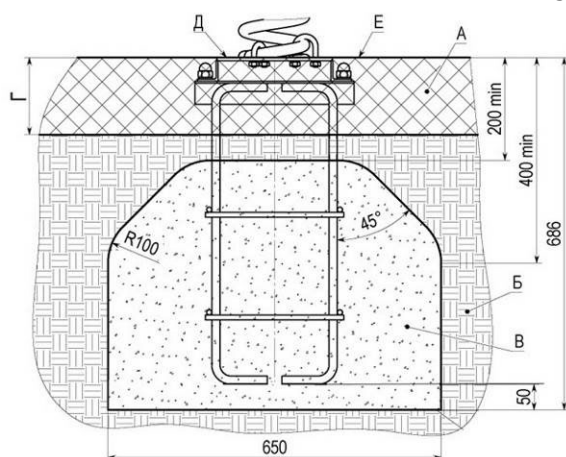
Tools and accessories. The product does not include the tools required for installation.

The procedure for assembling and installing the product.

- 1) Concrete the embedded element according to pic. 2.
- 2) Install and fasten the swing according to pic. 1 and the equipment shown in table 3. The level of the playing surface "E" coincides with the plane "D" of the embedded element (see pic. 2). During installation of the product on sandy soil, the overall dimensions of the foundation should be increased by 15-20%.



Picture 1



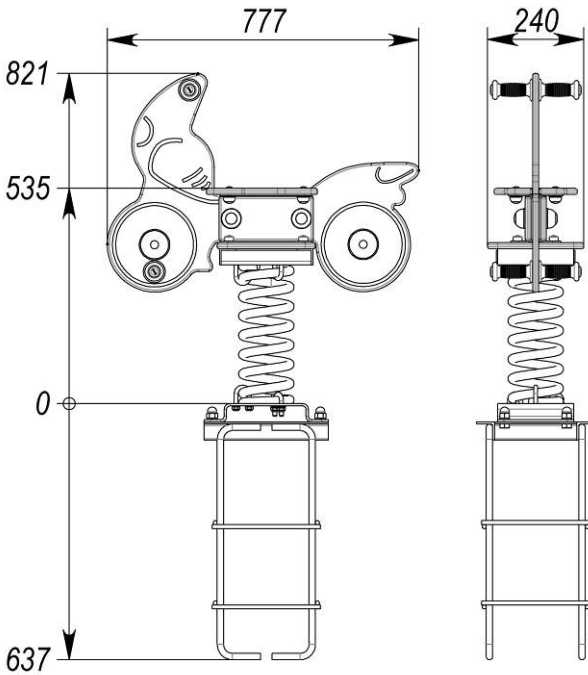
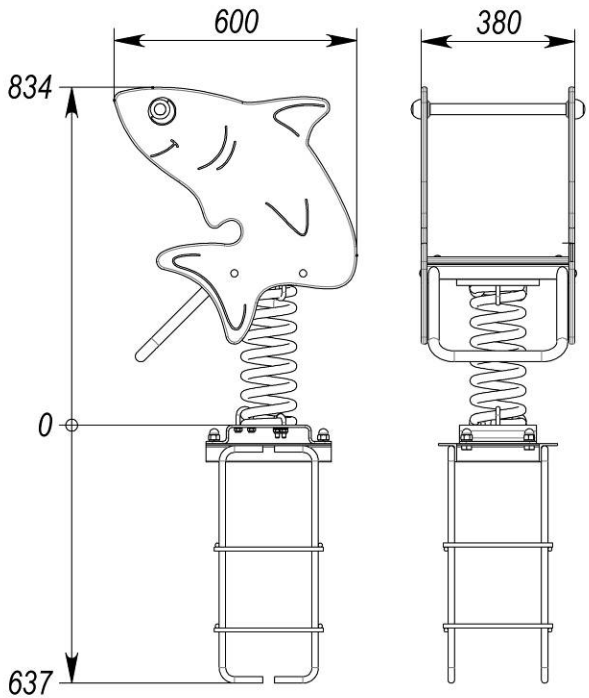
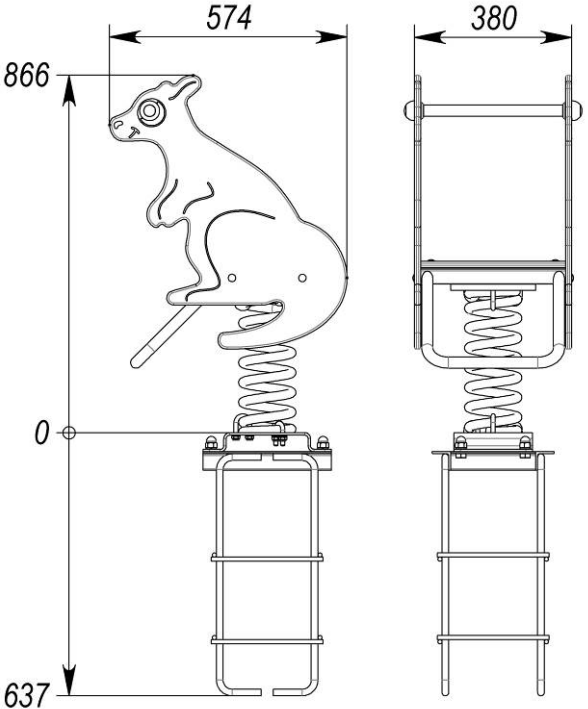
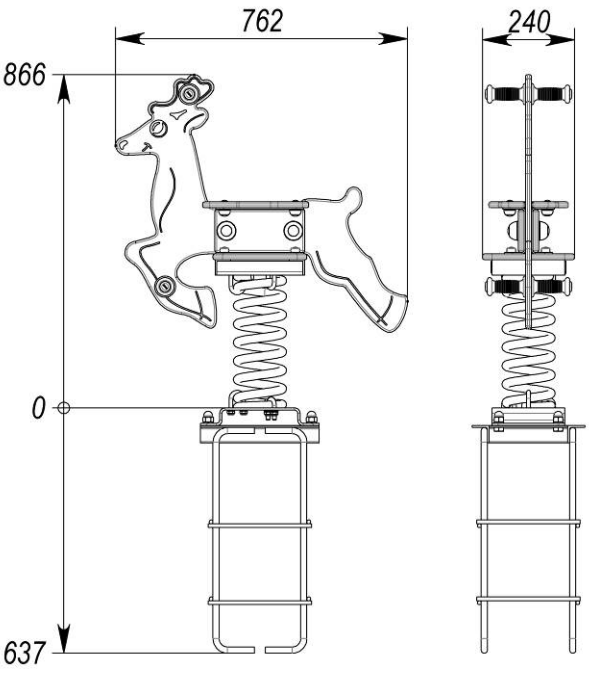
A - shock-absorbing coating;
 B - soil;
 B - concrete;
 Γ - depth of the shock absorbing coating;
 D - product level plane;
 E - game surface.

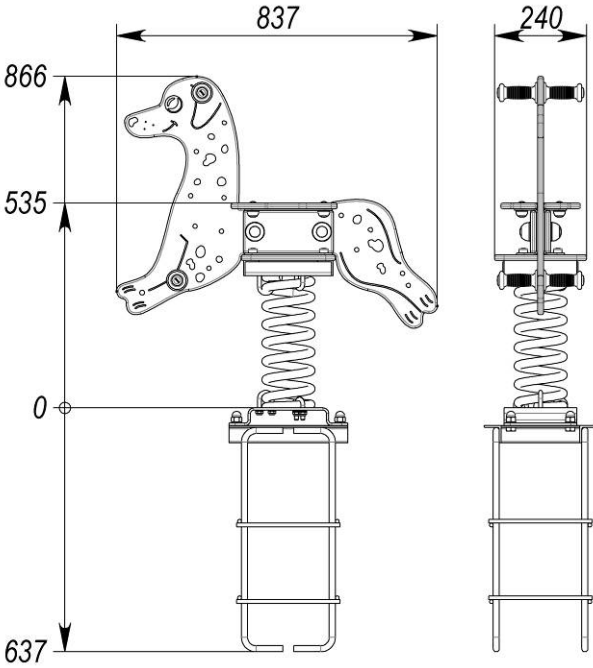
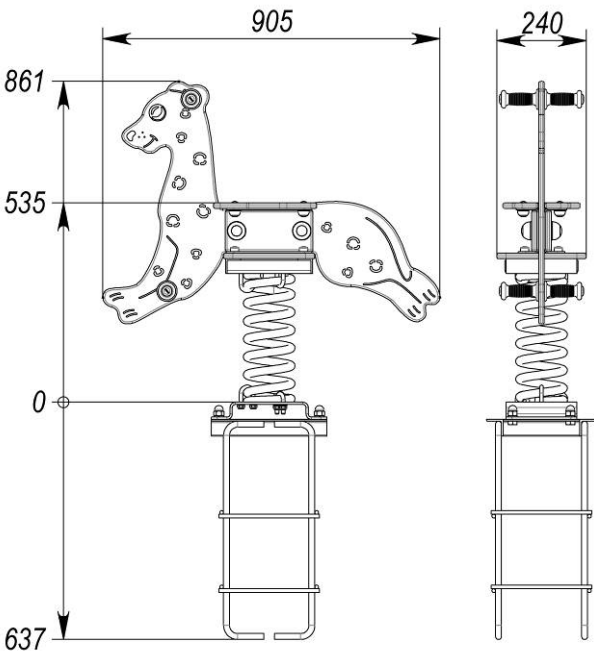
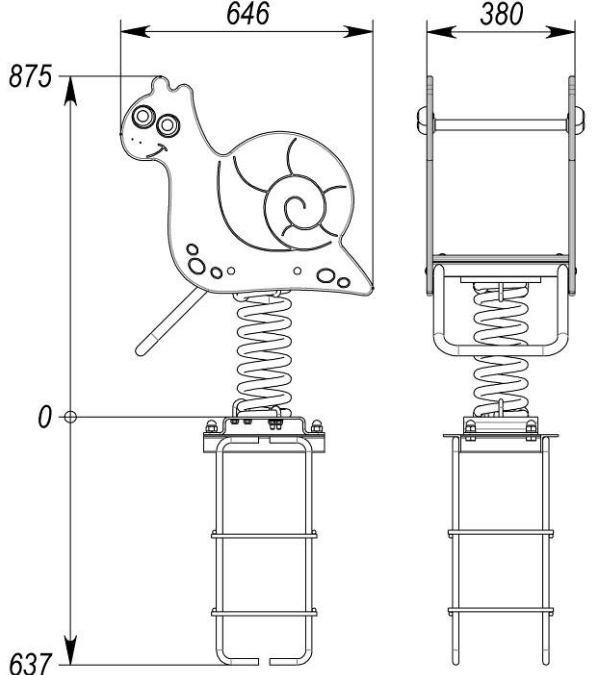
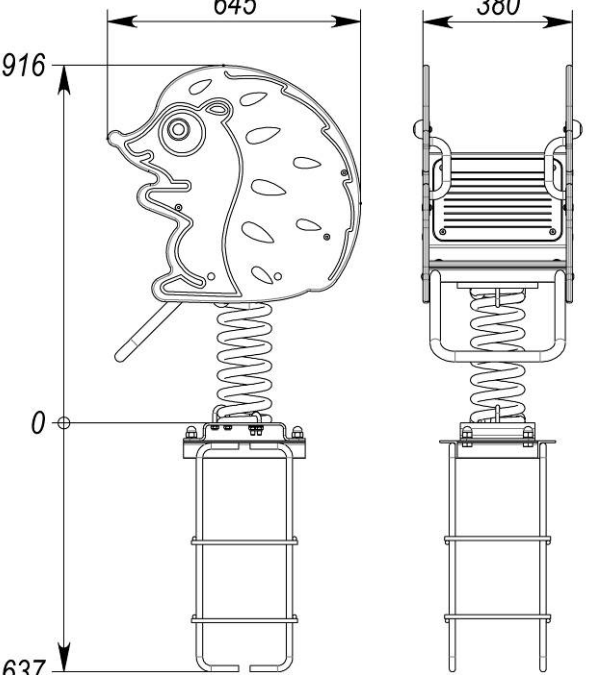
Picture 2 – Concreting scheme
Examples of impact-absorbing coatings

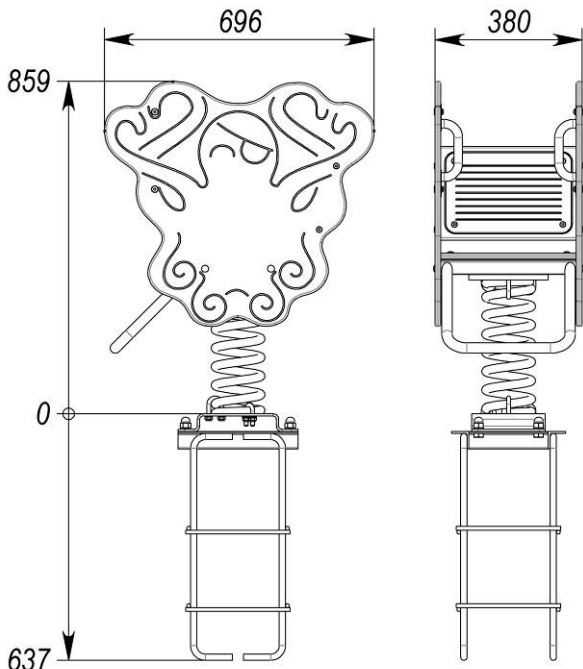
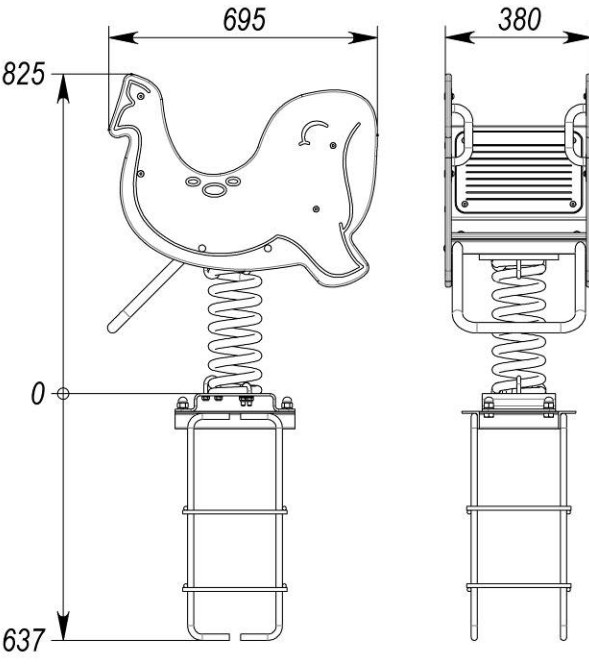
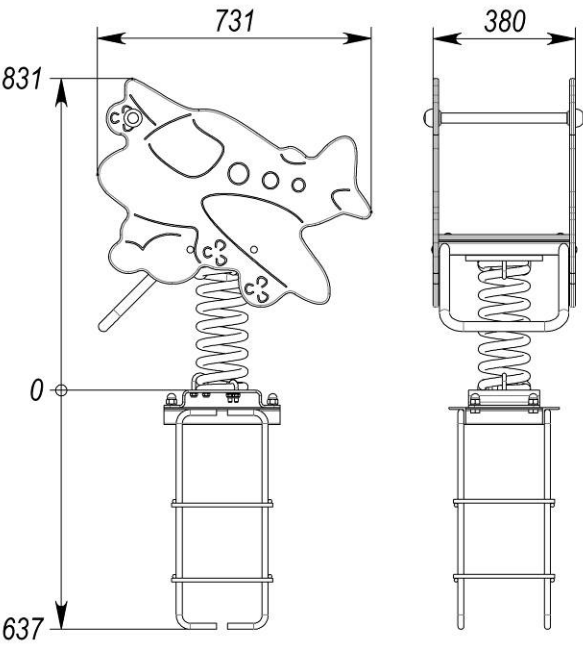
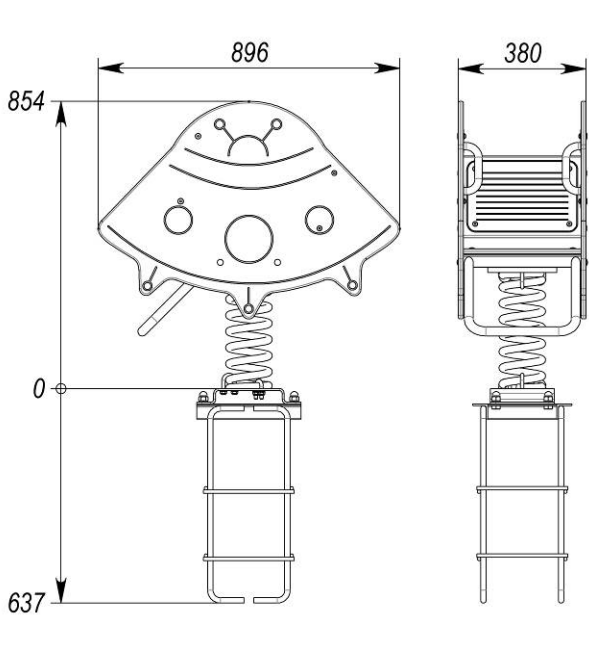
Material ¹	Description	Minimal depth, mm	Free height of fall, mm
Turf			≤1000
Tree bark	grain size 20-80 mm	200	≤2000
		300	≤3000
Sawdust	grain size 5-30 mm	200	≤2000
		300	≤3000
Sand ²	grain size 0,2-2 mm	200	≤2000
		300	≤3000
Gravel ²	grain size 2-8 mm	200	≤2000
		300	≤3000
Other materials ³	Characteristics of the tested material		Critical free height of fall, obtained during testing

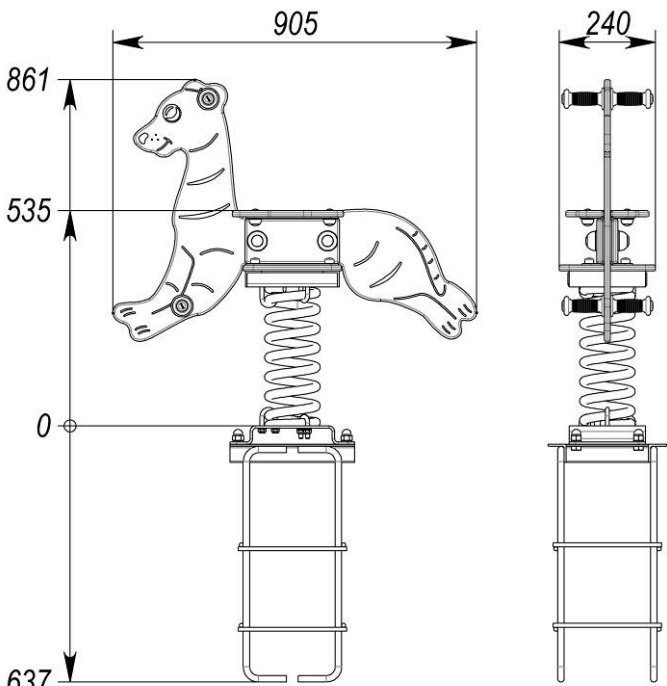
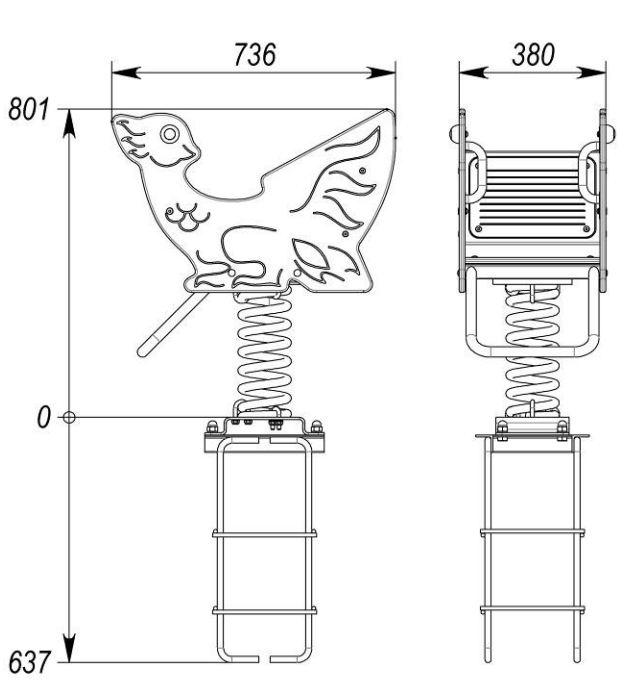
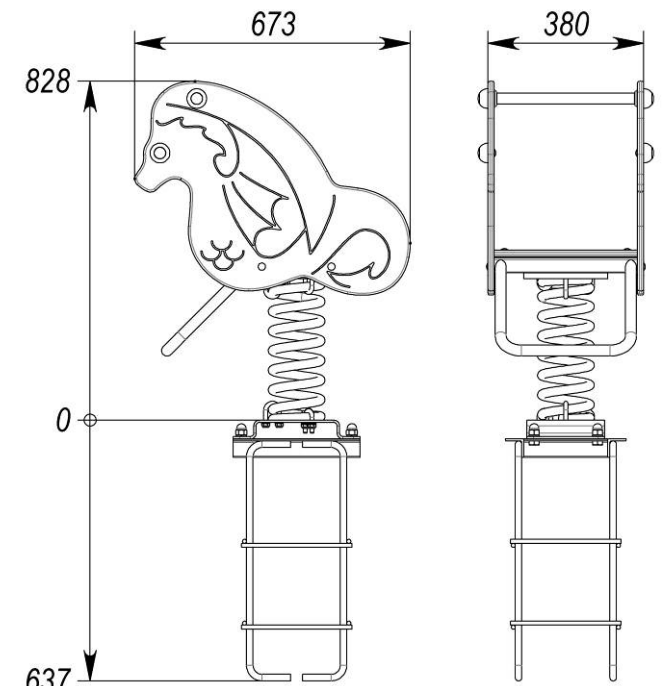
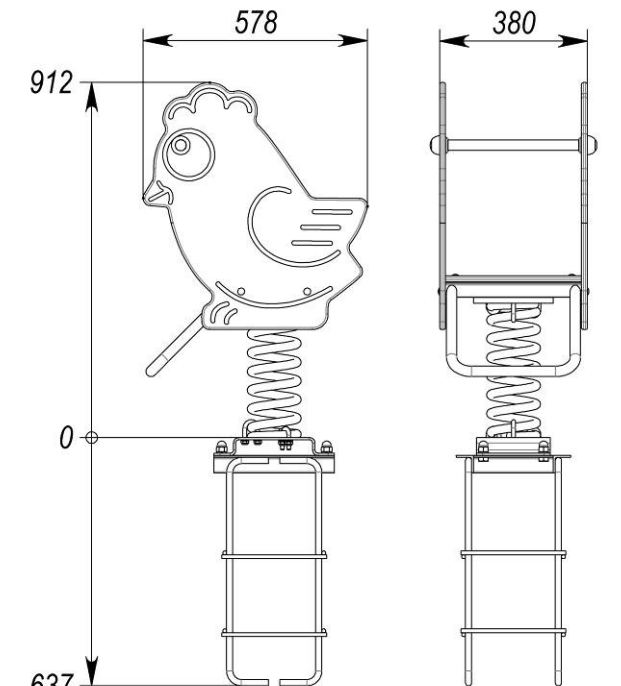
1. Materials specially prepared for playgrounds.
2. There should not be any clay inclusions.
3. The grain size is obtained by sieving through a sieve as in EN933-1.

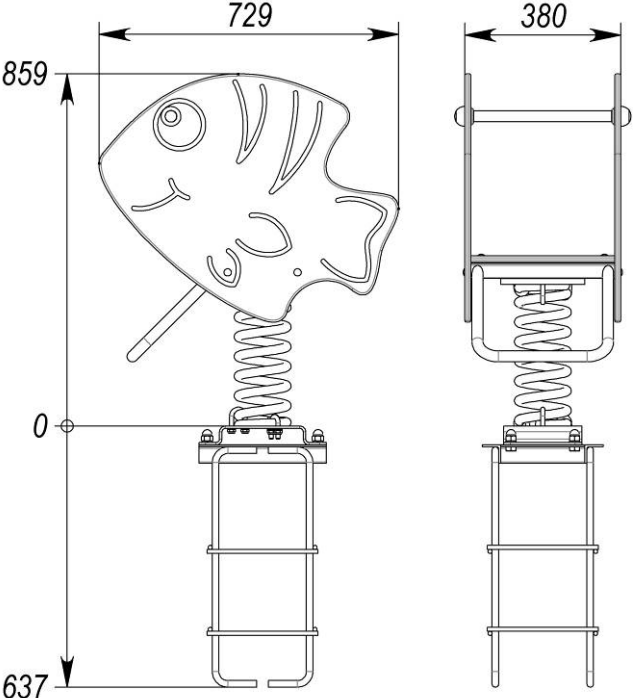
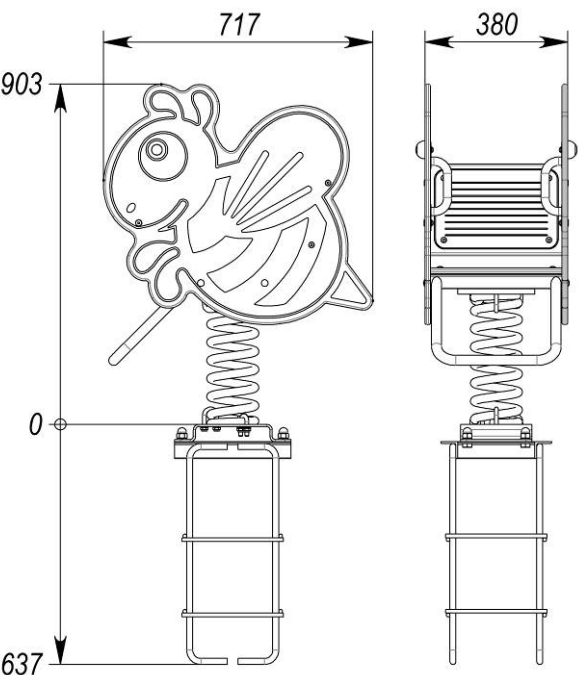
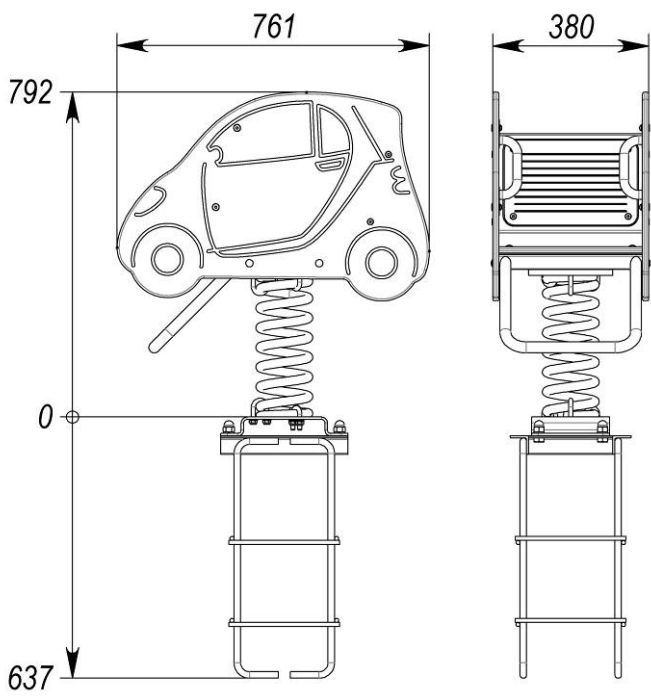
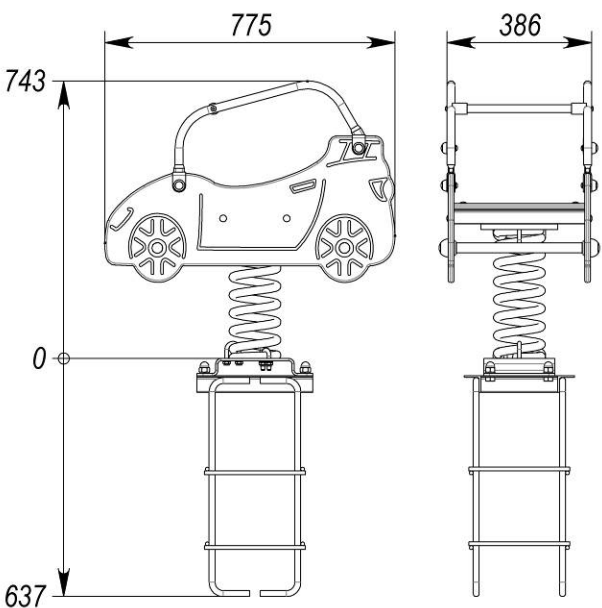
Overall dimensions	
TE243.1	TE249
Technical drawing of the TE243.1 playground equipment. The front view shows a width of 821 and a height of 911. The side view shows a width of 380. A reference line '0' is indicated at the base of the spring mechanism. The height from the base to the top of the structure is 637.	Technical drawing of the TE249 playground equipment. The front view shows a width of 582 and a height of 842. The side view shows a width of 380. A reference line '0' is indicated at the base of the spring mechanism. The height from the base to the top of the structure is 637.
TE249.1	TE250.1
Technical drawing of the TE249.1 playground equipment. The front view shows a width of 707 and a height of 890. The side view shows a width of 380. A reference line '0' is indicated at the base of the spring mechanism. The height from the base to the top of the structure is 637.	Technical drawing of the TE250.1 playground equipment. The front view shows a width of 574 and a height of 835. The side view shows a width of 380. A reference line '0' is indicated at the base of the spring mechanism. The height from the base to the top of the structure is 637.

TE254	TE255
	
TE256	TE257
	

TE258	TE259
 Technical drawing of playground equipment TE258. The front view shows a dog-shaped top with a width of 837 and a height of 866. The side view shows a width of 240. The base has a height of 637. The top of the dog shape is at a height of 535 from the base line (0).	 Technical drawing of playground equipment TE259. The front view shows a dog-shaped top with a width of 905 and a height of 861. The side view shows a width of 240. The base has a height of 637. The top of the dog shape is at a height of 535 from the base line (0).
TE266	TE267
 Technical drawing of playground equipment TE266. The front view shows a snail-shaped top with a width of 646 and a height of 875. The side view shows a width of 380. The base has a height of 637. The top of the snail shape is at a height of 0 from the base line (0).	 Technical drawing of playground equipment TE267. The front view shows a snail-shaped top with a width of 645 and a height of 916. The side view shows a width of 380. The base has a height of 637. The top of the snail shape is at a height of 0 from the base line (0).

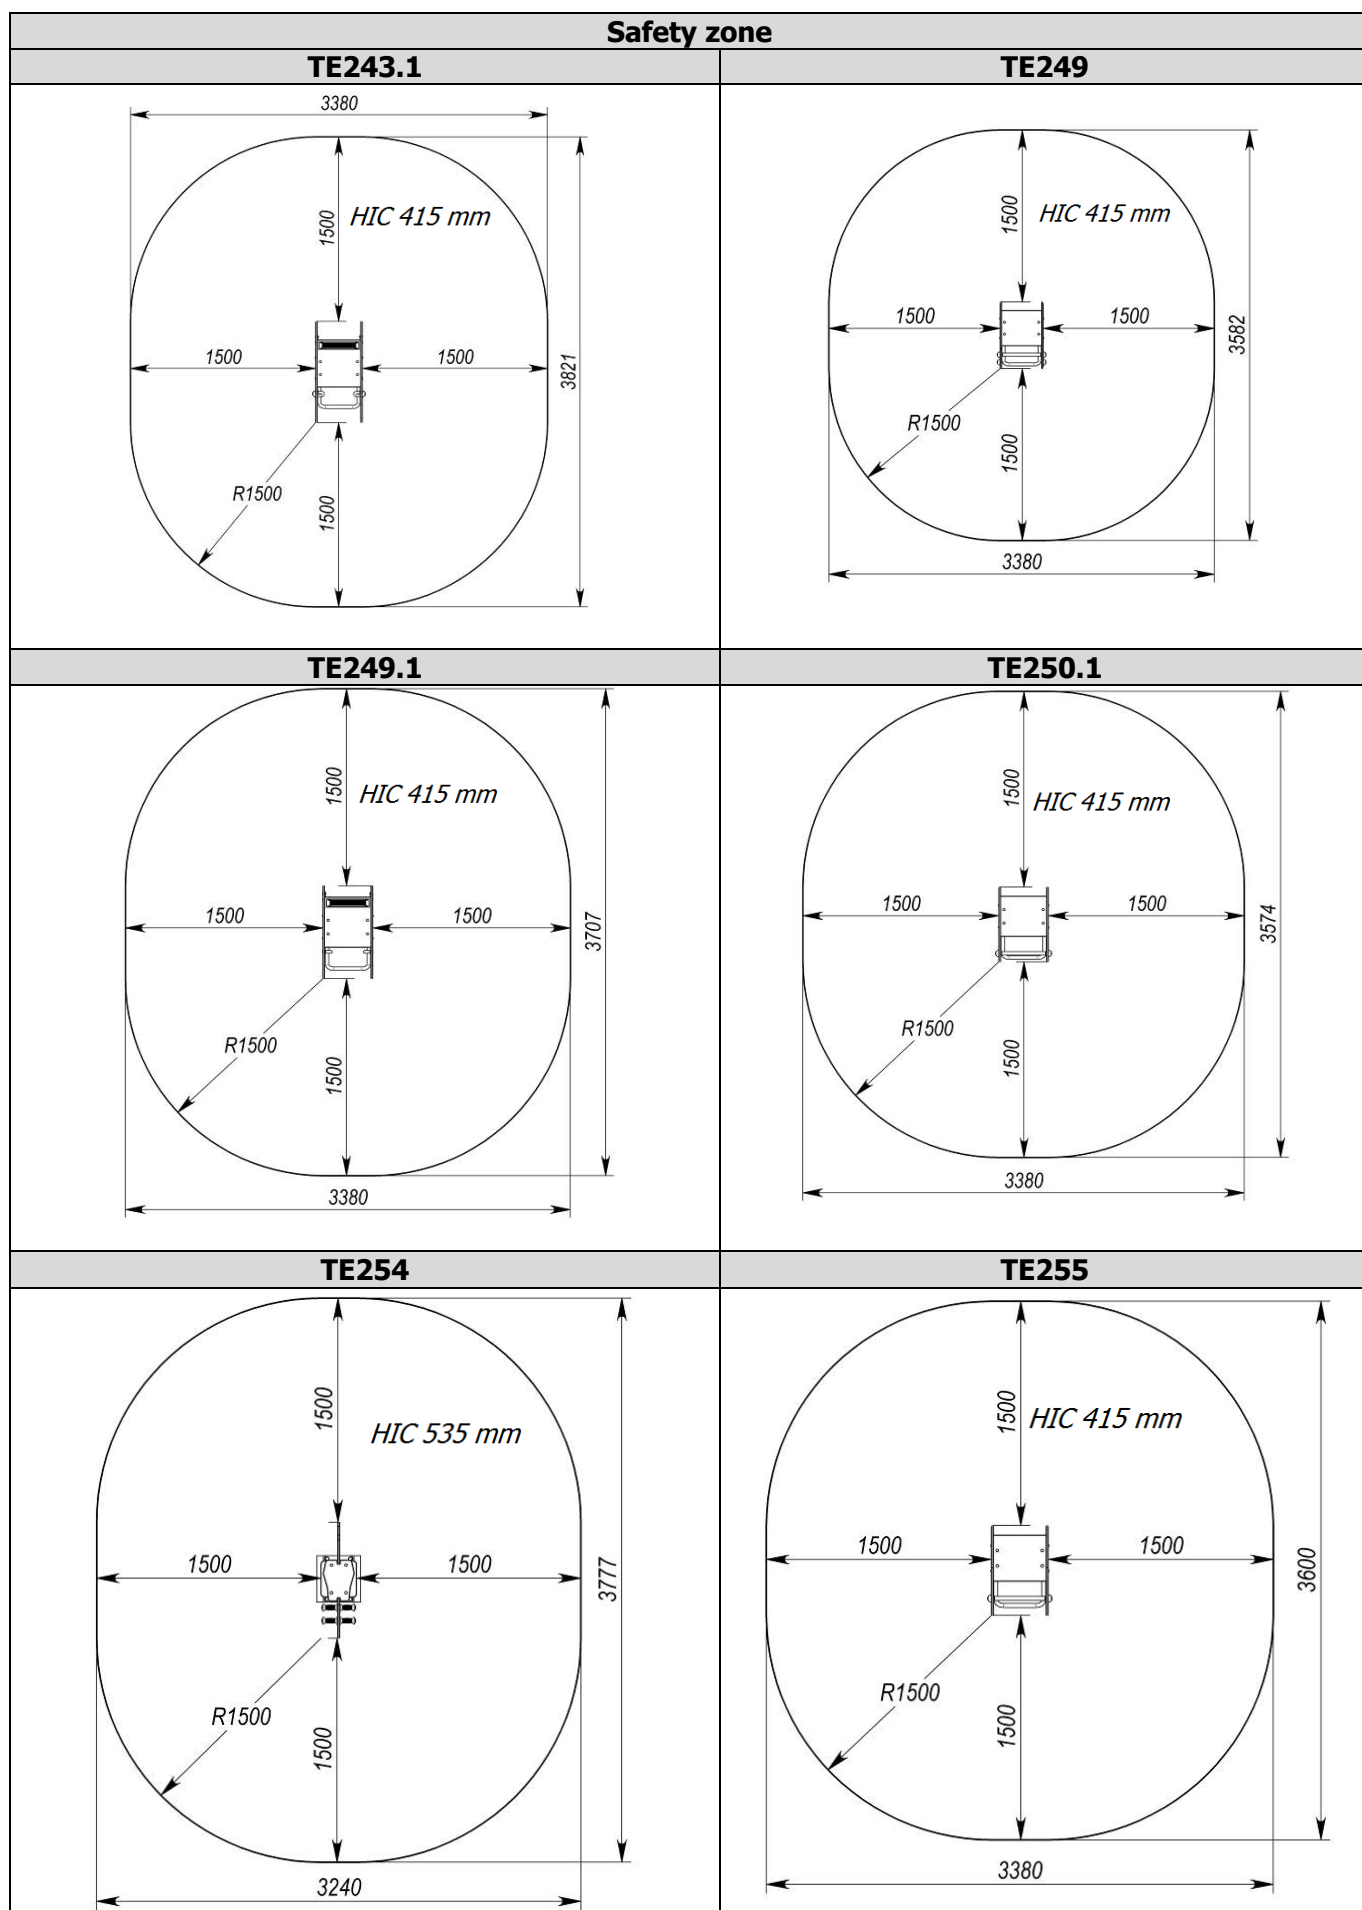
TE280	TE281
	
TE282	TE283
	

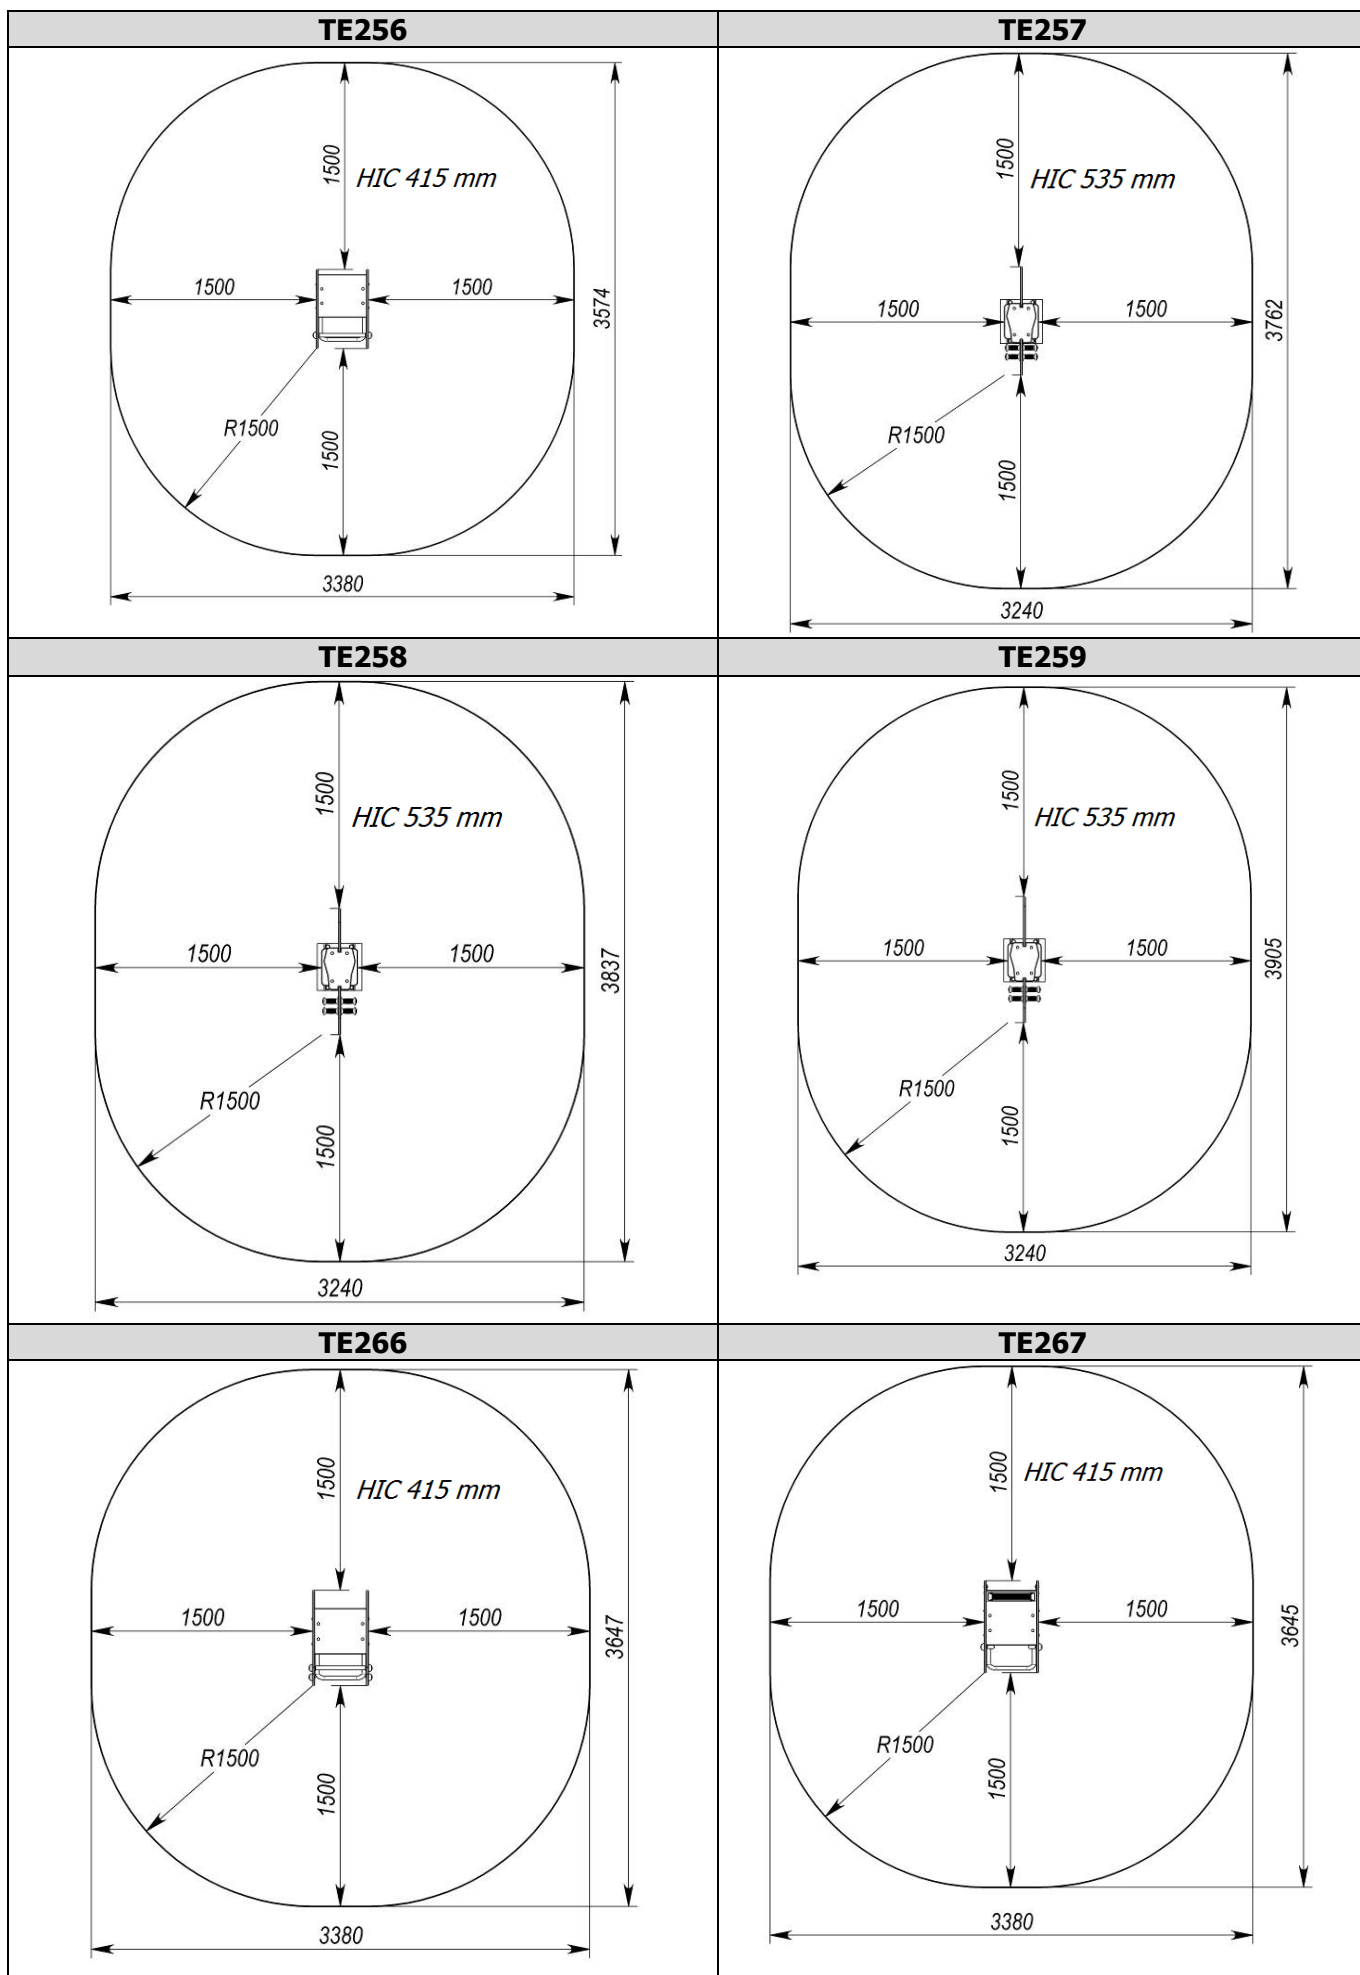
TE284	TE285
	
TE286	TE287
	

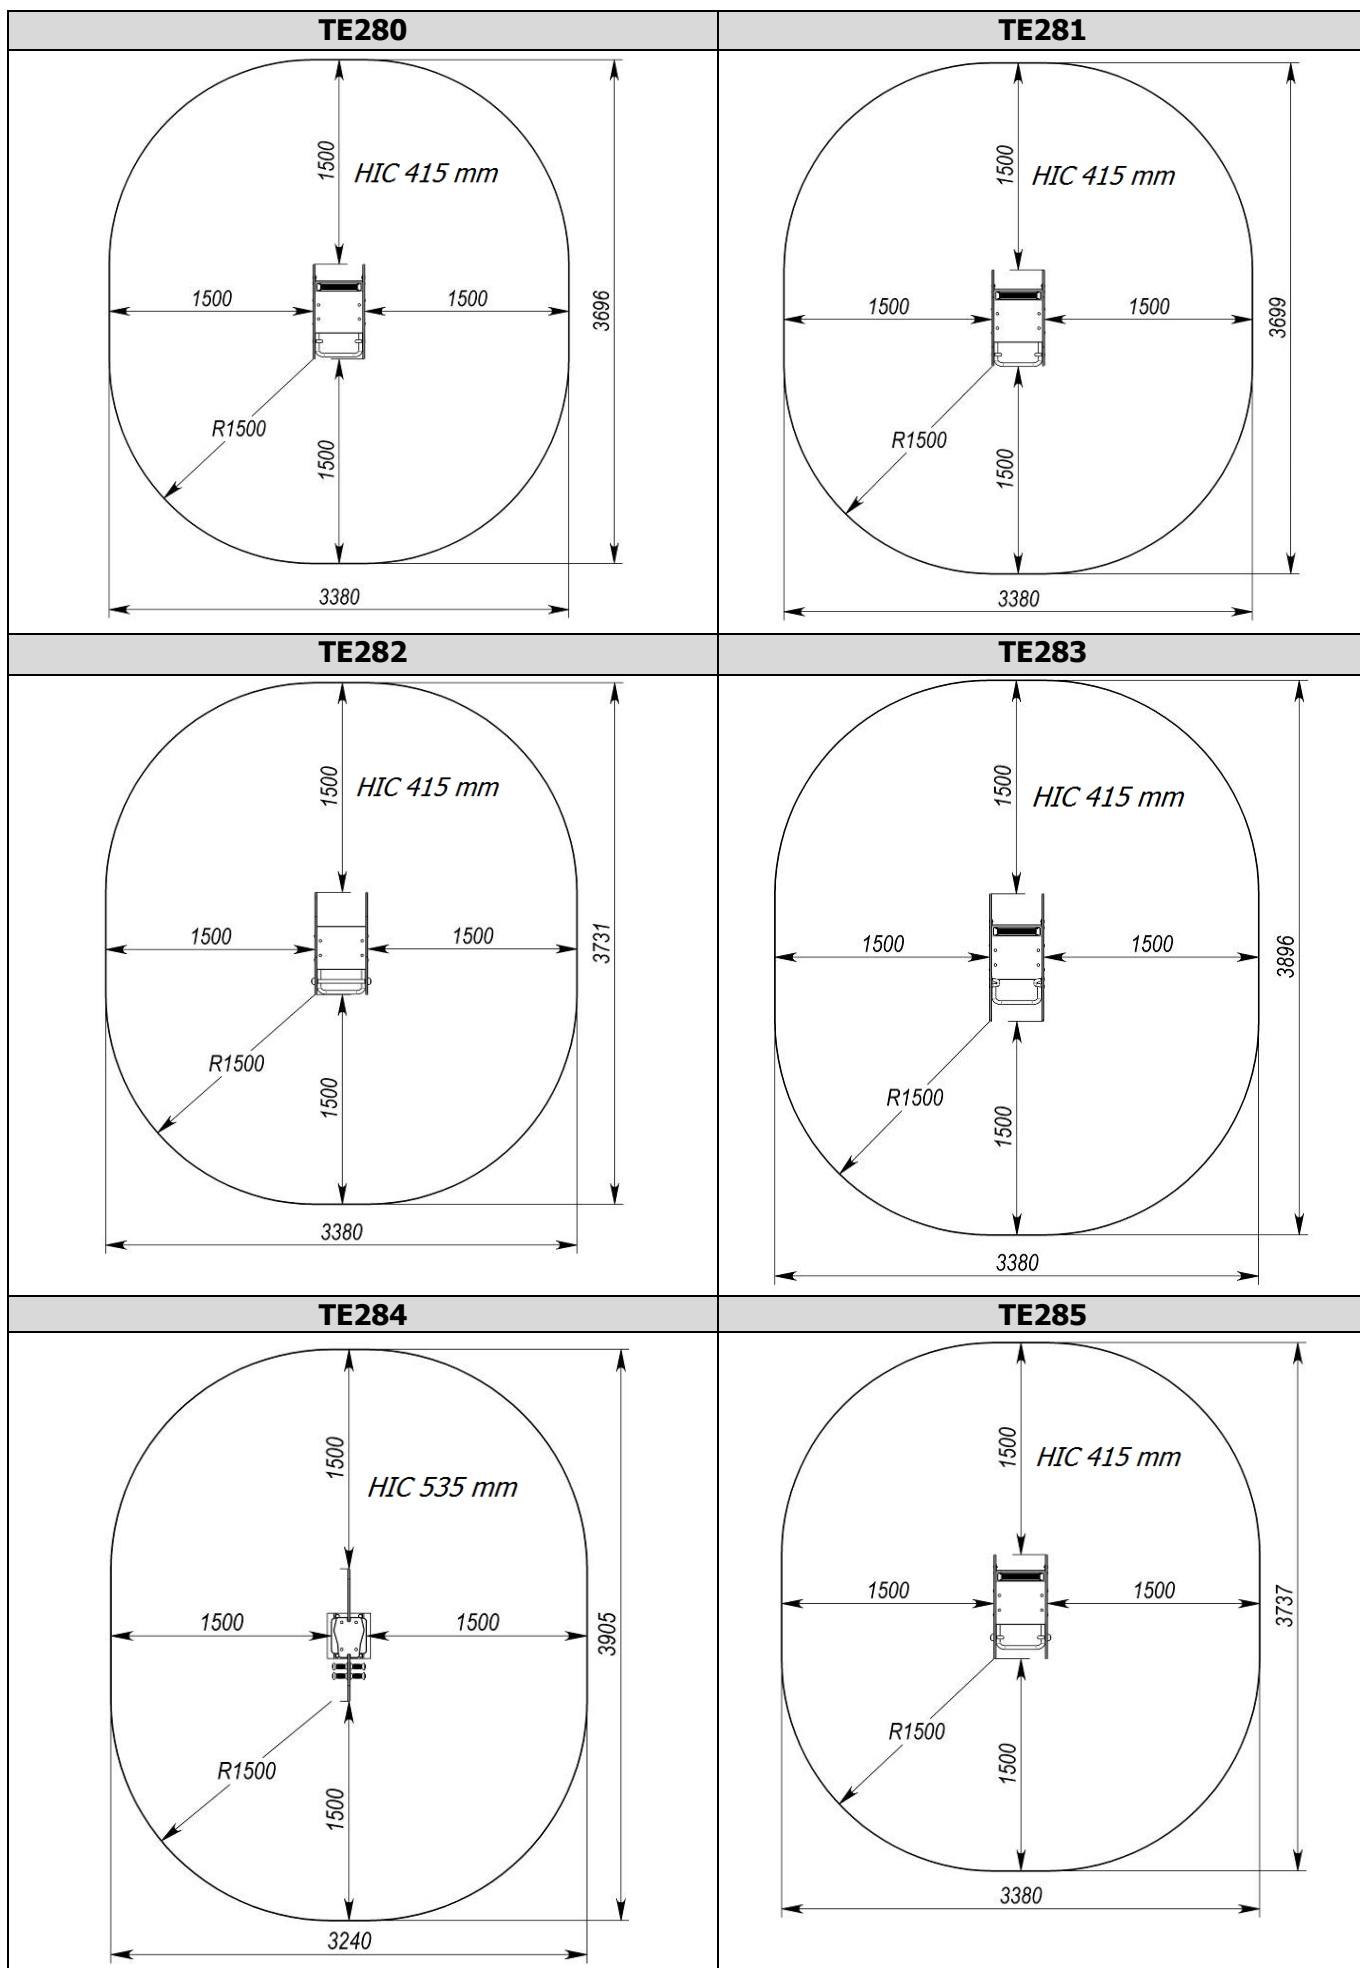
TE288	TE289
	
TE290	LK401
	

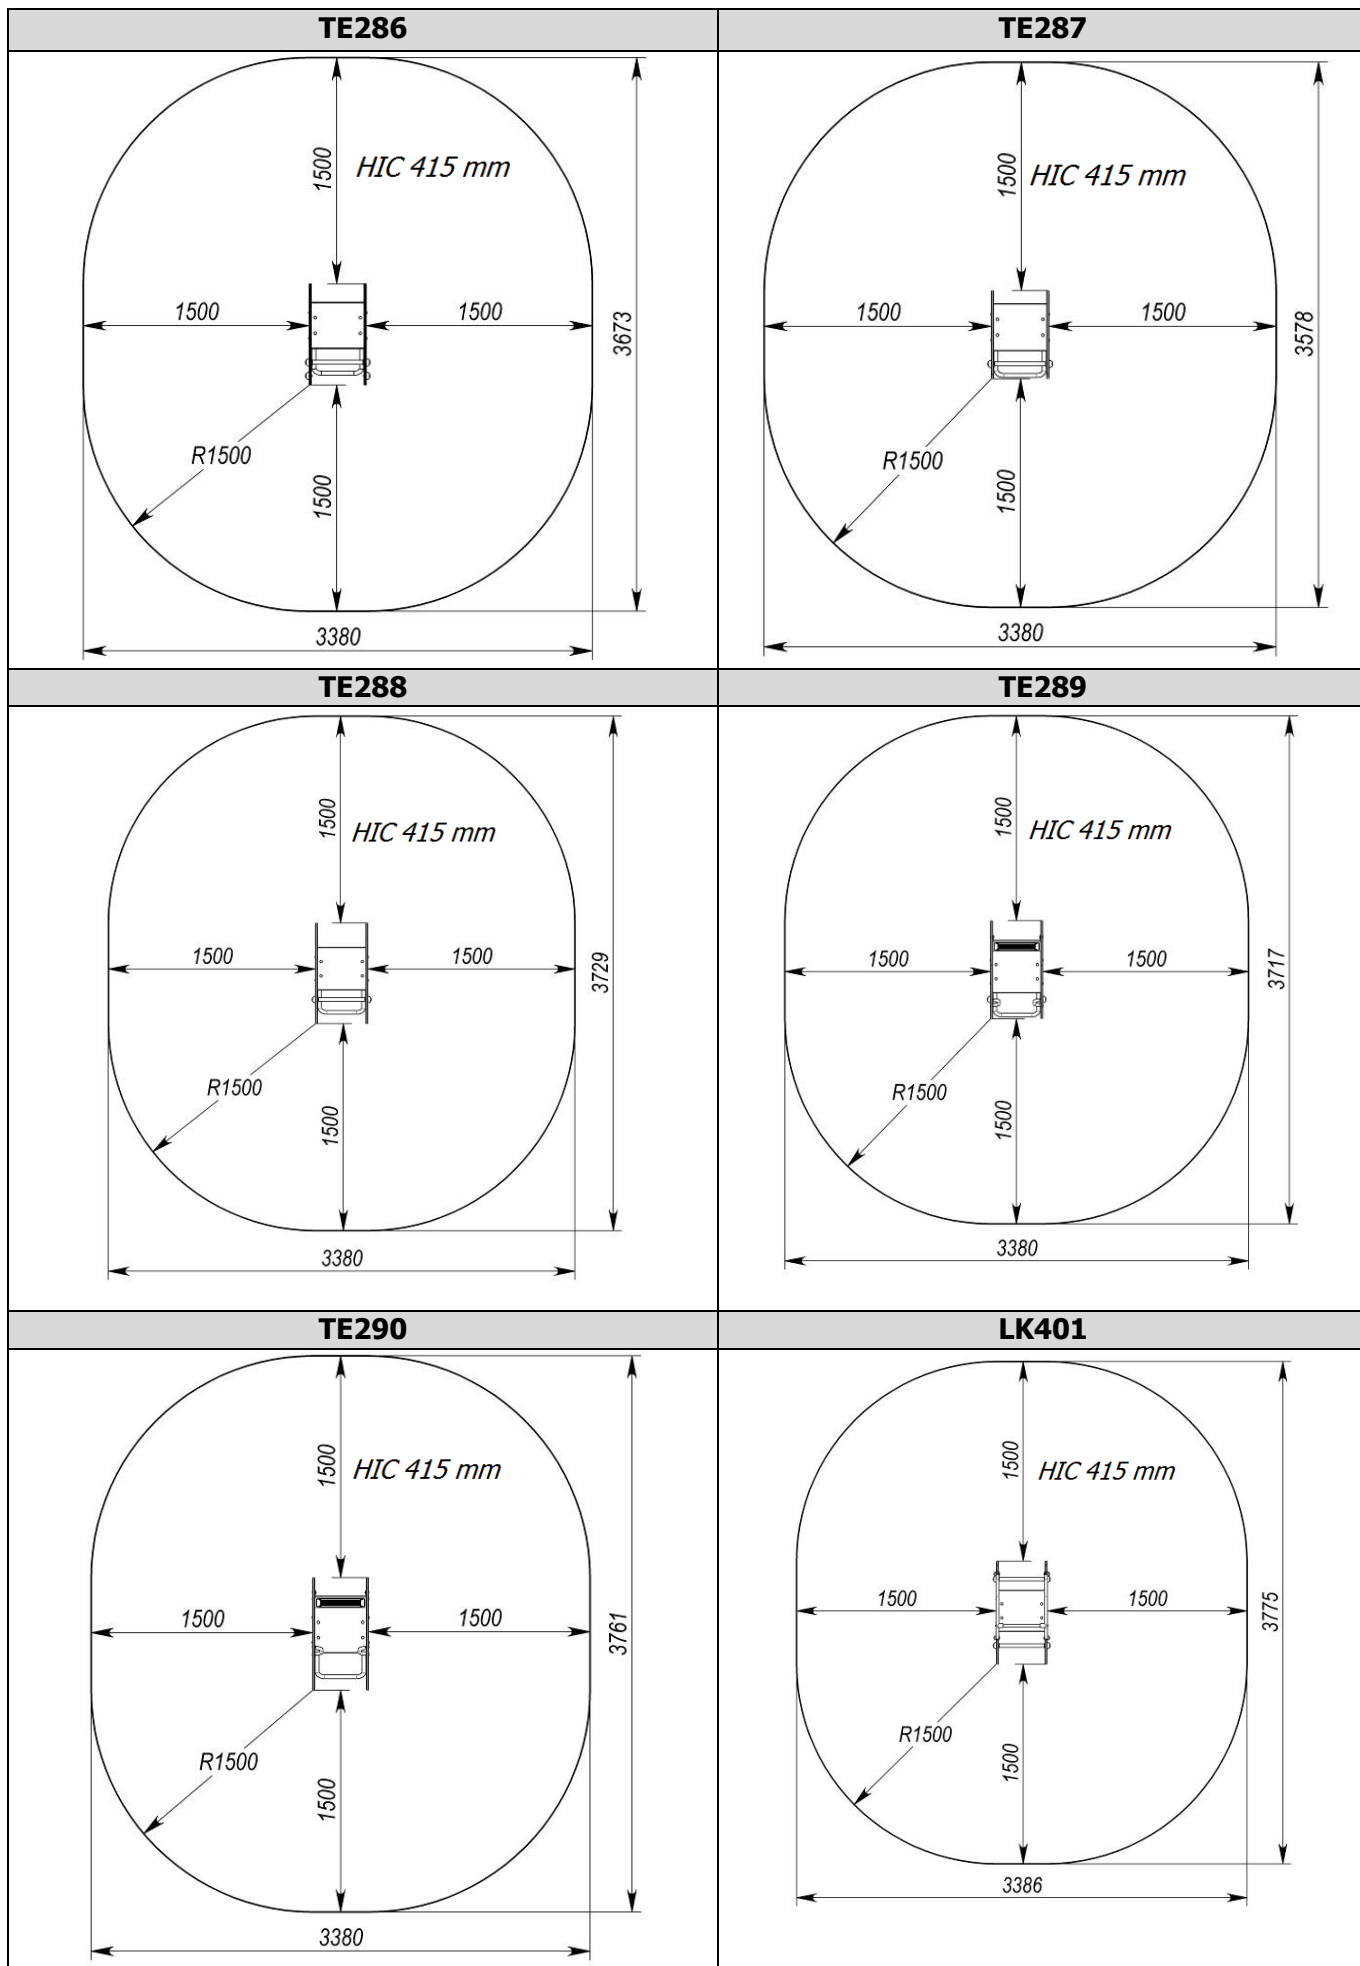
LK402	LK403
Technical drawing of the LK402 playground equipment. It shows two views: a front view on the left and a side view on the right. The front view has a width dimension of 729 and a height dimension of 799 from the base to the top of the frame. A reference point '0' is marked at the base of the frame, and a height dimension of 637 is shown from the base to the top of the frame. The side view has a width dimension of 386. Both views show a spring mechanism connecting the frame to the base.	Technical drawing of the LK403 playground equipment. It shows two views: a front view on the left and a side view on the right. The front view has a width dimension of 727 and a height dimension of 833 from the base to the top of the frame. A reference point '0' is marked at the base of the frame, and a height dimension of 637 is shown from the base to the top of the frame. The side view has a width dimension of 386. Both views show a spring mechanism connecting the frame to the base.
LK404	
Technical drawing of the LK404 playground equipment. It shows two views: a front view on the left and a side view on the right. The front view has a width dimension of 732 and a height dimension of 729 from the base to the top of the frame. A reference point '0' is marked at the base of the frame, and a height dimension of 637 is shown from the base to the top of the frame. The side view has a width dimension of 690. Both views show a spring mechanism connecting the frame to the base.	

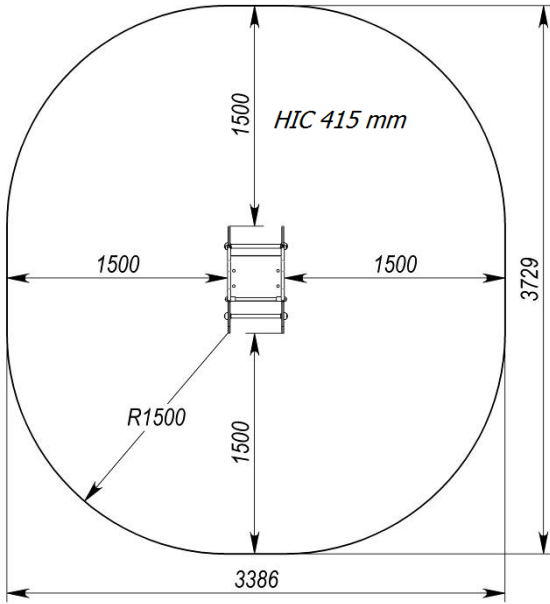
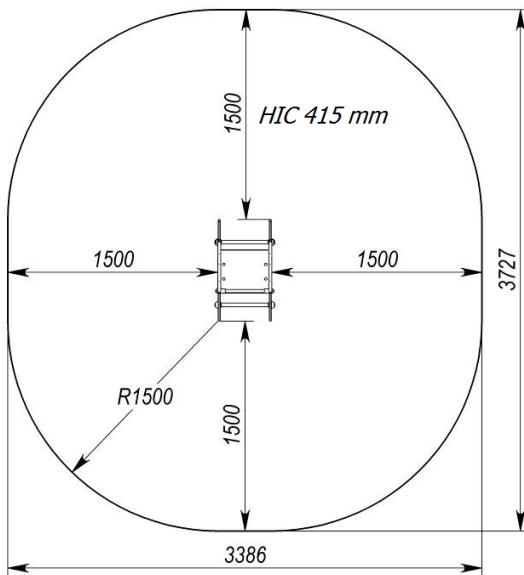
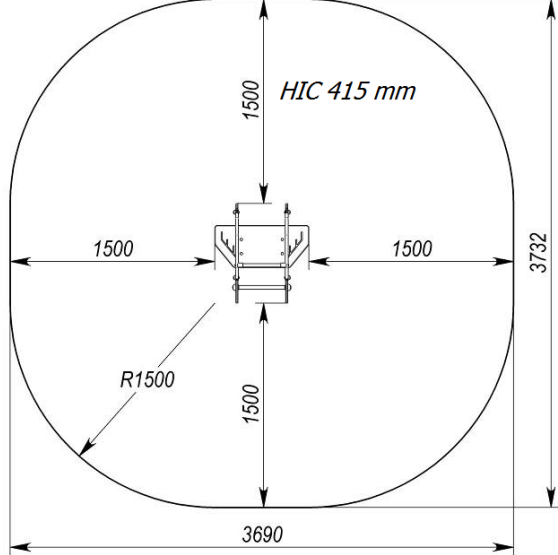
5. INSTALLATION SCHEME OF THE PRODUCT









LK402	LK403
	
LK404	
	

6. USE OF THE PRODUCT

Do not use the product until it has been fully and completely installed.

The product must not be used by users of a different age category.

The product must not be used by users of a different weight category.

Before using the product, clear the safety area of any unnecessary objects that may cause damage to the user (debris, tools left over from assembly and installation, etc.).

Do not use the product in adverse weather conditions (ice, snow, rain, hail, strong winds, etc.), which may cause injury to the user.

7. PRODUCT MAINTENANCE

You have purchased high-quality and reliable equipment. In the process of its production, the requirements of regulatory and technical documents of Ukraine, the CIS countries and the European Union regulating the production of children's gaming equipment were taken into account. However, it should not be forgotten that when operating any technical product, certain rules and requirements must be followed. Despite the fact that our product is of high quality and reliability, this rule applies to it in full. You should be aware that the implementation of the following rules and recommendations for product maintenance is aimed at ensuring that your child, the child of your friends or acquaintances is safe and no unforeseen factors threaten his health, life.

Remember that the operation of the product is accompanied by the influence of various negative factors on it, a complete list of which cannot be predicted. Among them, an important place is occupied by natural factors and factors caused by human influence on equipment. As a rule, their action initially leads to disruptions in the appearance of the product. Thus, under the influence of factors caused by the exploitation of a person, there may be damage to the integrity of the paint coating of parts made of wood, in the form of scuffs, chips, incisions, and when exposed to parts made of metal, damage to the paint coating in the form of nicks, chips, abrasion, etc. This leads to the emergence and development of defects that can be the cause of the destruction of the product. The product is particularly dangerous if it is used for other than its intended purpose, if the permissible loads are exceeded, or if vandalism occurs, as these factors can cause irreversible changes in the structure of the material from which the product is made, leading to destruction.

The maintenance of the product implies, first of all, the responsibility of the user to comply with all recommendations provided in this document, starting with a daily inspection of the external condition of the product before operation.

Daily inspection of the product is a very important procedure. With its help, you can timely detect any changes in the appearance of the product (deformation of individual parts, deformation of the structure as a whole or part of it, damage to parts, cracks of welds, as well as the absence of fastening of parts of the product, etc.).

Before using the product, check its operability, absence of damage, dirt on the product, sharp edges, reliability of fixing the structure, absence of unnecessary objects on the surface of the site. If the product is damaged, fully or partially inoperable, or has any other defects, do not use it.

During operation it is also necessary to inspect the condition of the product periodically - the current inspection. It includes an external inspection of the product, checking its operability (in the presence of moving elements - the smoothness of the movement of mechanisms, compliance with operating modes, etc.). Current inspection allows you to detect malfunctions caused by the operation of equipment, climatic conditions, acts of vandalism and other factors, until they reach a critical level and the destruction of the product. The current inspection is carried out in order to detect foreign objects that may threaten the user and lead to violations of the functioning of the product. The frequency of the current inspection is set by the owner taking into account the operating conditions. If you do not have sufficient technical knowledge and skills to conduct such inspections, we recommend you to contact the authorized specialists of the manufacturer in order to obtain advice.

Every three months, a scheduled inspection should be carried out, which primarily concerns the foundation part, load-bearing elements and connection nodes of elements (their integrity and degree of deterioration).

The main annual inspection must be carried out annually by authorised specialists of the manufacturer. During the inspection, the technical condition of the equipment shall be assessed for compliance with safety requirements. The degree of deterioration and damage to wooden elements and their ability to withstand the applied loads, damage, corrosion of metal elements and the impact of these factors on the safety of the product are determined. The inspection also helps to identify the impact of repairs, if any, on the safety of the equipment.

Based on the results of the inspection, a maintenance procedure is carried out to eliminate the identified discrepancies in the product's operation. This procedure includes assessing the condition of parts and assemblies, replacing worn parts, and restoring the integrity of protective coatings. The results of the inspections, as well as the procedures carried out as a result of the inspection and maintenance of the product must be properly documented in the Registration Journal, which is an integral part of this passport. The owner of the product must keep the acts of maintenance of the product, acts of repair work.

8. INFORMATION ON STORAGE, TRANSPORT AND DISPOSAL

The product is transported in the manufacturer's packaging by any means of transport that ensures its safety and protection from external factors (rain, snow, sunlight, water, high humidity, etc.).

Information about transportation

Date		Brand, state number of the ca/trailer	Position, full name	Signature
Departure	Arrival			

Before installation, store the product in the original packaging in dry, closed rooms with natural air ventilation.

If it is necessary to transport the product to another location after use, it is recommended to use the manufacturer's packaging.

If long-term storage of the product is required, the following storage rules must be observed (the list of conditions is not complete):

- place the product in a closed dry room with natural ventilation;
- protect the product from external factors (dust, water drops, etc.) with a large plastic bag, leaving space for free air circulation;

- take other measures to preserve the appearance and characteristics of the product during storage.

When removing the product from storage and preparing for installation, follow the next recommendations:

- remove the product from the packaging material (polyethylene, cardboard, other packaging materials);

- remove dust and other contaminants from the surface of the product;
- check completeness and absence of parts damage.

Storage information

Date		Product storage conditions	Full name	Signature
Putting into storage	Removal from storage			

After the end of the equipment's service life, the buyer independently determines the procedure for its use. If you decide to recycle, contact the seller or specialized organizations.

The equipment does not contain harmful impurities and materials that can harm your health and is not subject to special recycling.

9. CURRENT REPAIR

All current repairs are carried out only by employees of the «Inter Atletika's» service centre or specialists specially authorised by the company.

10. MANUFACTURER'S (SUPPLIER'S) WARRANTIES

Warranty obligations are valid only for products purchased from Inter Atletika or its official representatives. The supplier guarantees proper operation for 1 (one) calendar year from the date of sale. During the warranty period, "Inter Athletica" undertakes to replace the defective product, its components and parts with new ones or repair these parts and components. In order to agree on the type of action (replacement or repair) regarding the product that has defects, or its components and parts with defects, the company "Inter Atletika" is guided by the provisions of the Law of Ukraine "On the Protection of Consumer Rights". The term in which the replacement or repair of the product is carried out is also established based on the requirements of the Law of Ukraine "On the Protection of Consumer Rights" or by agreement between the buyer and the "Inter Atletika" company. The product or its defective parts and assemblies, which have been replaced with parts and assemblies of proper quality, are subject to return to Inter Atletika, if it has made such a claim.

During the warranty period, only representatives of "Inter Atletika" company or organizations or persons to whom "Inter Atletika" company has granted such right have the right to repair the product.

The Manufacturer (Supplier) does not have warranty obligations, in particular in cases of:

- the presence of abrasion of paint and protective coatings on metal and wooden parts of the product, the appear of corrosion on metal parts, the appear of cracks on wooden parts and changes in the shape of the products, and also in case of other damage and changes in the product, which arose as a result of its natural wear.
- damage to the product as a result of improper use of the product, excess the level of the maximum load or the presence of acts of vandalism;
- installation (assembling) of the product, maintenance of the product or its repair by organizations or persons to whom «Inter Atletika» did not provide such a right;
- changes in the product design or in the case of product operation together with additional equipment and devices that have not been reviewed and approved by «Inter Atletika», as well as in the case of product use for other purposes;
- failure to perform the procedures for maintenance of the item specified in chapter 4 of this document, or not providing documents confirming their conduct;
- failure to comply with other requirements and recommendations of this document or requirements provided for by the current legislation of Ukraine;
- damage to the product or its complete destruction due to natural disaster or natural phenomena.

In case of a product malfunction, the buyer must contact the seller directly with an application, which must contain photographs of the malfunction, a detailed description of the features, reasons and situation in which the malfunction occurred, information about the place of use, date and place of purchase of the product, passport details, place of permanent residence and contact phone number. The application shall be accompanied by a receipt of the purchase of the product (or other documents confirming the fact of purchase), a passport for the equipment, as well as documents confirming the maintenance or repair.

Address of the central service centre:

08292, Ukraine, Kyiv region, Bucha, Instytut'ska Str. 17-b, phone number: (044) 391-33-99).

