
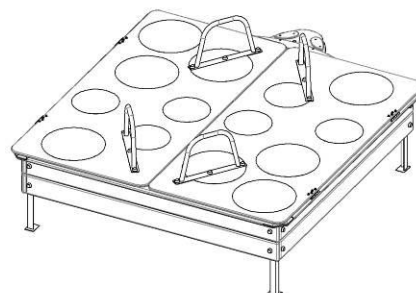
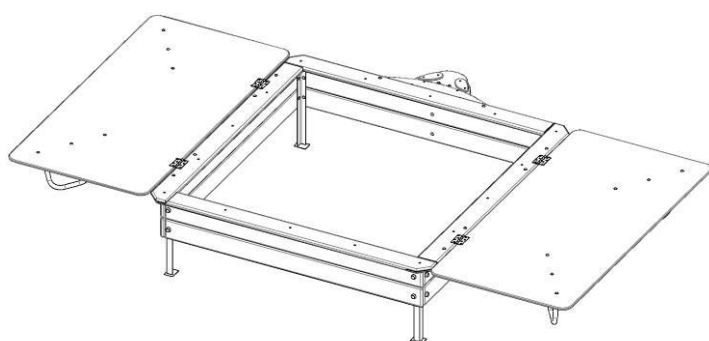



DATA SHEET

Sandbox T314(-RC), T314.1

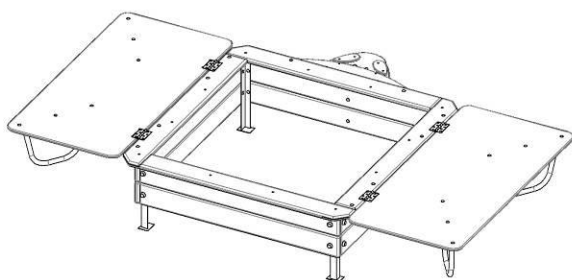

Chapter

Page

FOR NOTES

This image shows a blank sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

1. GENERAL INFORMATION

Purpose and content of this document. This document contains a general description of the equipment, information on installation, intended use, maintenance, current repair and manufacturer's warranty.

Distribution of this document for product modifications. The manufacturer can make changes to the design of the product, aimed at improving its characteristics, changing the design, etc. This document may not contain a description of such changes, but applies to such modified products.

2. MAIN TECHNICAL DATA AND CHARACTERISTICS

Sandboxes are designed for children **aged 1 to 6 years**, with a maximum **user weight up to 60 kg**.

Table 1 – General characteristics of sandboxes.

	T314	T314.1
Length, mm	1739	2244
Width, mm		
- open	2902	3963
- closed	1463	1974
Height, mm		
- open	319	319
- closed	625	625
Weight, kg	80	116
Height of fall, mm	310	310
Working space	Outdoors	
Age restrictions	From 1 to 6 years	

The product is delivered unassembled. See the appendix for the names of the main components of the product.

3. COMPONENTS AND CHARACTERISTICS OF THE MAIN PARTS OF THE PRODUCT


The names and characteristics of the main components of the product are presented in the appendix.

4. PRODUCT ASSEMBLY AND INSTALLATION PROCEDURE

Tools and accessories. The product does not include the tools required for installation.

The procedure for installing the product.


- 1) Assemble the sandbox frame as shown in the drawing.

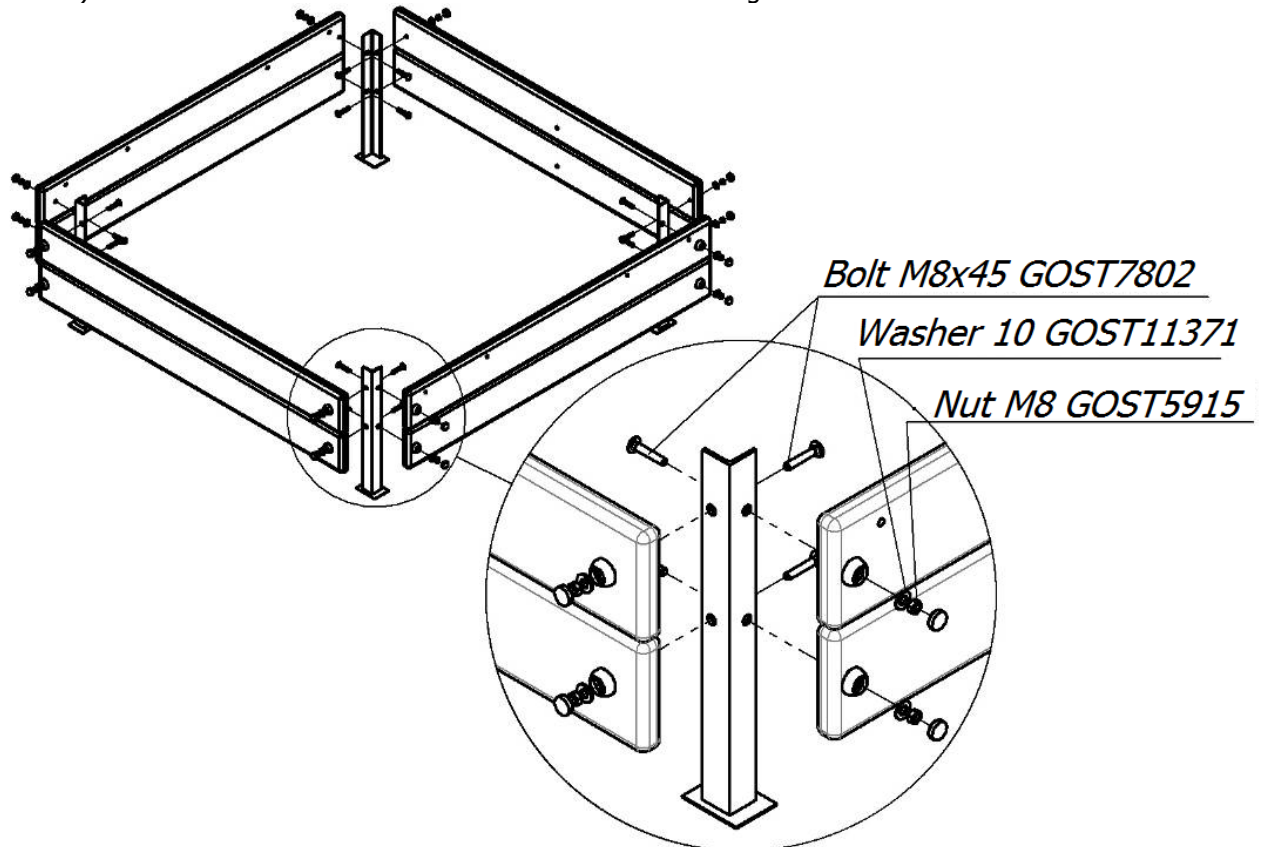




Picture 2

- 2) Attach the top boards to the frame as shown in the drawing.


Top

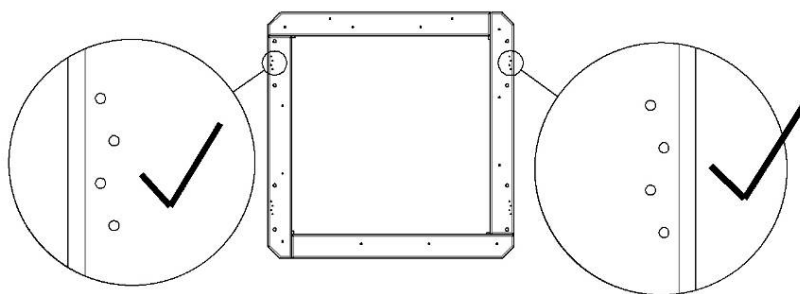

Top

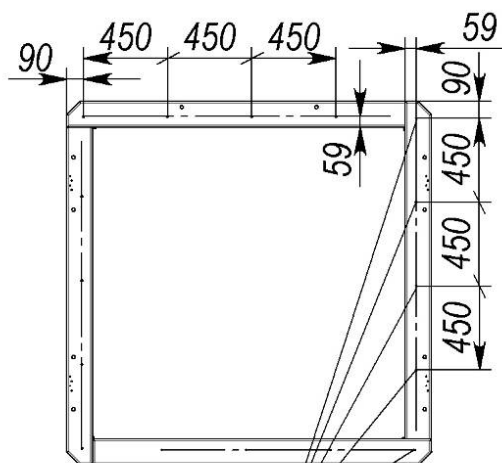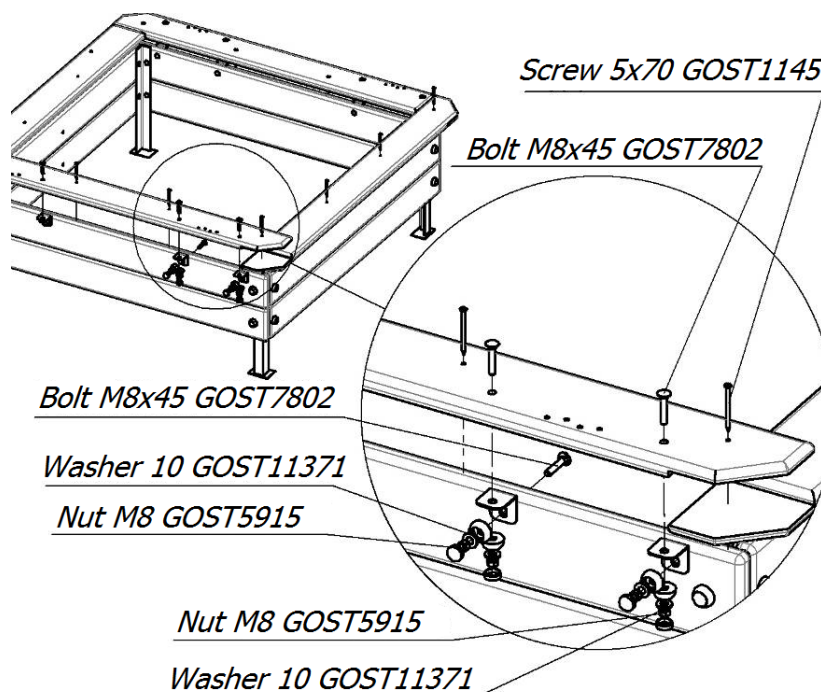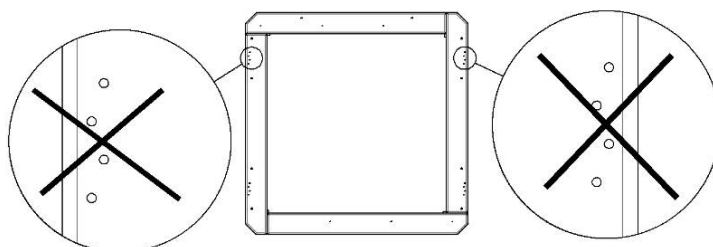


Screw 5x70 GOST1145

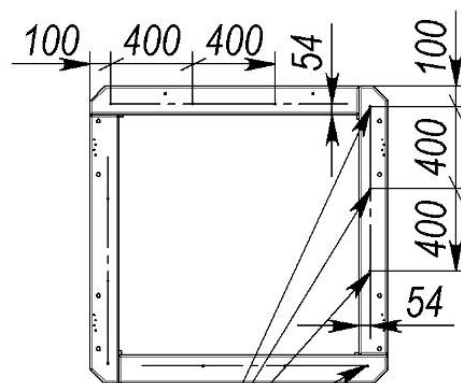

Screw 5x70 GOST1145


Picture 3


3) Attach the table - 'head' - as shown in the drawing.

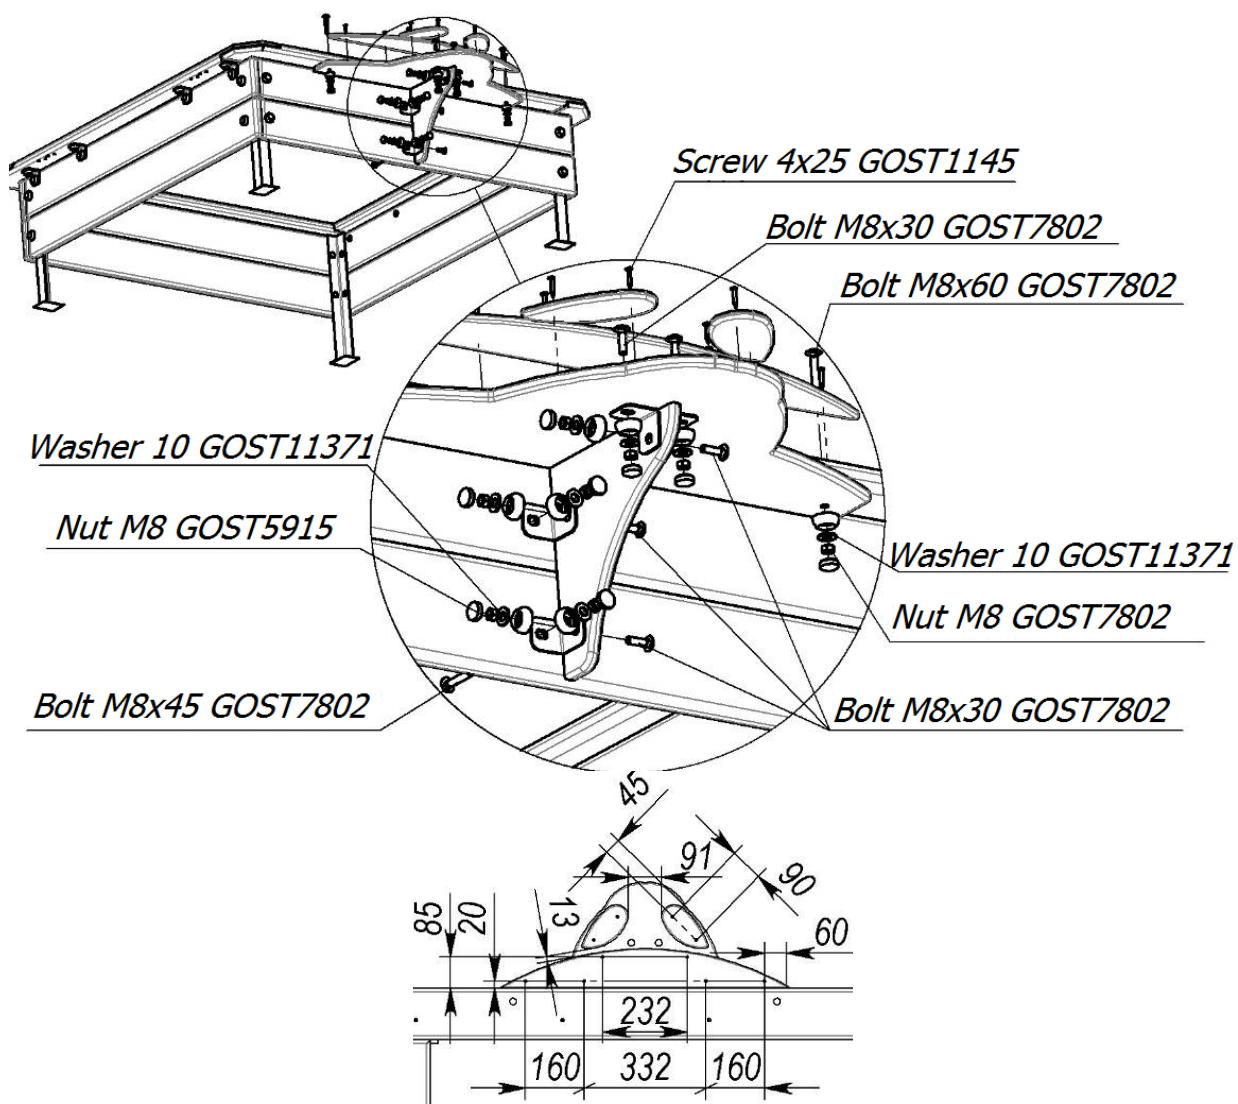

Picture 4

4) Attach the hinged covers as shown in the picture.

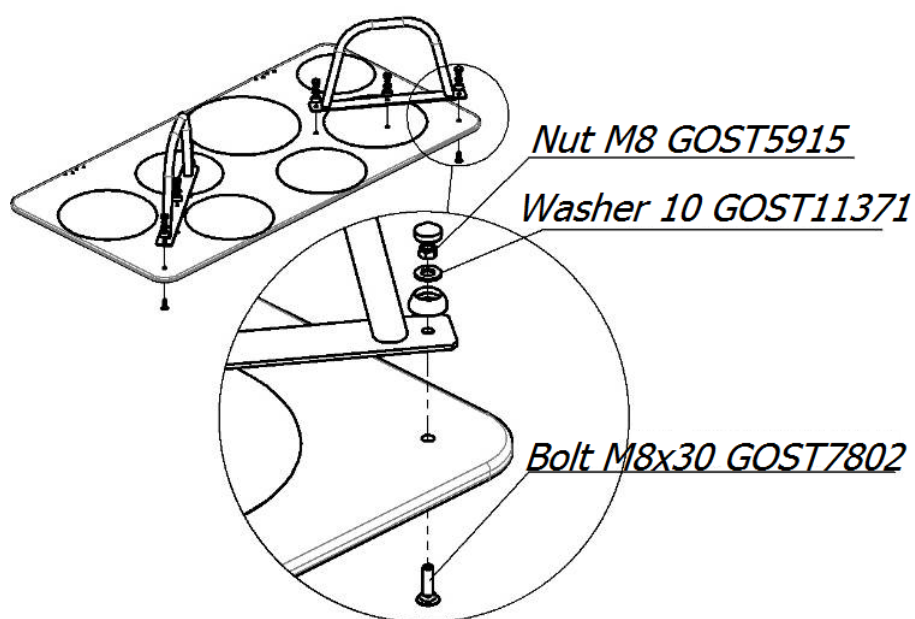

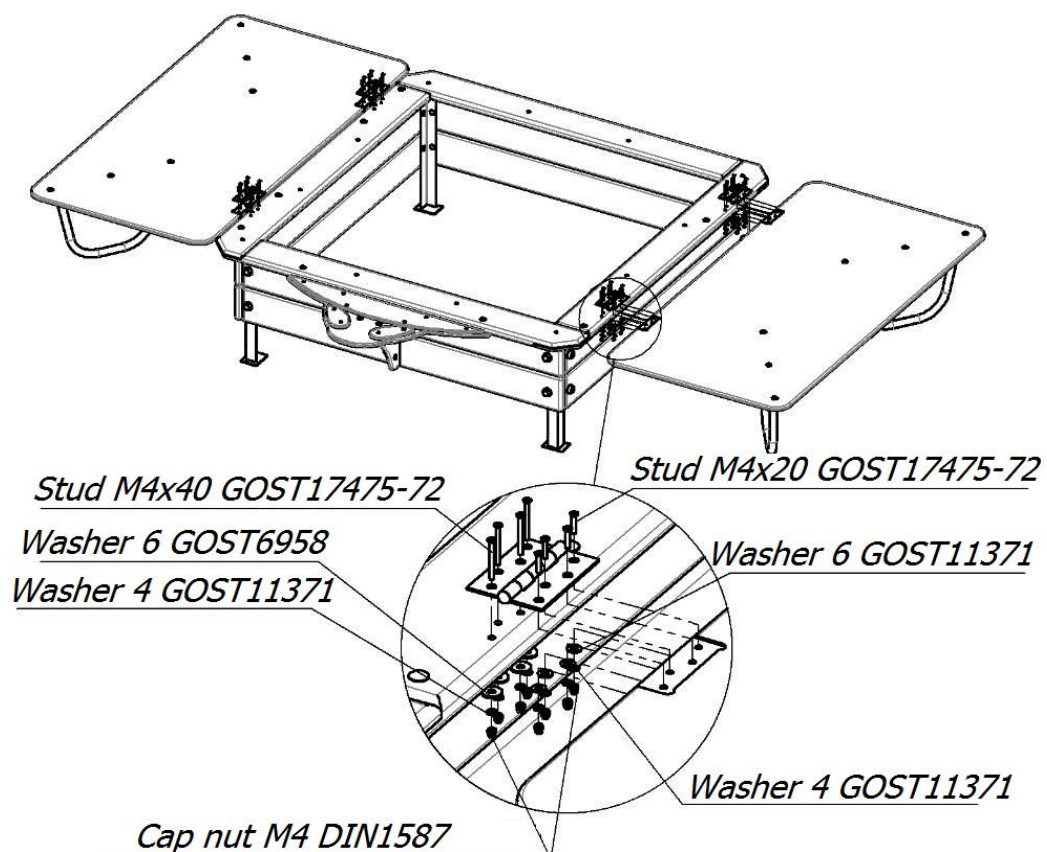


Picture 5


- 5) Mark out the area as shown in the picture of the foundation layout with racks. The surface should be levelled beforehand to ensure it is horizontal.

Picture 6

- 6) Install the product as shown in picture 7. The level of the playing surface 'B' coincides with the plane of the product.

Installation scheme in the soil

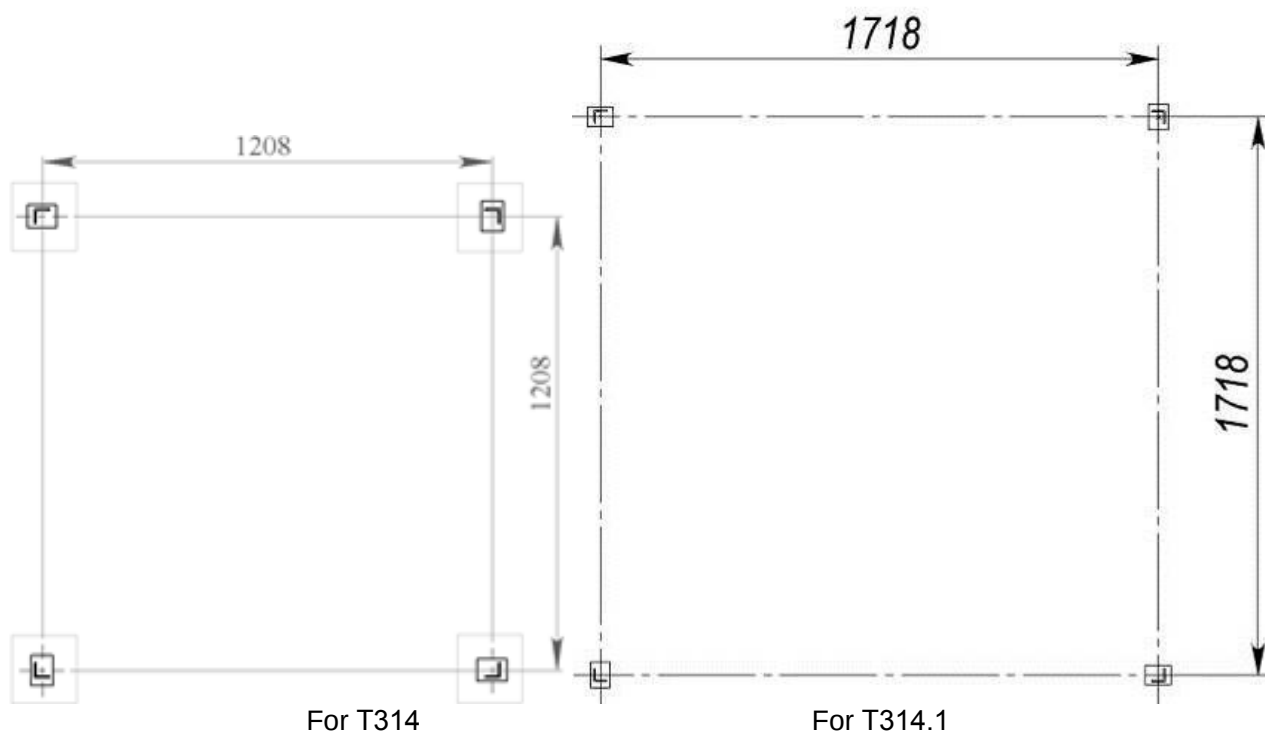


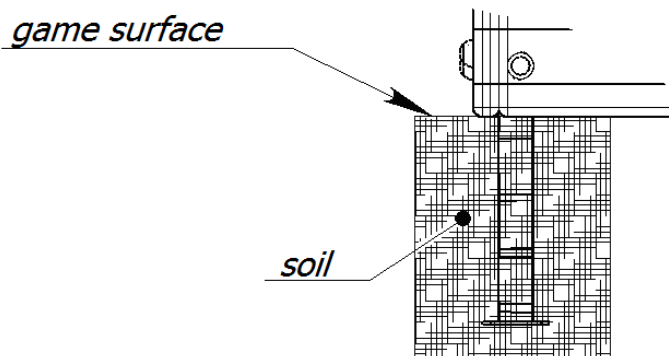


Picture 7

5. PRODUCT INSTALLATION SCHEME

The safety zone of the installed product must comply with the picture 8.

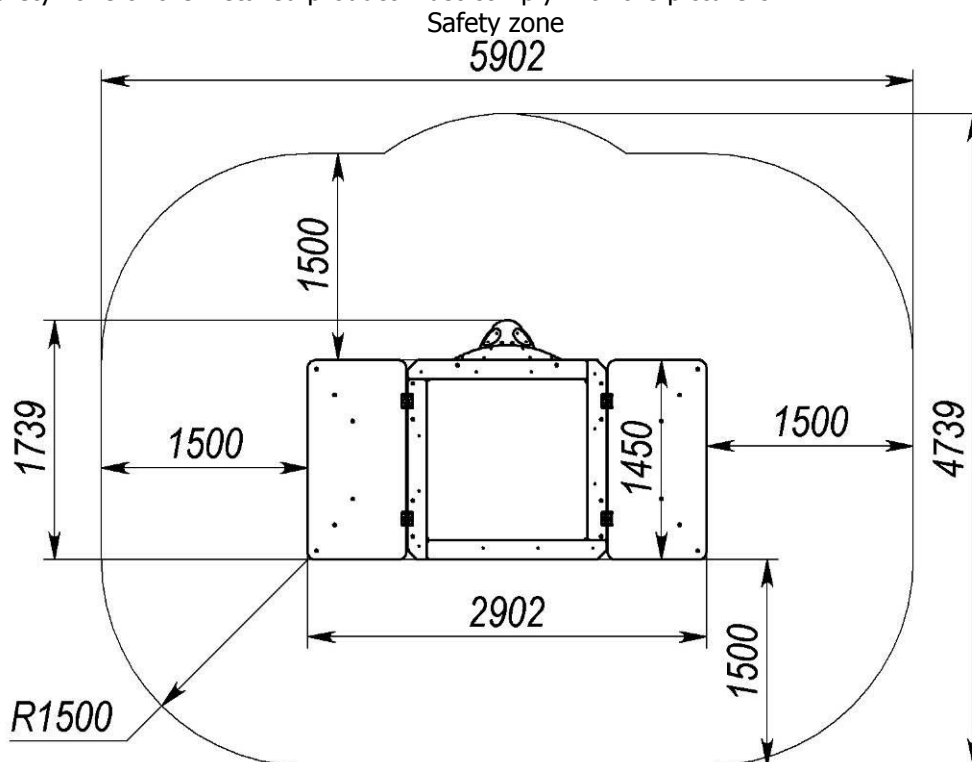

For T314

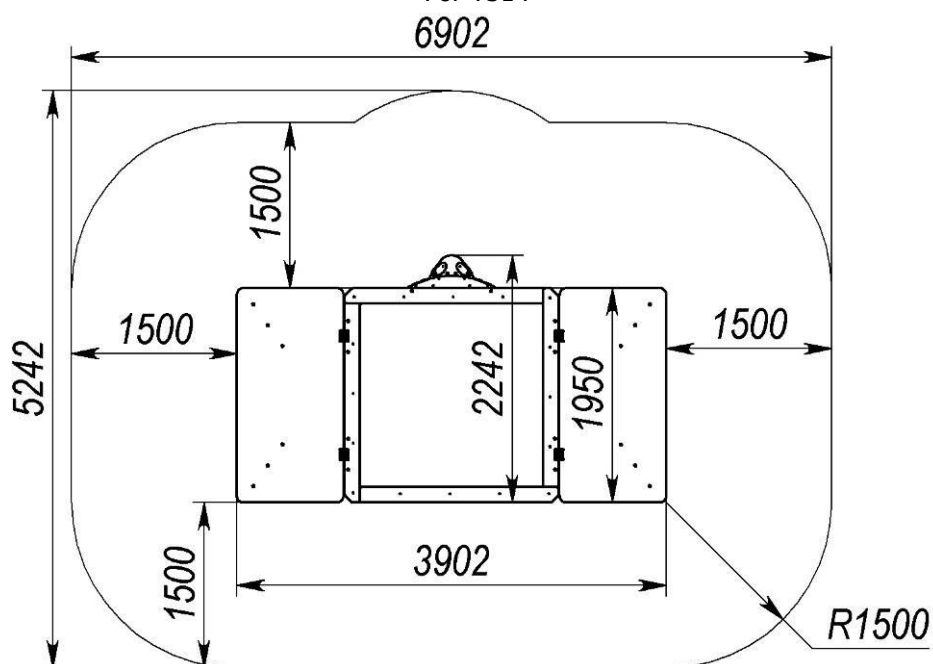

For T314.1

Picture 8

6. INFORMATION ON STORAGE, TRANSPORT AND DISPOSAL

The product is transported in the manufacturer's packaging by any means of transport that ensures its safety and protection from external factors (rain, snow, sunlight, water, high humidity, etc.).

Information about transportation

Date		Brand, state number of the ca/trailer	Position, full name	Signature
Departure	Arrival			

Before installation, store the product in the original packaging in dry, closed rooms with natural air ventilation.

If it is necessary to transport the product to another location after use, it is recommended to use the manufacturer's packaging.

If long-term storage of the product is required, the following storage rules must be observed (the list of conditions is not complete):

- place the product in a closed dry room with natural ventilation;
 - protect the product from external factors (dust, water drops, etc.) with a large plastic bag, leaving space for free air circulation;
 - take other measures to preserve the appearance and characteristics of the product during storage.
- When removing the product from storage and preparing for installation, follow the next recommendations:
- remove the product from the packaging material (polyethylene, cardboard, other packaging materials);
 - remove dust and other contaminants from the surface of the product;
 - check completeness and absence of parts damage.

Storage information

Date		Product storage conditions	Full name	Signature
Putting into storage	Removal from storage			

After the end of the equipment's service life, the buyer independently determines the procedure for its use. If you decide to recycle, contact the seller or specialized organizations.

The equipment does not contain harmful impurities and materials that can harm your health and is not subject to special recycling.

7. PRODUCT USE

Do not use the product until it has been fully and completely installed.

The product must not be used by users of a different age category.

The product must not be used by users of a different weight category.

Before using the product, clear the safety area of any unnecessary objects that may cause damage to the user (debris, tools left over from assembly and installation, etc.).

Do not use the product in adverse weather conditions (ice, snow, rain, hail, strong winds, etc.), which may cause injury to the user.

8. PRODUCT MAINTENANCE

You have purchased high-quality and reliable equipment. In the process of its production, the requirements of regulatory and technical documents of Ukraine, the CIS countries and the European Union regulating the production of children's gaming equipment were taken into account. However, it should not be forgotten that when operating any technical product, certain rules and requirements must be followed. Despite the fact that our product is of high quality and reliability, this rule applies to it in full. You should be aware that the implementation of the following rules and recommendations for product maintenance is aimed at ensuring that your child, the child of your friends or acquaintances is safe and no unforeseen factors threaten his health, life.

Remember that the operation of the product is accompanied by the influence of various negative factors on it, a complete list of which cannot be predicted. Among them, an important place is occupied by natural factors and factors caused by human influence on equipment. As a rule, their action initially leads to disruptions in the appearance of the product. Thus, under the influence of factors caused by the exploitation of a person, there may be damage to the integrity of the paint coating of parts made of wood, in the form of scuffs, chips, incisions, and when exposed to parts made of metal, damage to the paint coating in the form of nicks, chips, abrasion, etc. This leads to the emergence and development of defects that can be the cause of the destruction of the product. The product is particularly dangerous if it is used for other than its intended purpose, if the permissible loads are exceeded, or if vandalism occurs, as these factors can cause irreversible changes in the structure of the material from which the product is made, leading to destruction.

The maintenance of the product implies, first of all, the responsibility of the user to comply with all recommendations provided in this document, starting with a daily inspection of the external condition of the product before operation.

Daily inspection of the product is a very important procedure. With its help, you can timely detect any changes in the appearance of the product (deformation of individual parts, deformation of the structure as a whole or part of it, damage to parts, cracks of welds, as well as the absence of fastening of parts of the product, etc.).

Before using the product, check its operability, absence of damage, dirt on the product, sharp edges, reliability of fixing the structure, absence of unnecessary objects on the surface of the site. If the product is damaged, fully or partially inoperable, or has any other defects, do not use it.


During operation it is also necessary to inspect the condition of the product periodically - the current inspection. It includes an external inspection of the product, checking its operability (in the presence of moving elements - the smoothness of the movement of mechanisms, compliance with operating modes, etc.). Current inspection allows you to detect malfunctions caused by the operation of equipment, climatic conditions, acts of vandalism and other factors, until they reach a critical level and the destruction of the product. The current inspection is carried out in order to detect foreign objects that may threaten the user and lead to violations of the functioning of the product. The frequency of the current inspection is set by the owner taking into account the operating conditions. If you do not have sufficient technical knowledge and skills to conduct such inspections, we recommend you to contact the authorized specialists of the manufacturer in order to obtain advice.


Every three months, a scheduled inspection should be carried out, which primarily concerns the foundation part, load-bearing elements and connection nodes of elements (their integrity and degree of deterioration).

The main annual inspection must be carried out annually by authorised specialists of the manufacturer. During the inspection, the technical condition of the equipment shall be assessed for compliance with safety requirements. The degree of deterioration and damage to wooden elements and their ability to withstand the applied loads, damage, corrosion of metal elements and the impact of these factors on the safety of the product are determined. The inspection also helps to identify the impact of repairs, if any, on the safety of the equipment.

Based on the results of the inspection, a maintenance procedure is carried out to eliminate the identified discrepancies in the product's operation. This procedure includes assessing the condition of parts and assemblies, replacing worn parts, and restoring the integrity of protective coatings. The results of the inspections, as well as the procedures carried out as a result of the inspection and maintenance of the product must be properly documented in the Registration Journal, which is an integral part of this passport. The owner of the product must keep the acts of maintenance of the product, acts of repair work.


T314

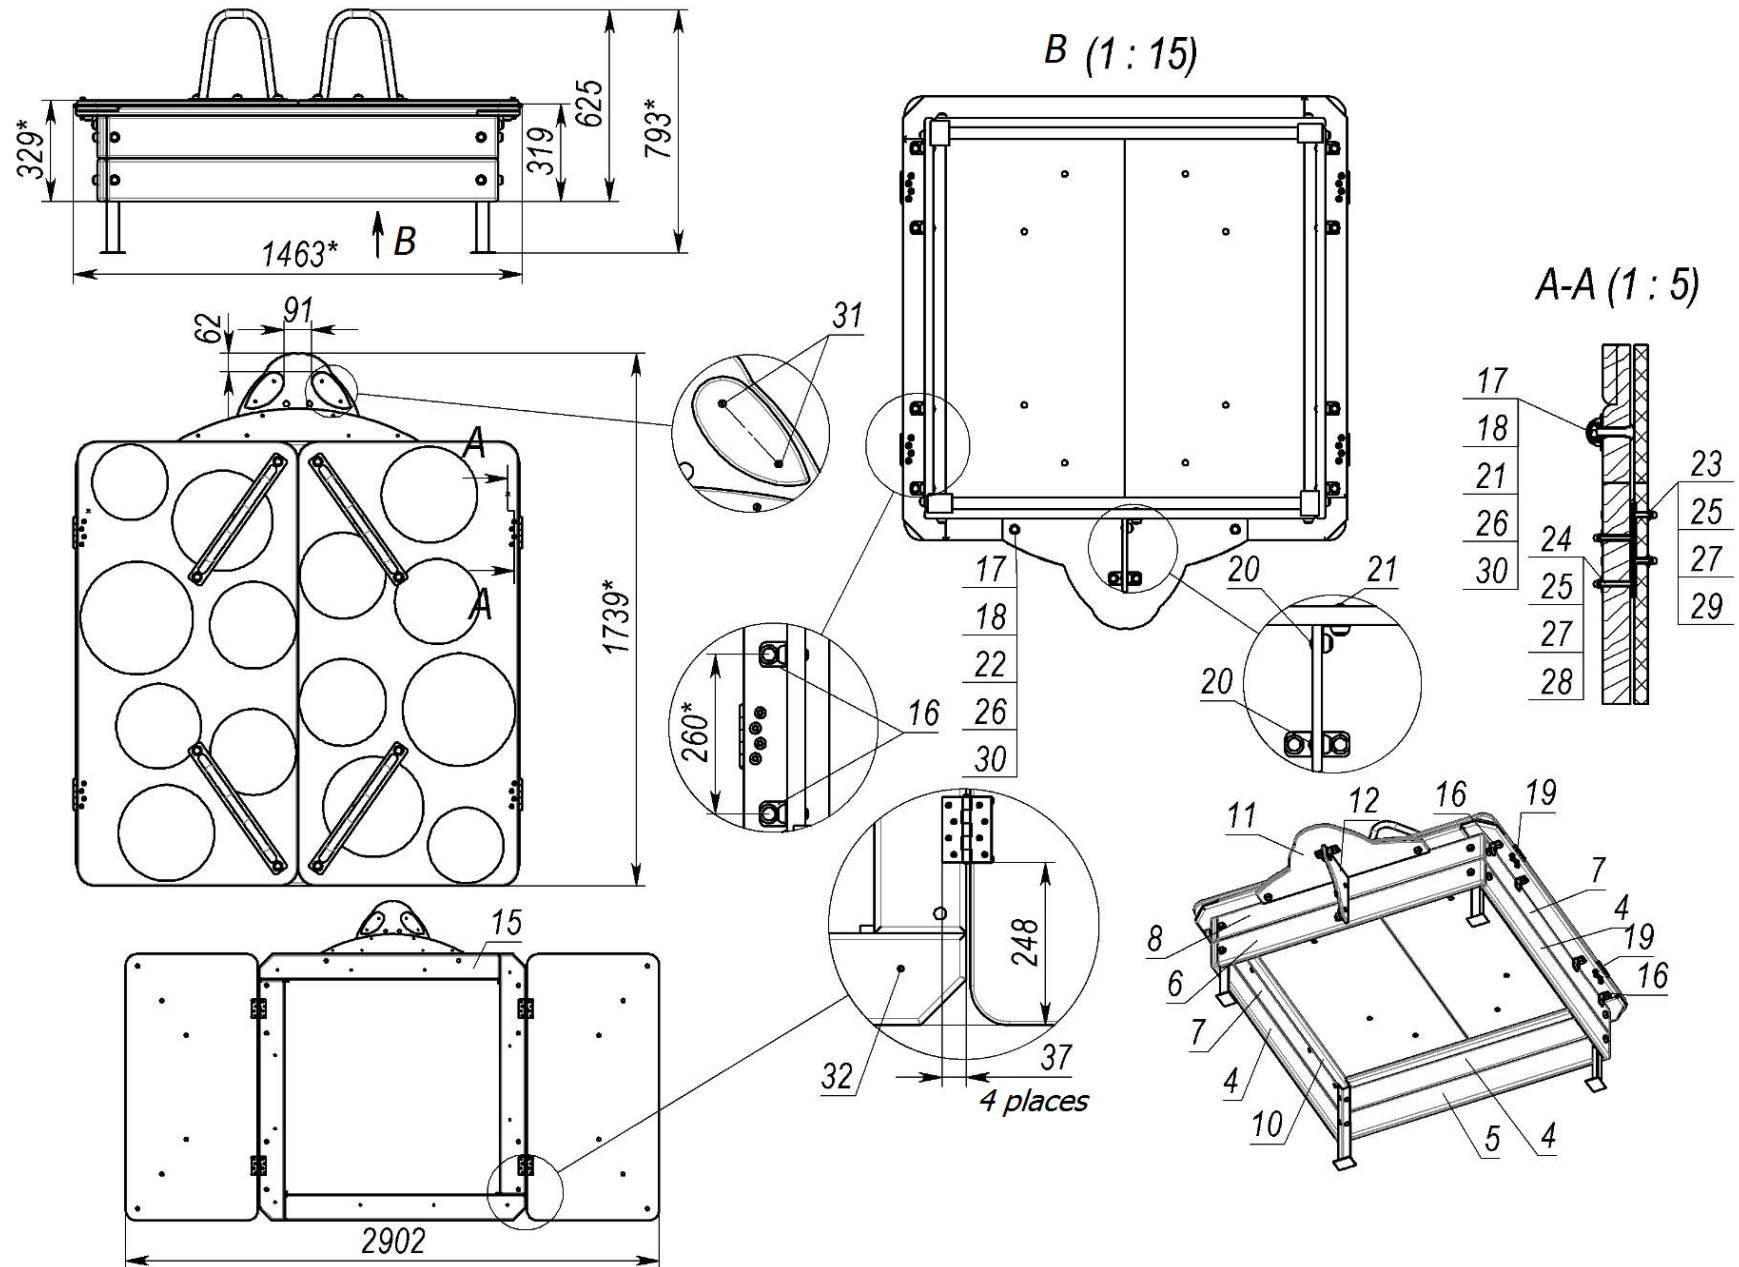


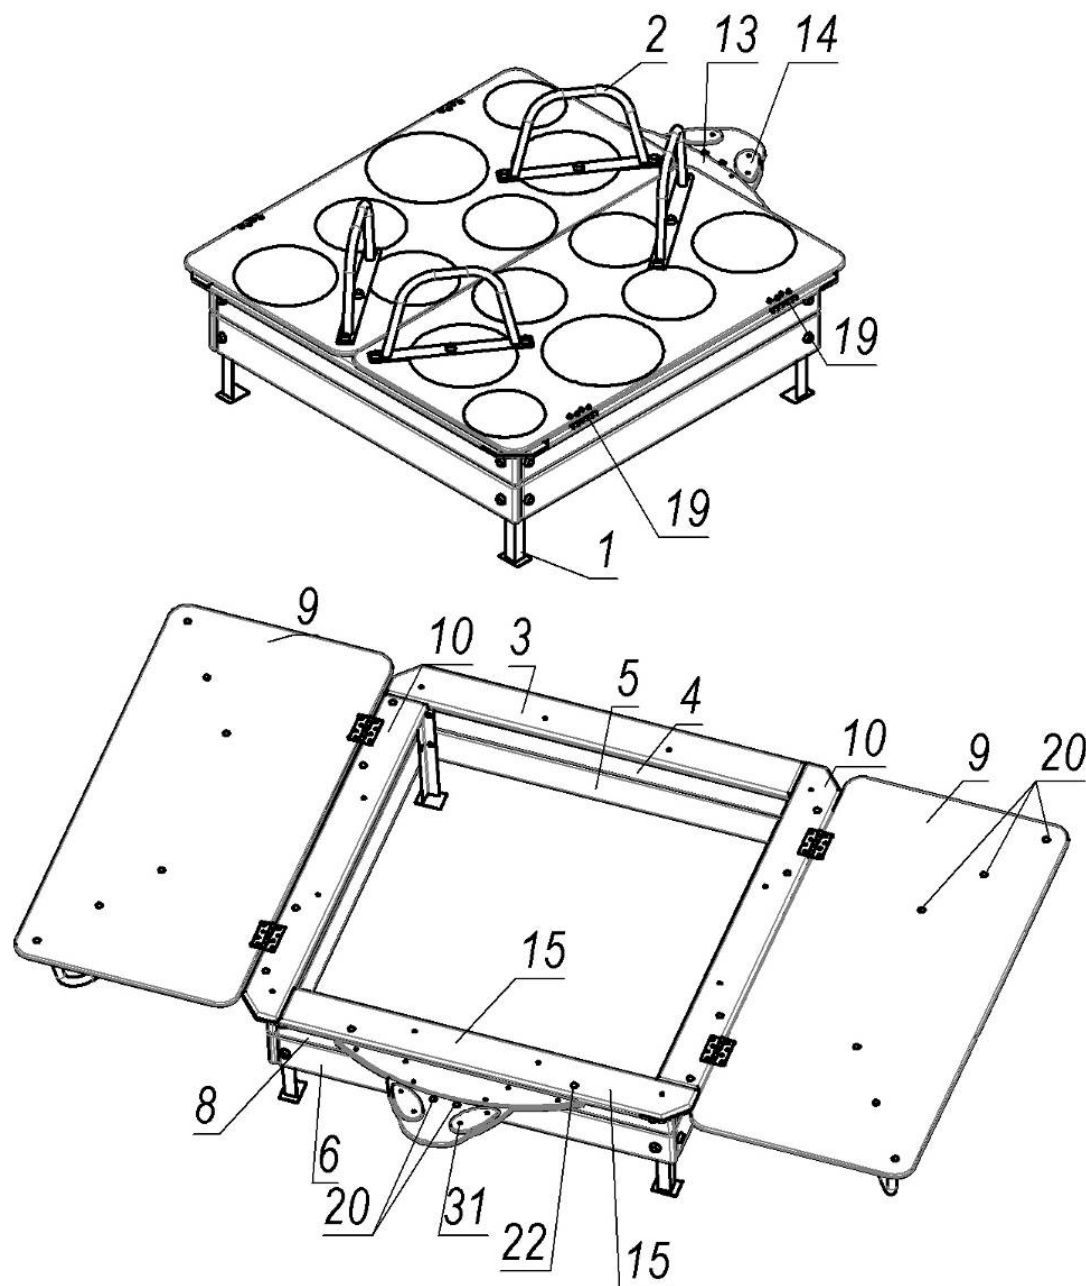

Pos.	Name	Weight, kg	Q-ty	Note
1	Foot	1	4	Blue
2	Support	2	4	Red
3	Upper board 140x30x1450mm	3	1	Red
4	Upper board 140x30x1278mm	3	3	Yellow
5	Upper board 140x30x1278mm	3	1	Blue
6	Upper board 140x30x1278mm	3	1	Blue
7	Upper board 140x30x1278mm	3	2	Blue
8	Upper board 140x30x1278mm	3	1	Yellow
9	Cover	12	2	
10	Upper board 140x30x1450mm	3	2	Red
11	Table	2	1	Black
12	Foot		1	Yellow
13	Cover plate		1	Red
14	Cover plate		2	Yellow
15	Upper board 140x30x1450mm	3	1	Red
16	Small angle bar		12	Blue
17	Cap M8		53	
18	Cup M8		53	
19	Universal loop 100 mm brass-coated		4	
20	Bolt M8x30 GOST7802		17	
21	Bolt M8x45 GOST7802		34	
22	Bolt M8x60 GOST7802		2	
23	Stud M4x20 GOST17475		16	
24	Stud M4x40 GOST17475		16	
25	Cap nut M4 DIN587		32	
26	Nut M8 GOST5915		53	
27	Washer 4 GOST11371		32	
28	Washer 6 GOST6958		16	
29	Washer 6 GOST11371		16	
30	Washer 10 GOST11371		53	
31	Screw 4x25 GOST1145		10	
32	Screw 5x70 GOST1145		12	

T314.1

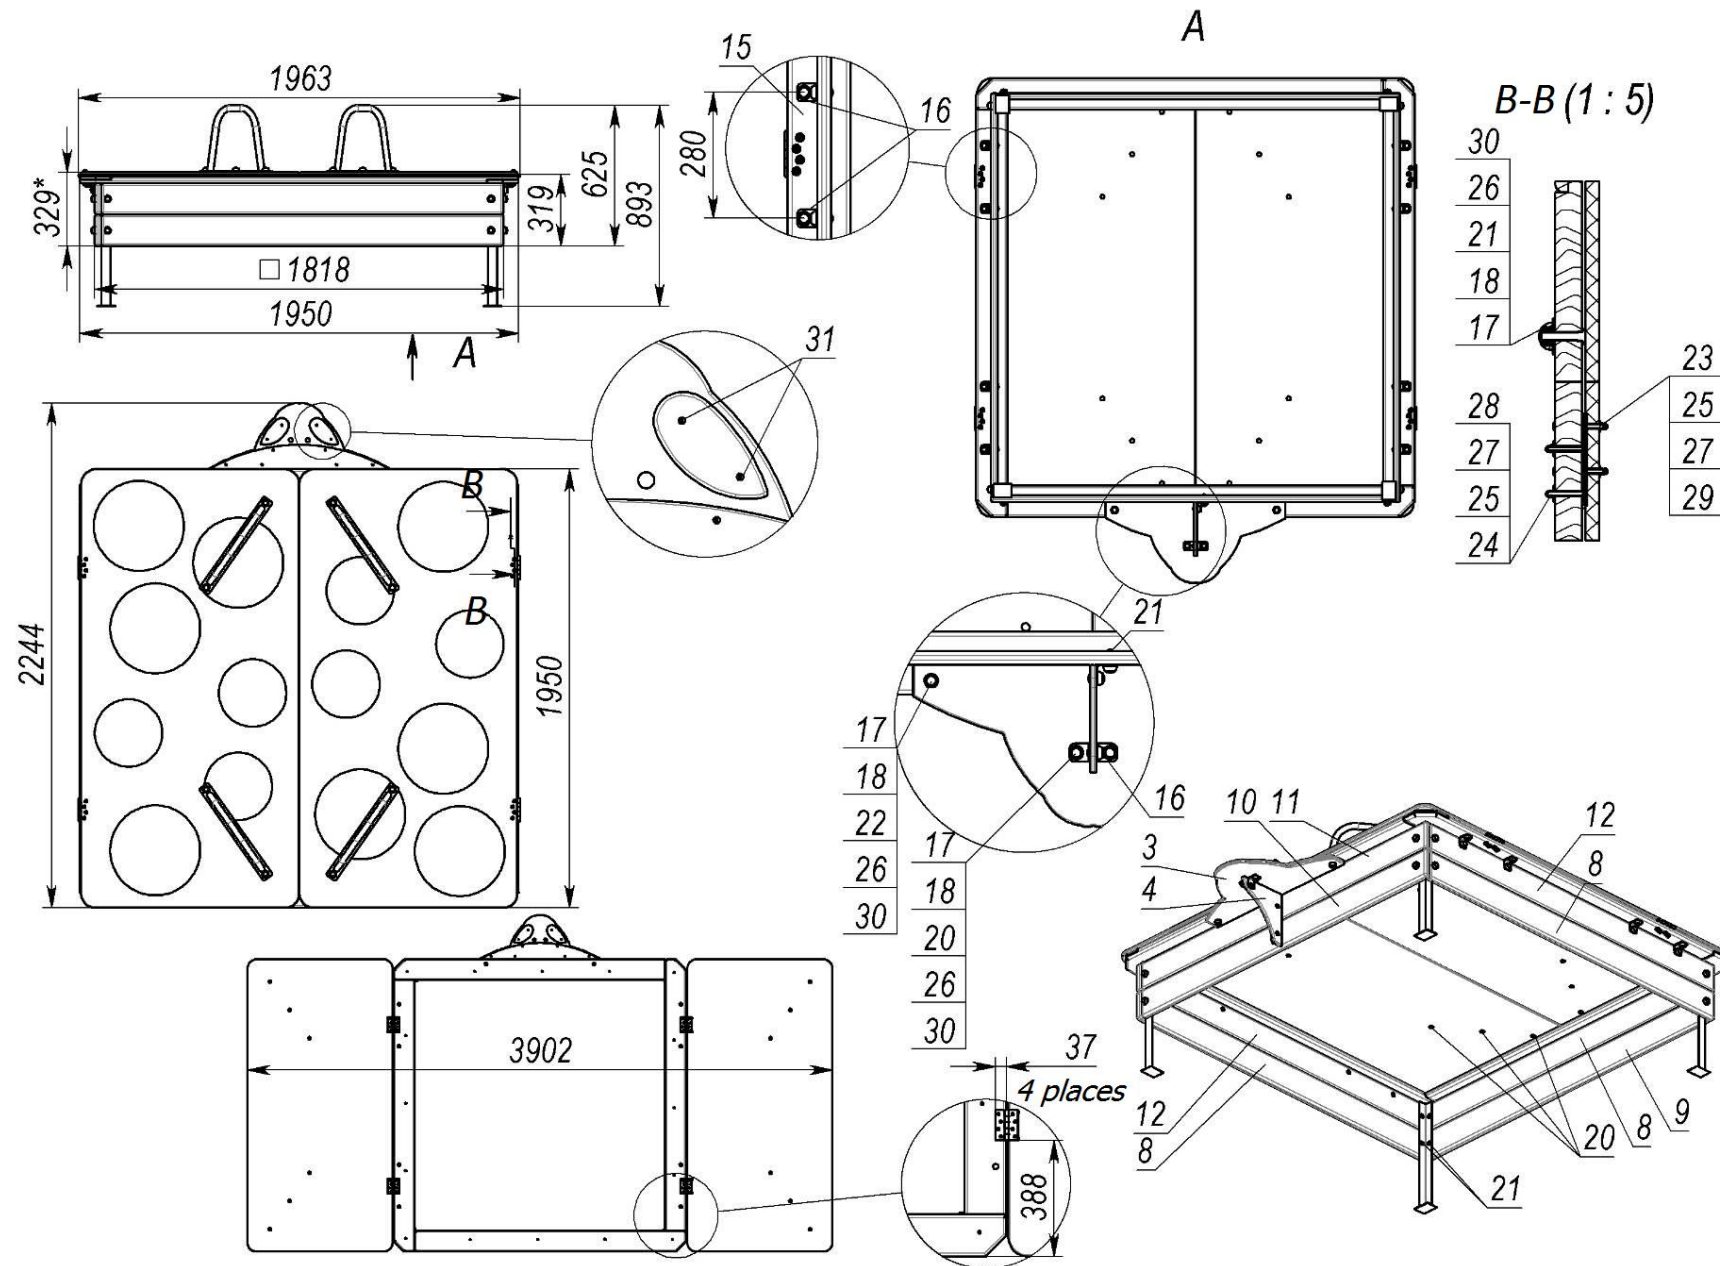

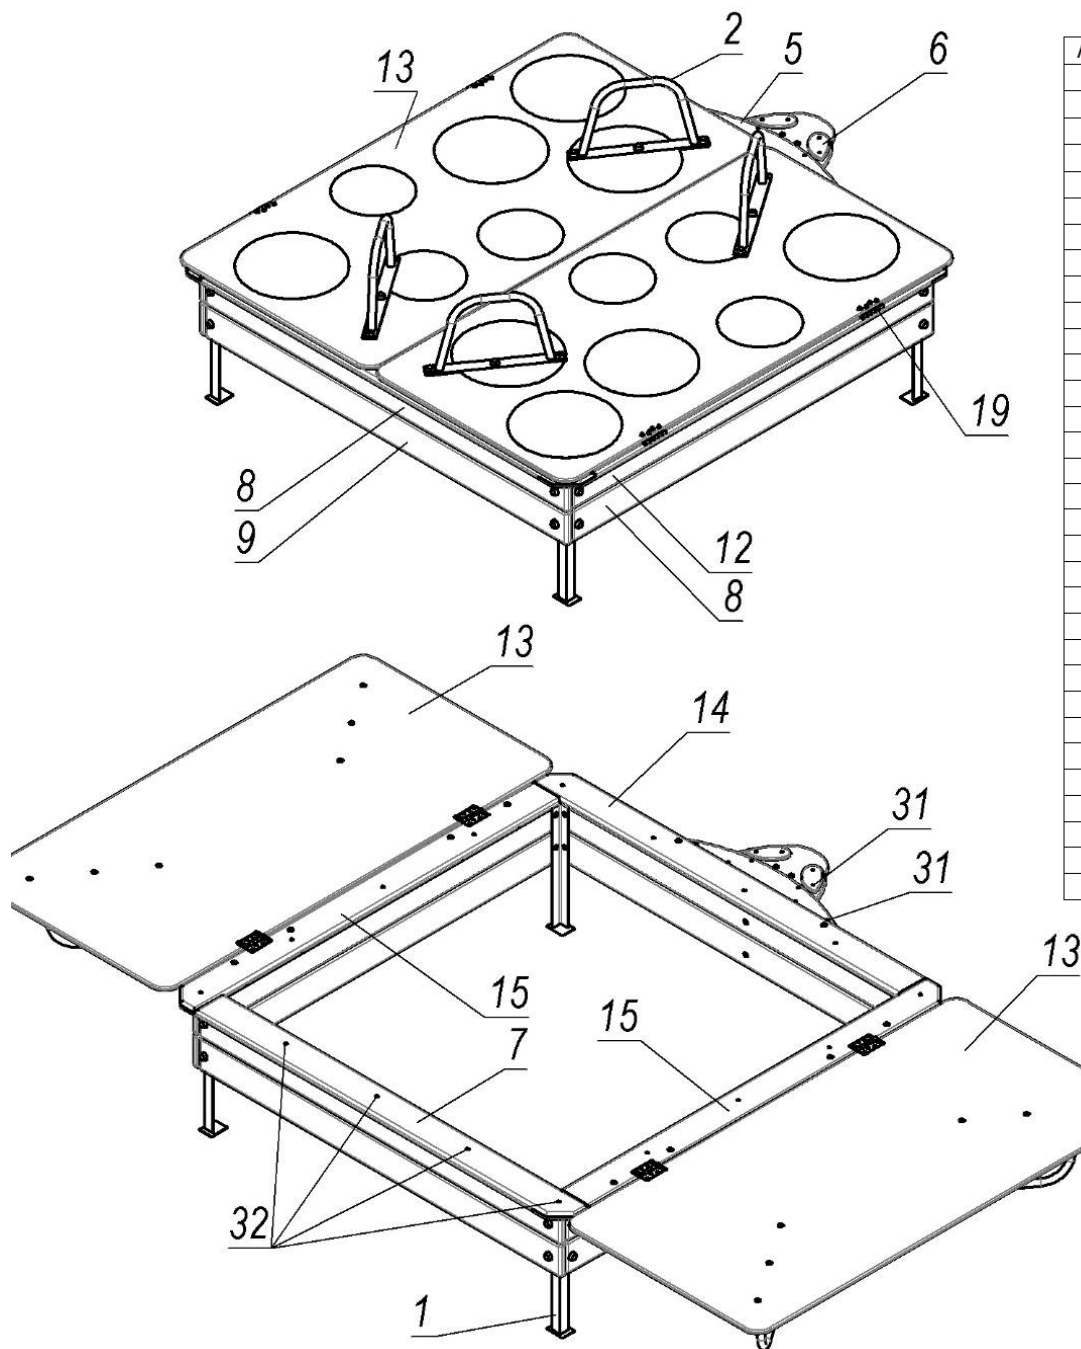

Pos.	Name	Weight, kg	Q-ty	Note
1	Foot	1	4	Blue
2	Support	2	4	Red
3	Table	2	1	Black
4	Foot		1	Yellow
5	Cover plate		1	Red
6	Cover plate		2	Yellow
7	Upper board 140x30x1950mm	4	1	Red
8	Upper board 140x30x1788mm	4	3	Yellow
9	Upper board 140x30x1788mm	4	1	Blue
10	Upper board 140x30x1788mm	4	1	Blue
11	Upper board 140x30x1788mm	4	1	Yellow
12	Upper board 140x30x1788mm	4	2	Blue
13	Cover	22	2	
14	Upper board	4	1	Red
15	Upper board	4	2	Red
16	Small angle bar		12	Blue
17	Cap M8		53	
18	Cup M8		53	
19	Universal loop 100 mm brass-coated		4	
20	Bolt M8x30 GOST7802		17	
21	Bolt M8x45 GOST7802		34	
22	Bolt M8x60 GOST7802		2	
23	Stud M4x20 GOST17475		16	
24	Stud M4x40 GOST17475		16	
25	Cap nut M4 DIN587		32	
26	Nut M8 GOST5915		53	
27	Washer 4 GOST11371		32	
28	Washer 6 GOST6958		16	
29	Washer 6 GOST11371		16	
30	Washer 10 GOST11371		53	
31	Screw 4x25 GOST1145		10	
32	Screw 5x70 GOST1145		16	