

interatletika™

PRODUCTION AND SALE OF SPORTS GOODS


Customer support:

+38 095 273 81 53

play.interatletika.com

DATA SHEET

Sandboxes **TE331, TE331.1, TE332, TE332-3.0,**
TE333-0.6, TE333-0.9, TE334, TE334-2.7,
TE338, TE338.1, TE339

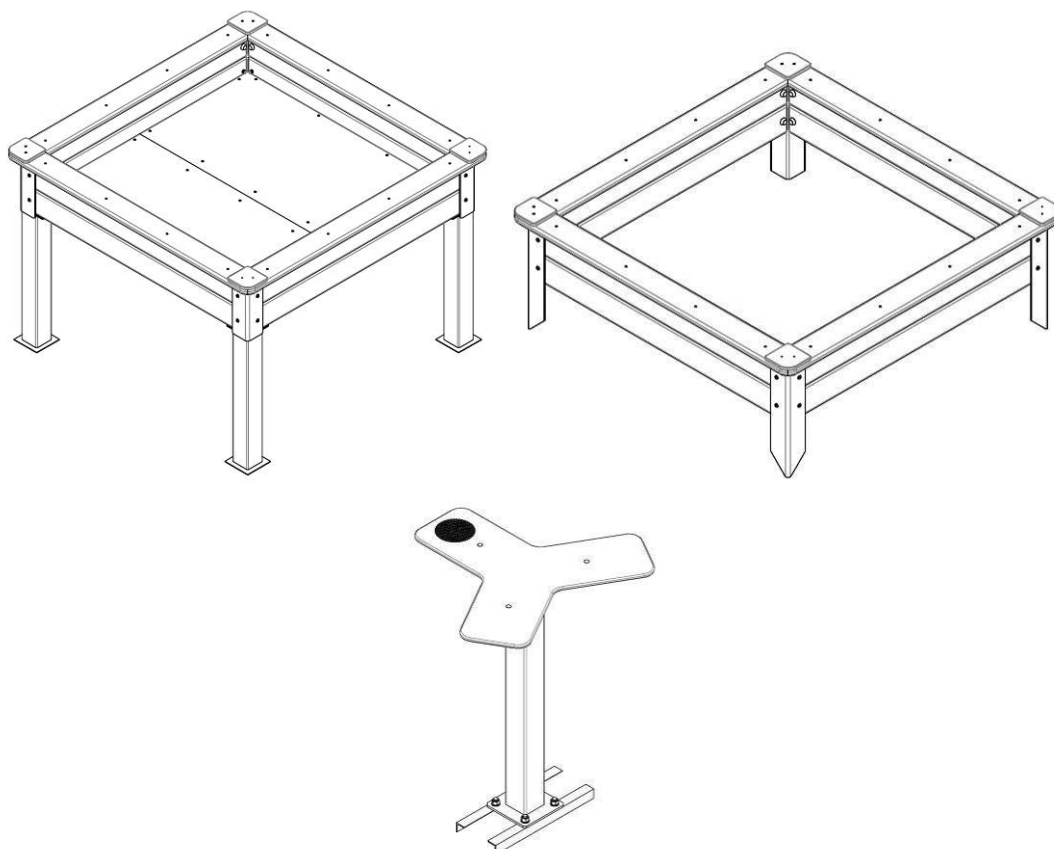








1. GENERAL INFORMATION




Purpose and content of this document. This document contains a general description of the equipment, information on installation, intended use, maintenance, current repair and manufacturer's warranty.

Distribution of this document for product modifications. The manufacturer can make changes to the design of the product, aimed at improving its characteristics, changing the design, etc. This document may not contain a description of such changes, but applies to such modified products.

2 MAIN TECHNICAL DATA AND CHARACTERISTICS

№	Code	Name	Overall dimensions, mm			Weight, kg
			Length	Width	Height	
1	TE331	Sandbox 1,5 m	1600	1600	325	62,3
2	TE332	Sandbox 2,0 m	2100	2100	325	78,5
3	TE332-3.0	Sandbox 3,0 m	3100	3100	325	115,5
4	TE333-0.6	Sandbox 1,5 m, H=0,6 m	1600	1600	622	141,3
5	TE333-0.9	Sandbox 1,5 m, H=0,9 m	1600	1600	912	155,1
6	TE334	Sandbox 1,5 m	1540	1540	329	53,4
7	TE334-2.7	Sandbox 2,7 m	2750	2750	327	97,7
8	TE331.1	Table for sandbox	873	769	507	26,4
9	TE338	Sandbox 1,5 m	1567	1567	327	58,72
10	TE338.1	Sandbox 1,5 m with a window	1567	1567	327	59
11	TE339	Pentagonal Sandbox	2414	2307	327	73,64

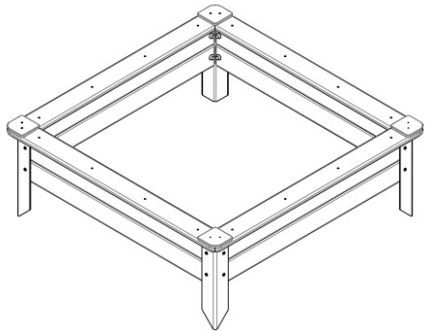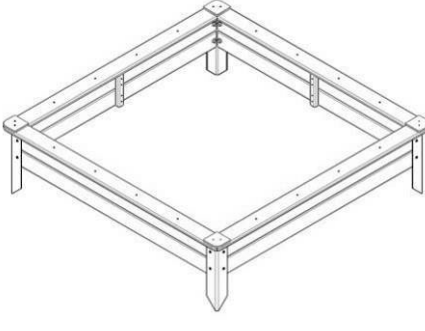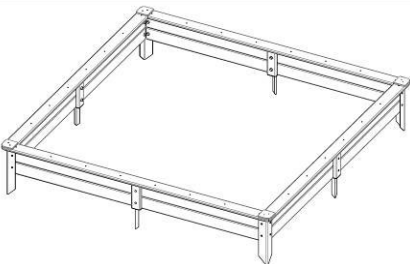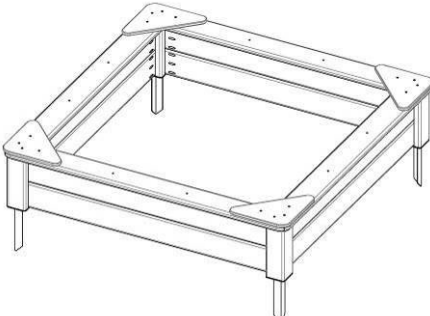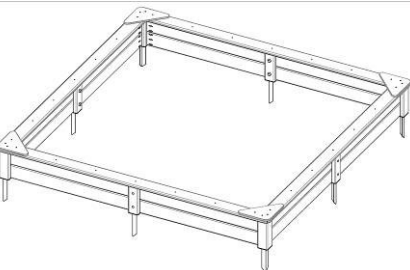Product appearance		
TE331	TE332	TE332-3.0
		
TE333-0.6		
		
TE333-0.9	TE334	TE334-2.7
		

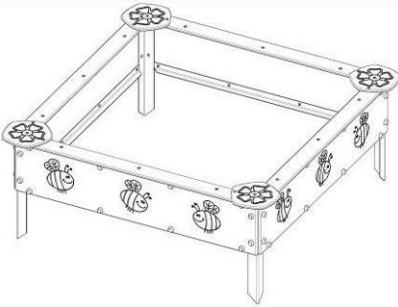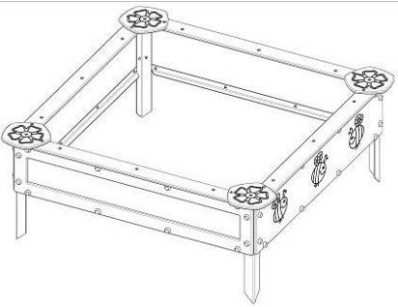
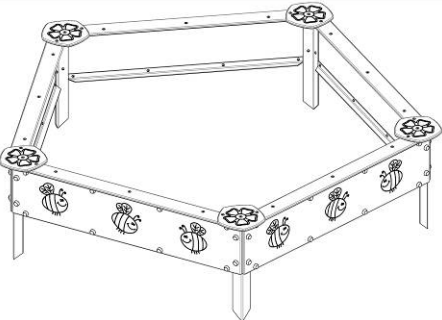
TE331.1	TE338	TE338.1
		
TE339		
		



3. COMPONENTS AND CHARACTERISTICS OF THE MAIN PARTS OF THE PRODUCT


The product is delivered disassembled. For the names of the main components of the product, see the appendix 2


4. PRODUCT ASSEMBLY AND INSTALLATION PROCEDURE



Tools and accessories. The product does not include the tools required for installation.

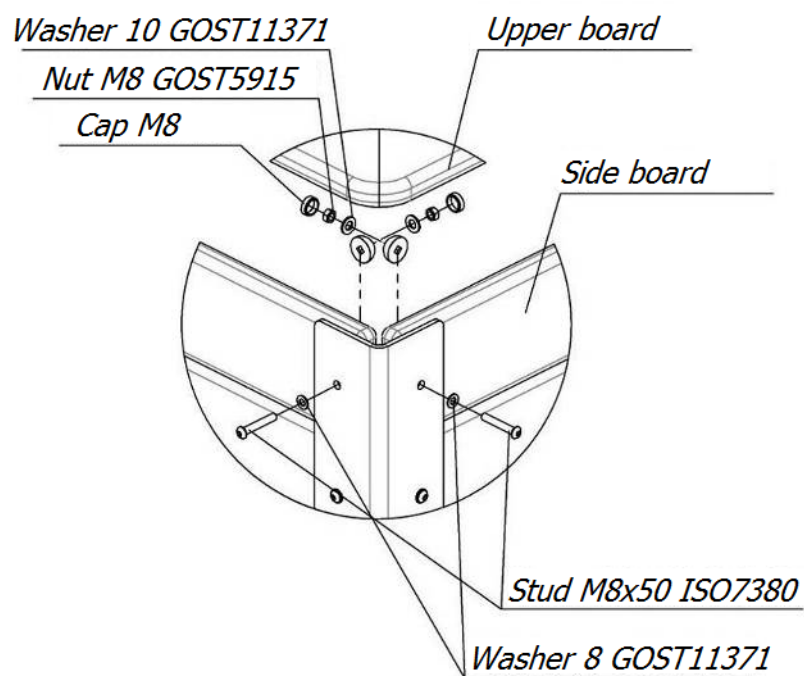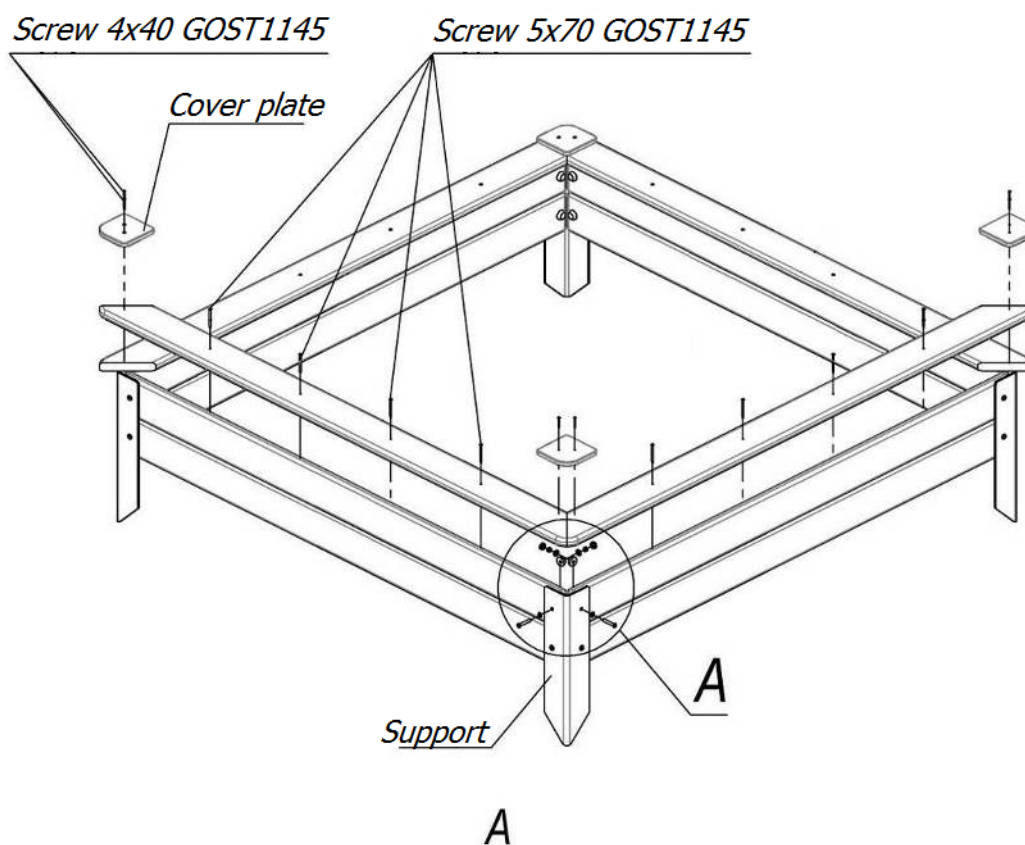


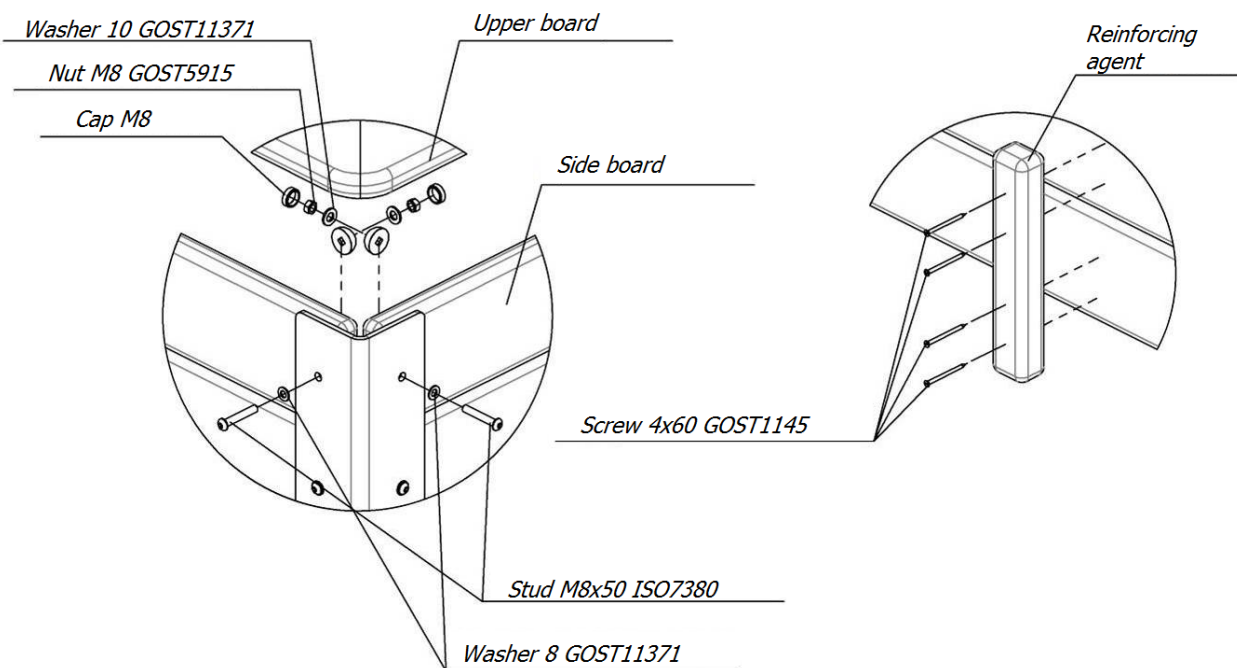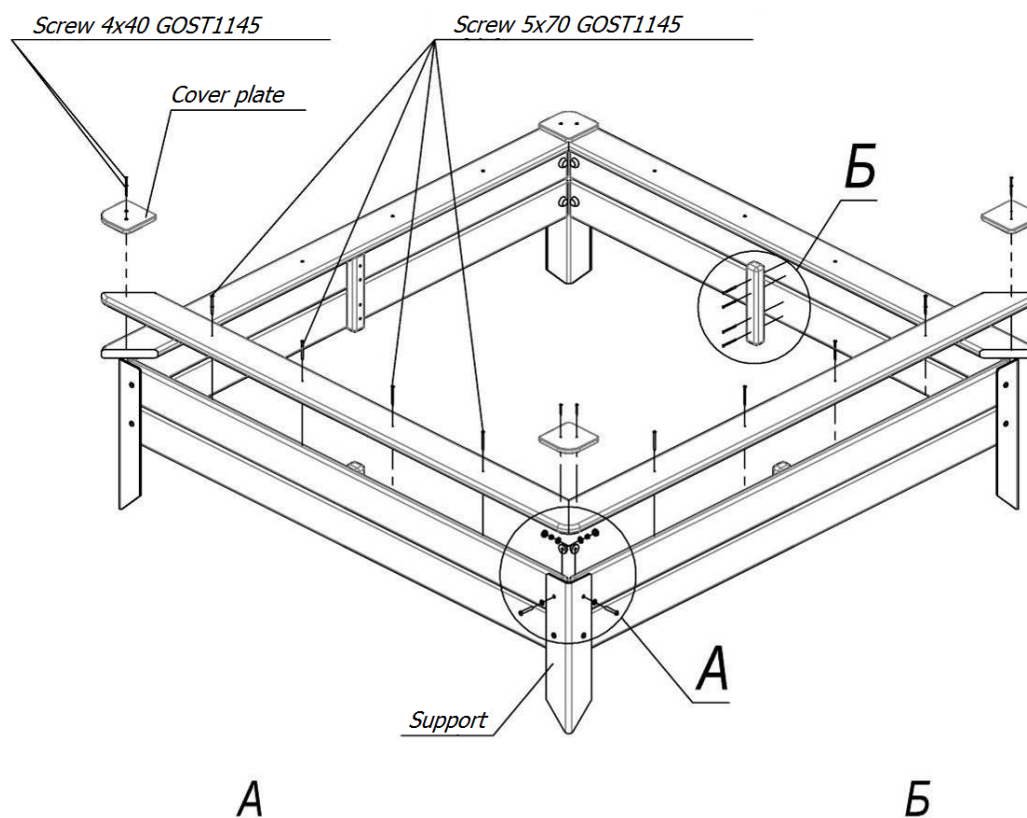

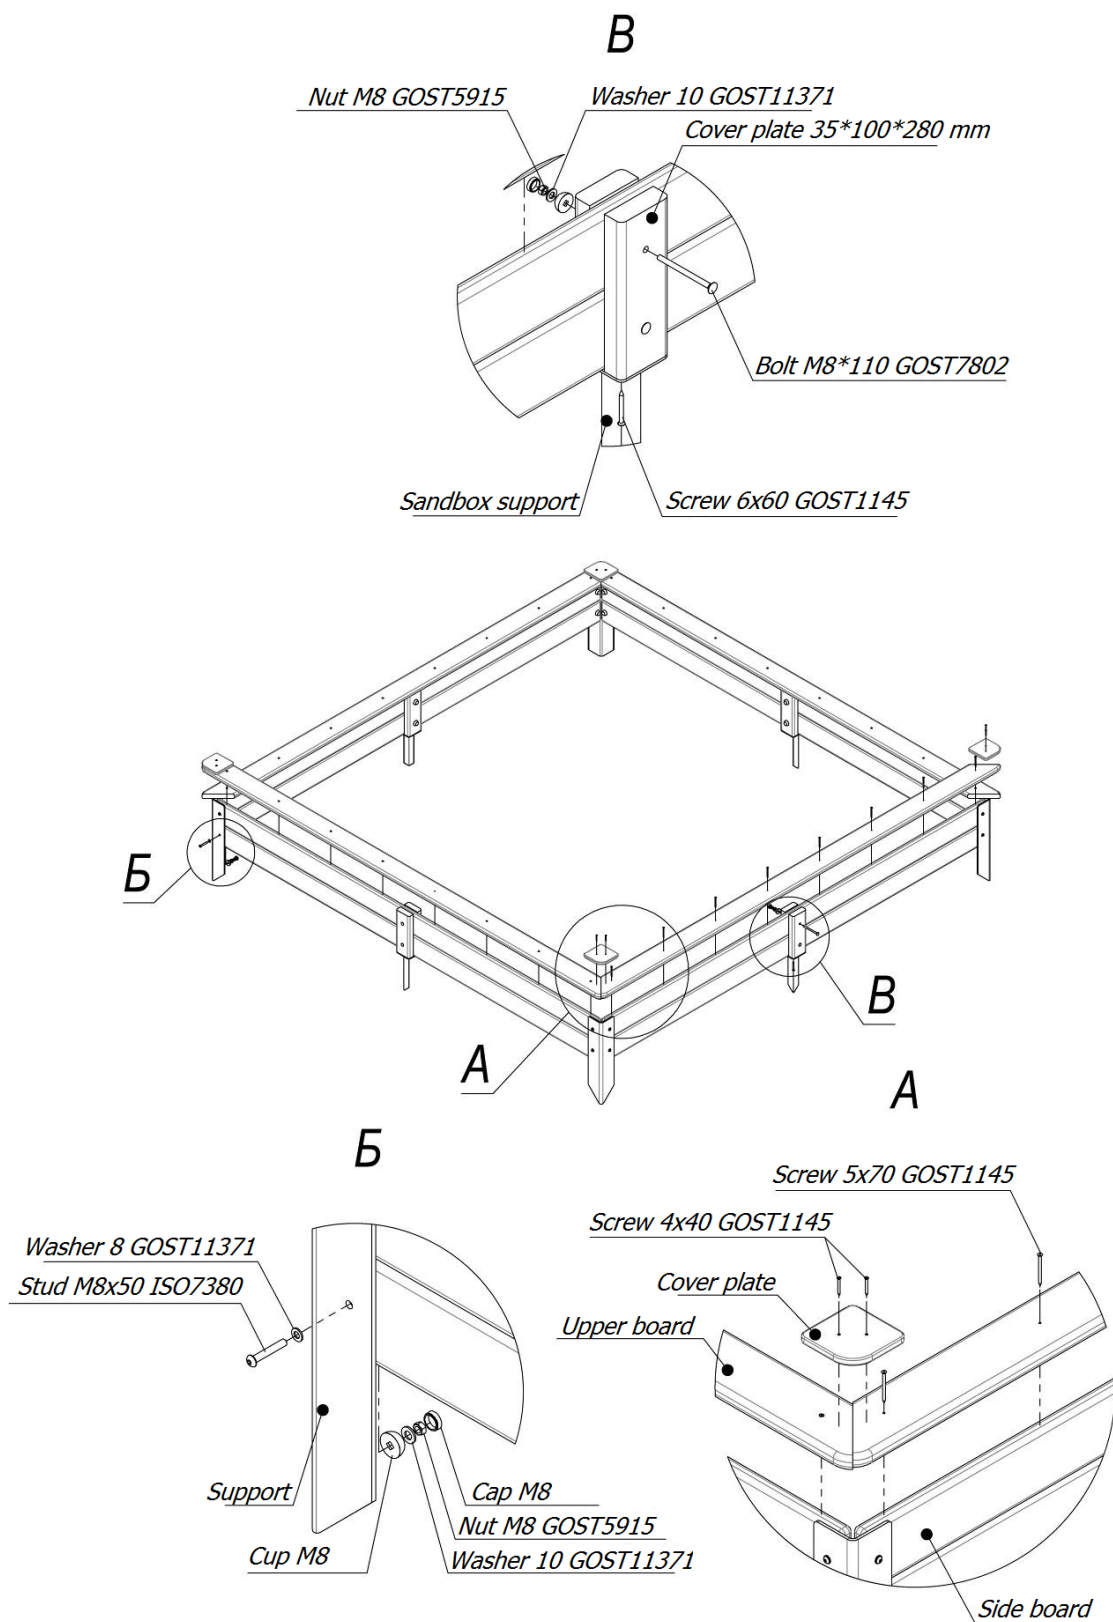


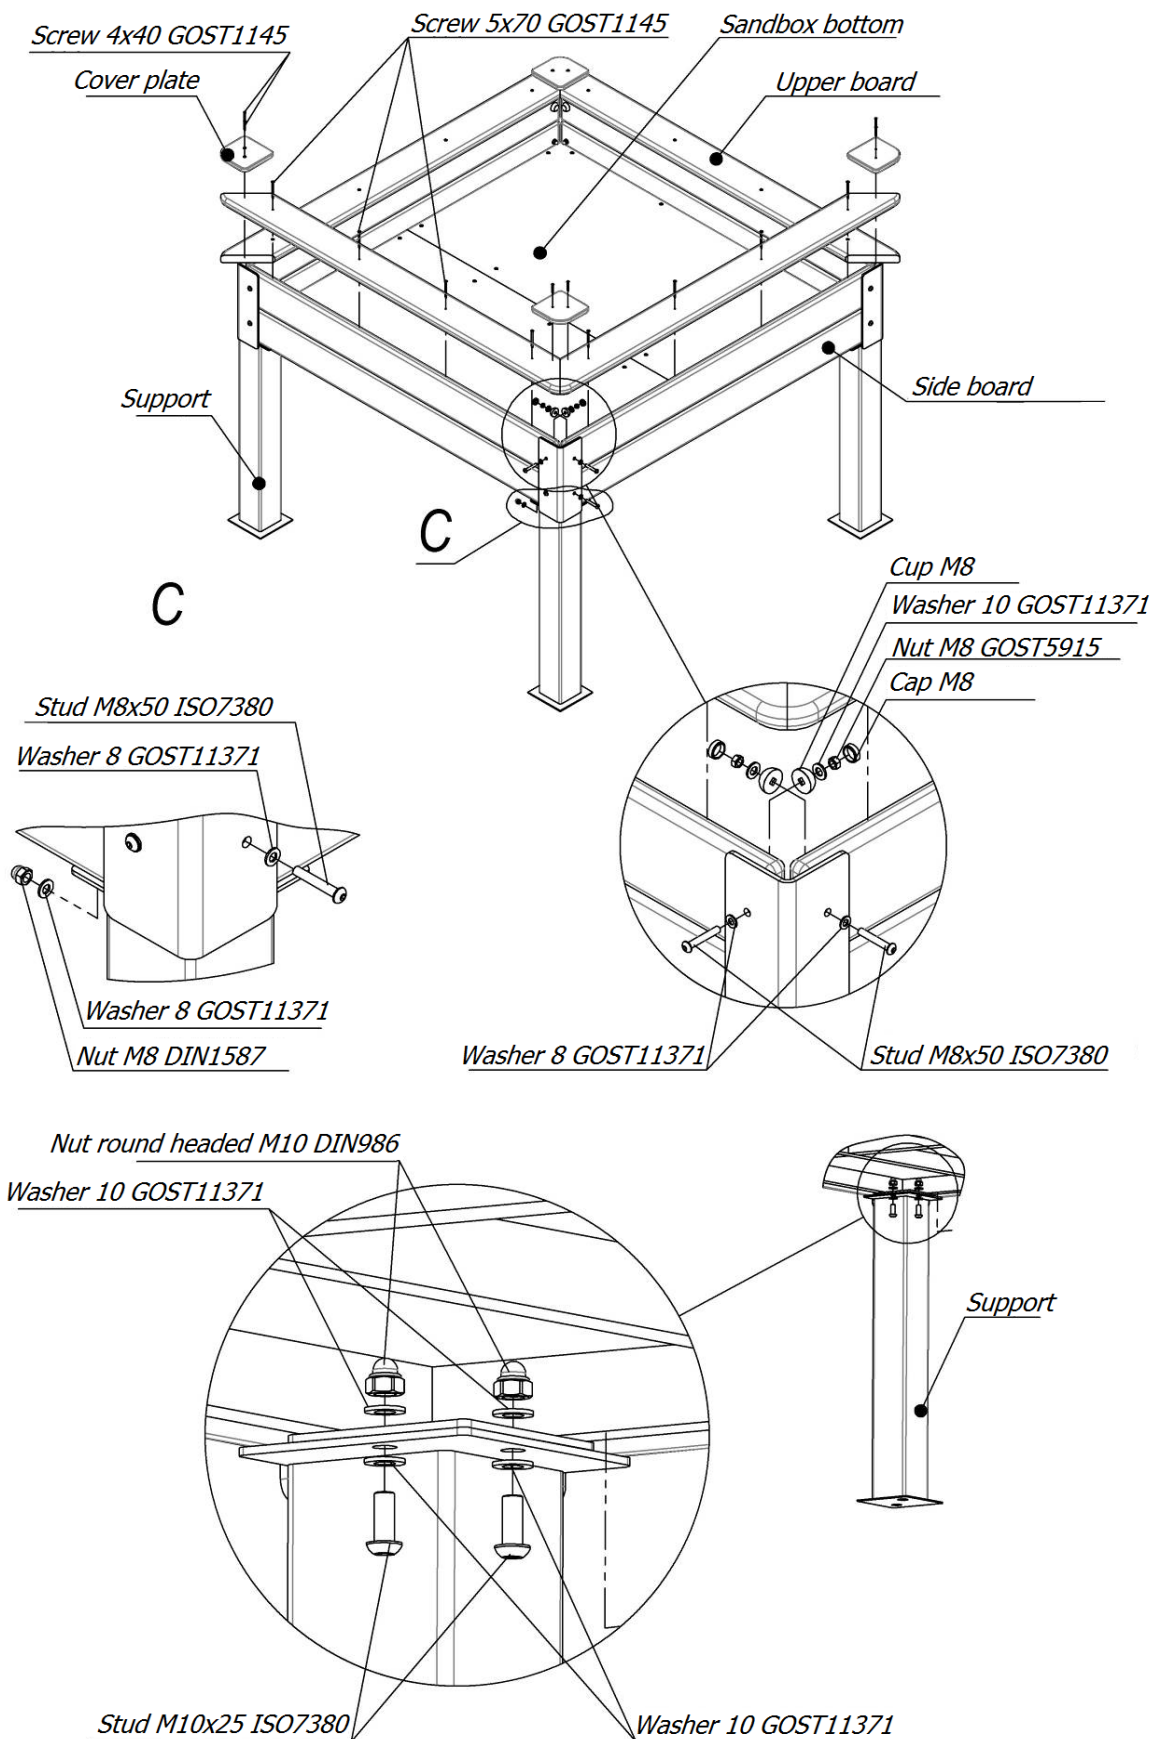

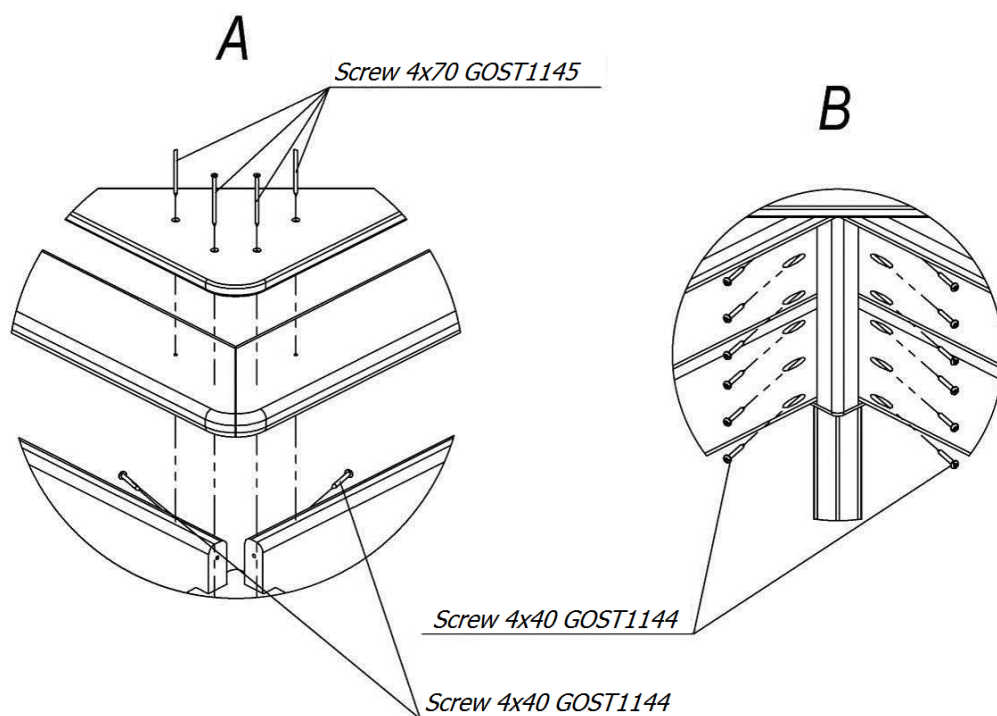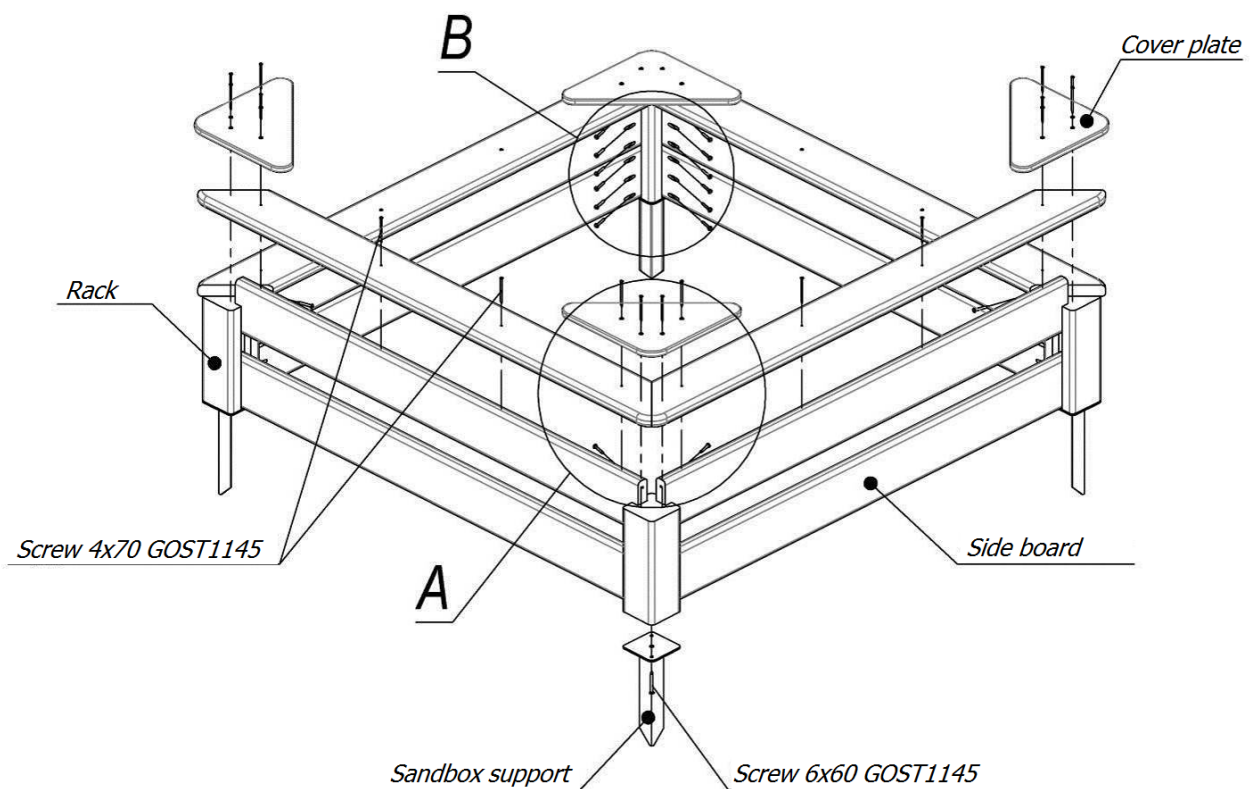

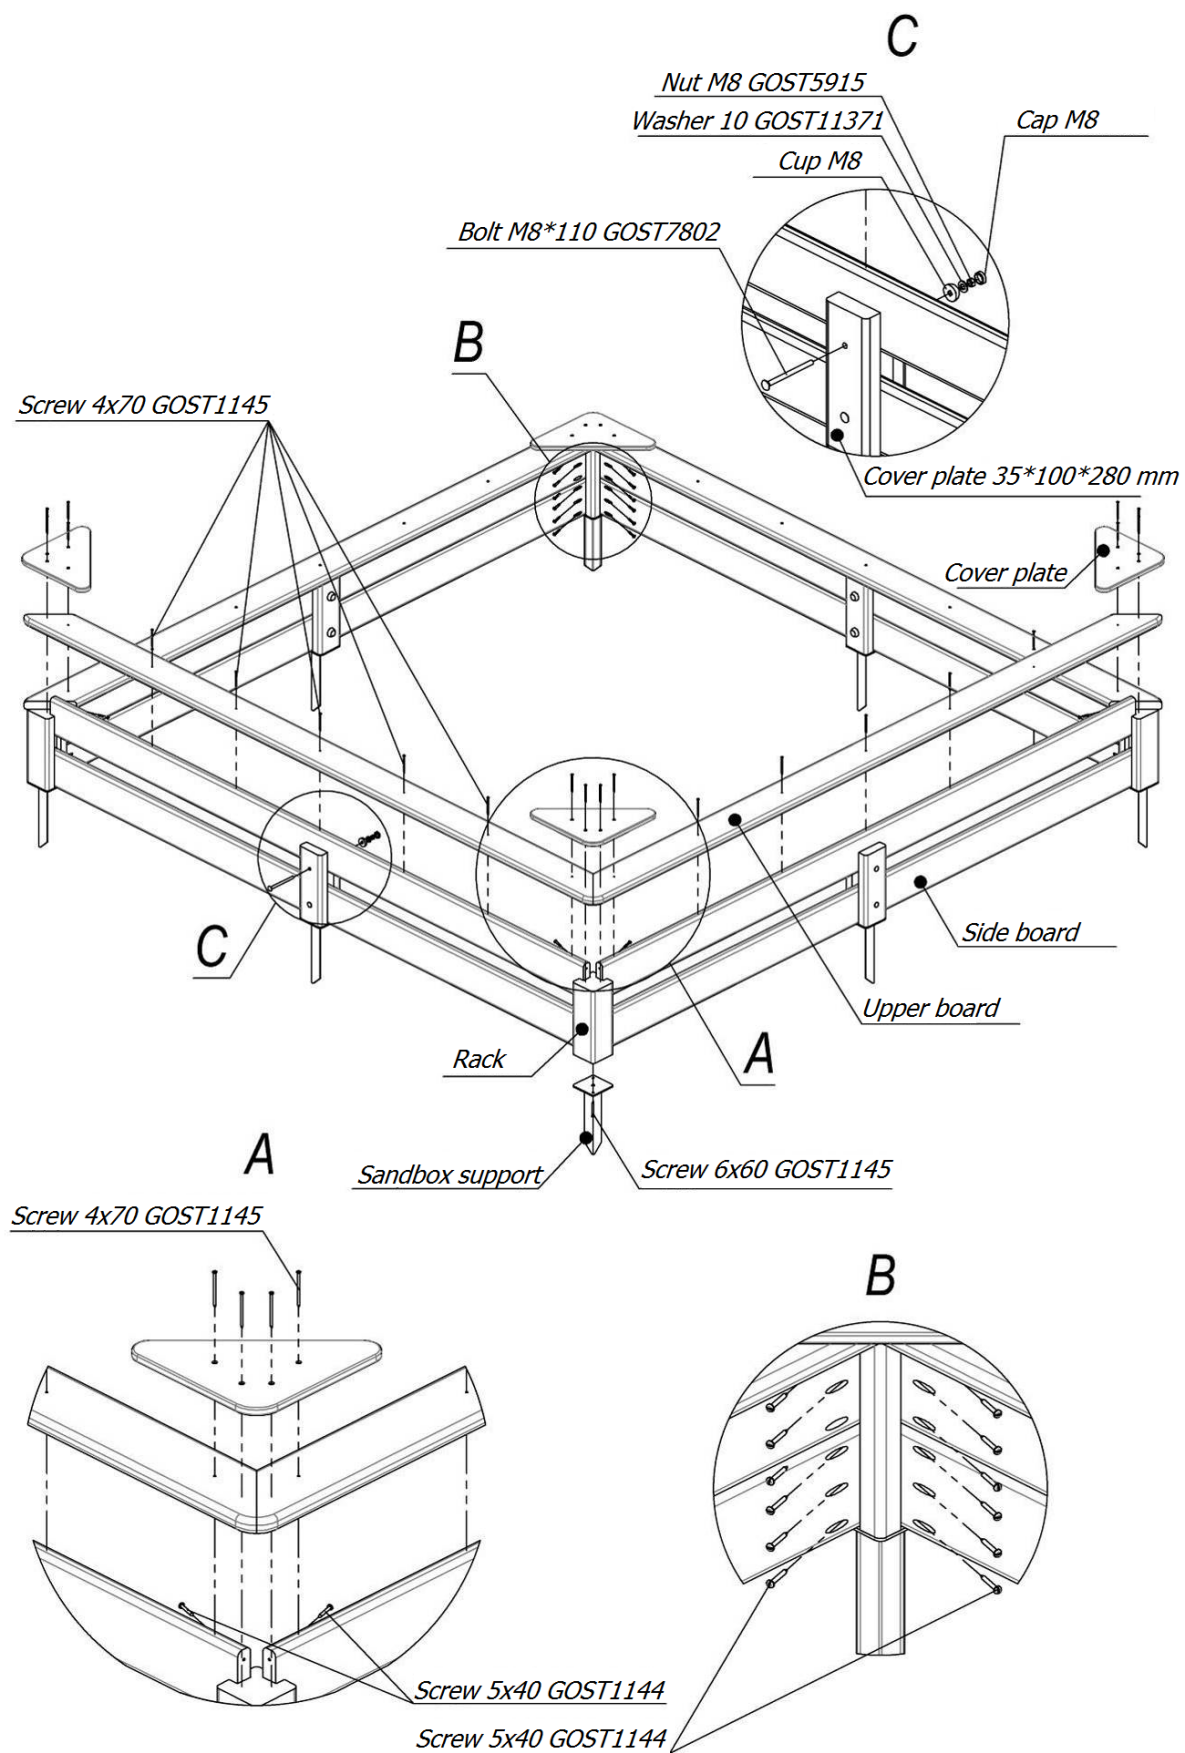


Assembly scheme TE338

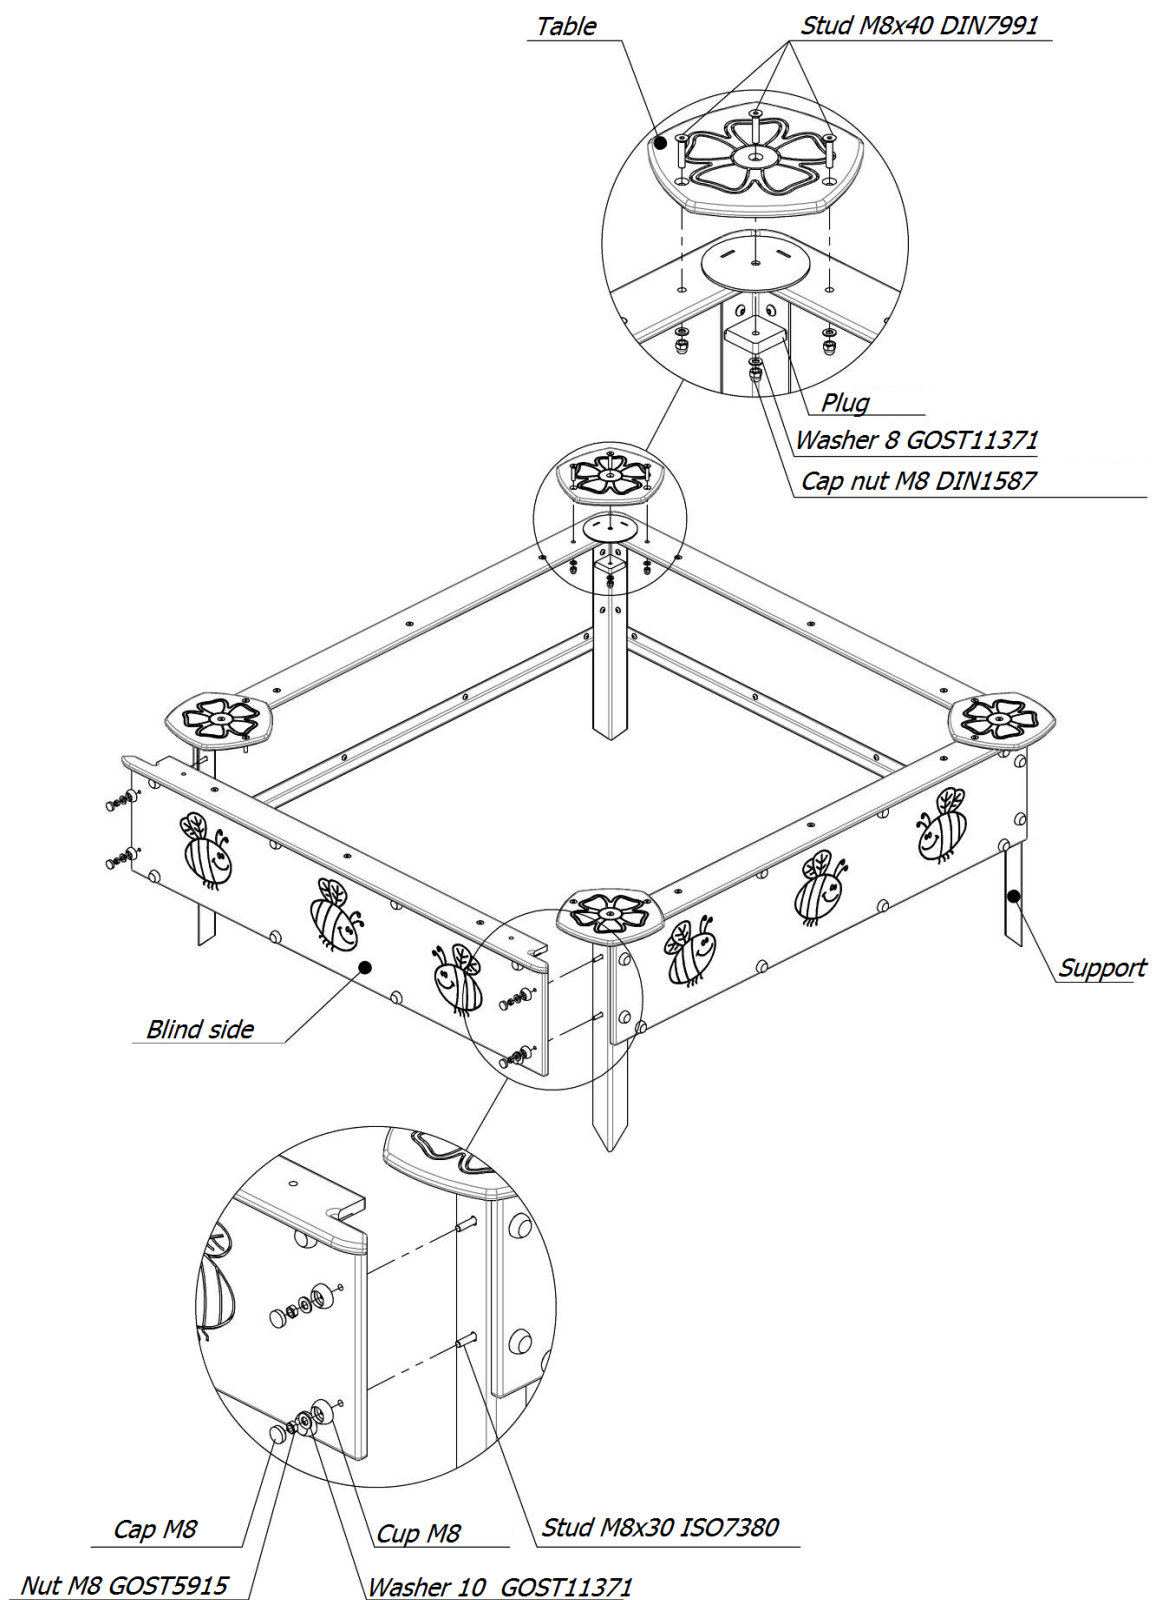




Assembly scheme for TE339 is identical. For more information on the assembly scheme, see the 'Appendix'


Assembly scheme TE338.1

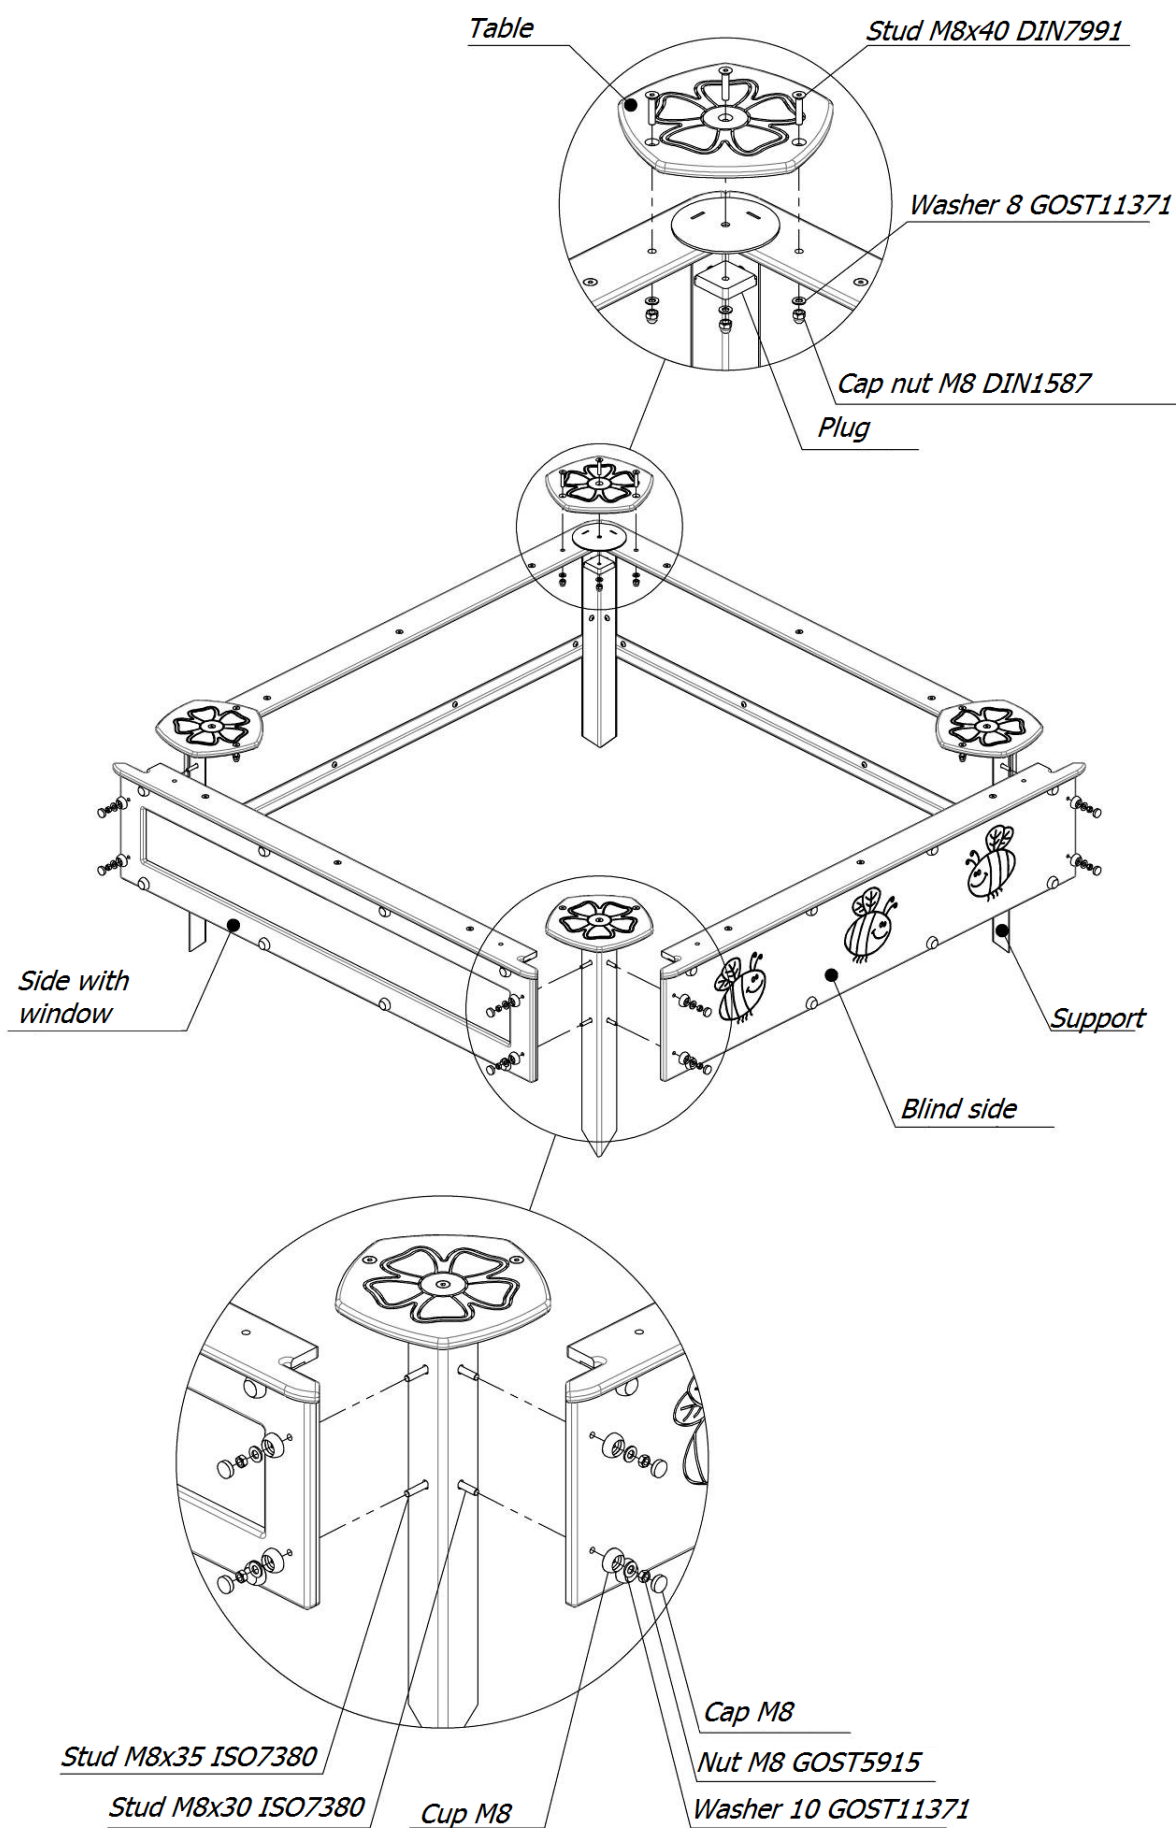

5. INSTALLATION SCHEME OF THE PRODUCT

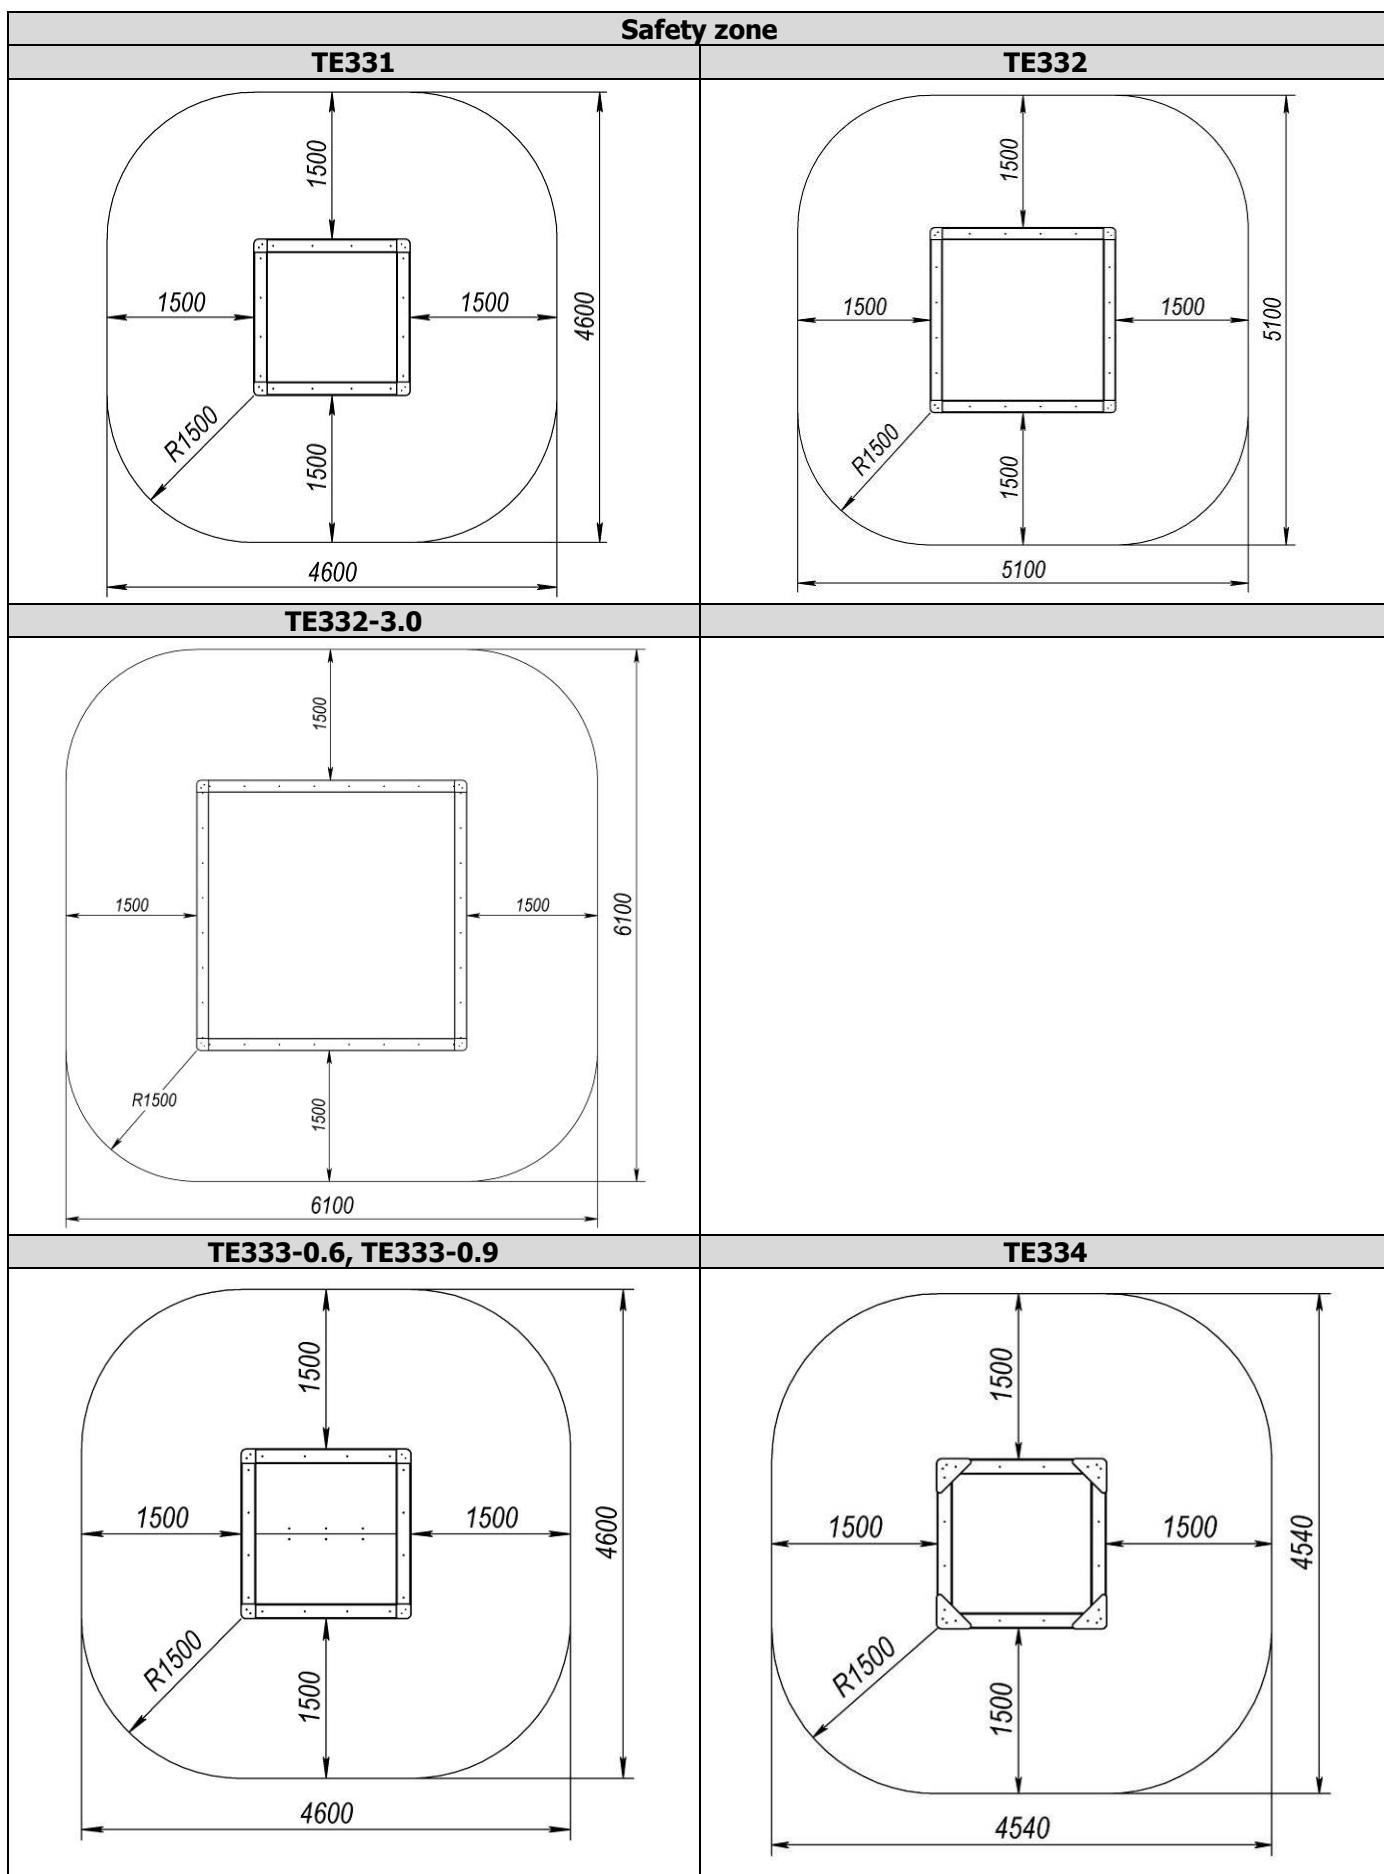

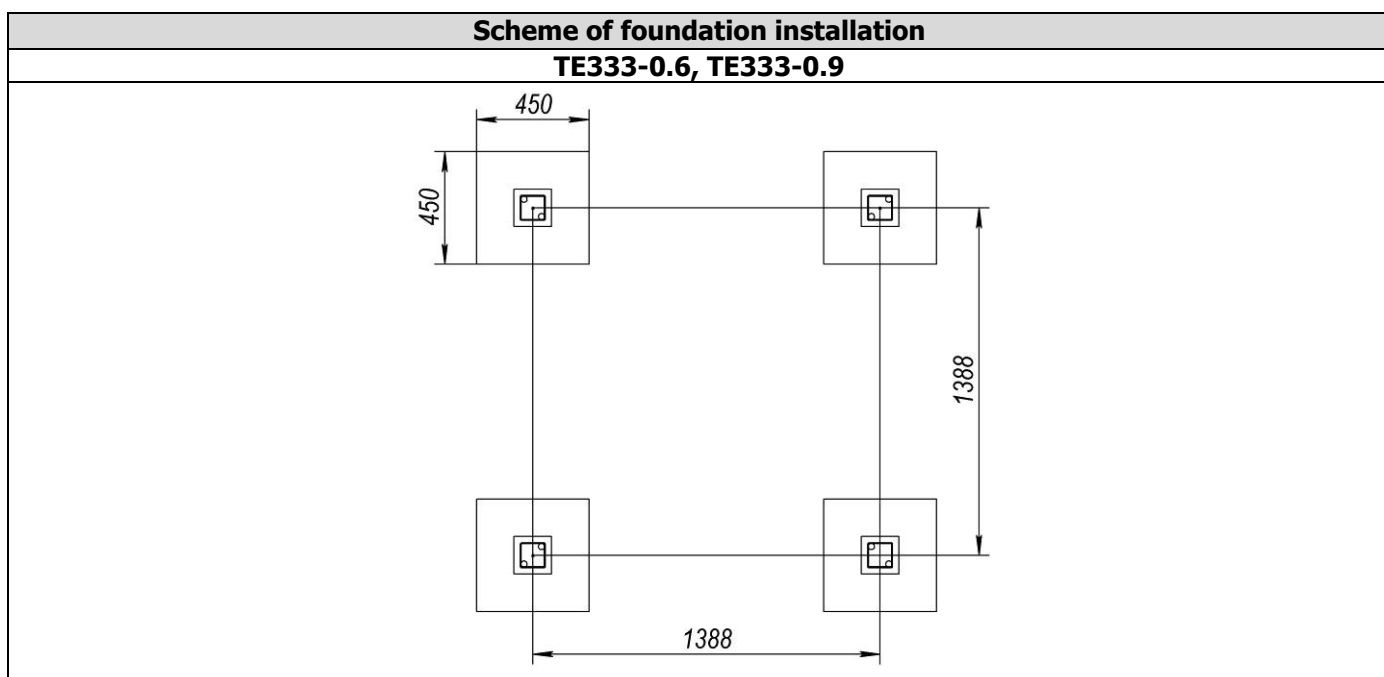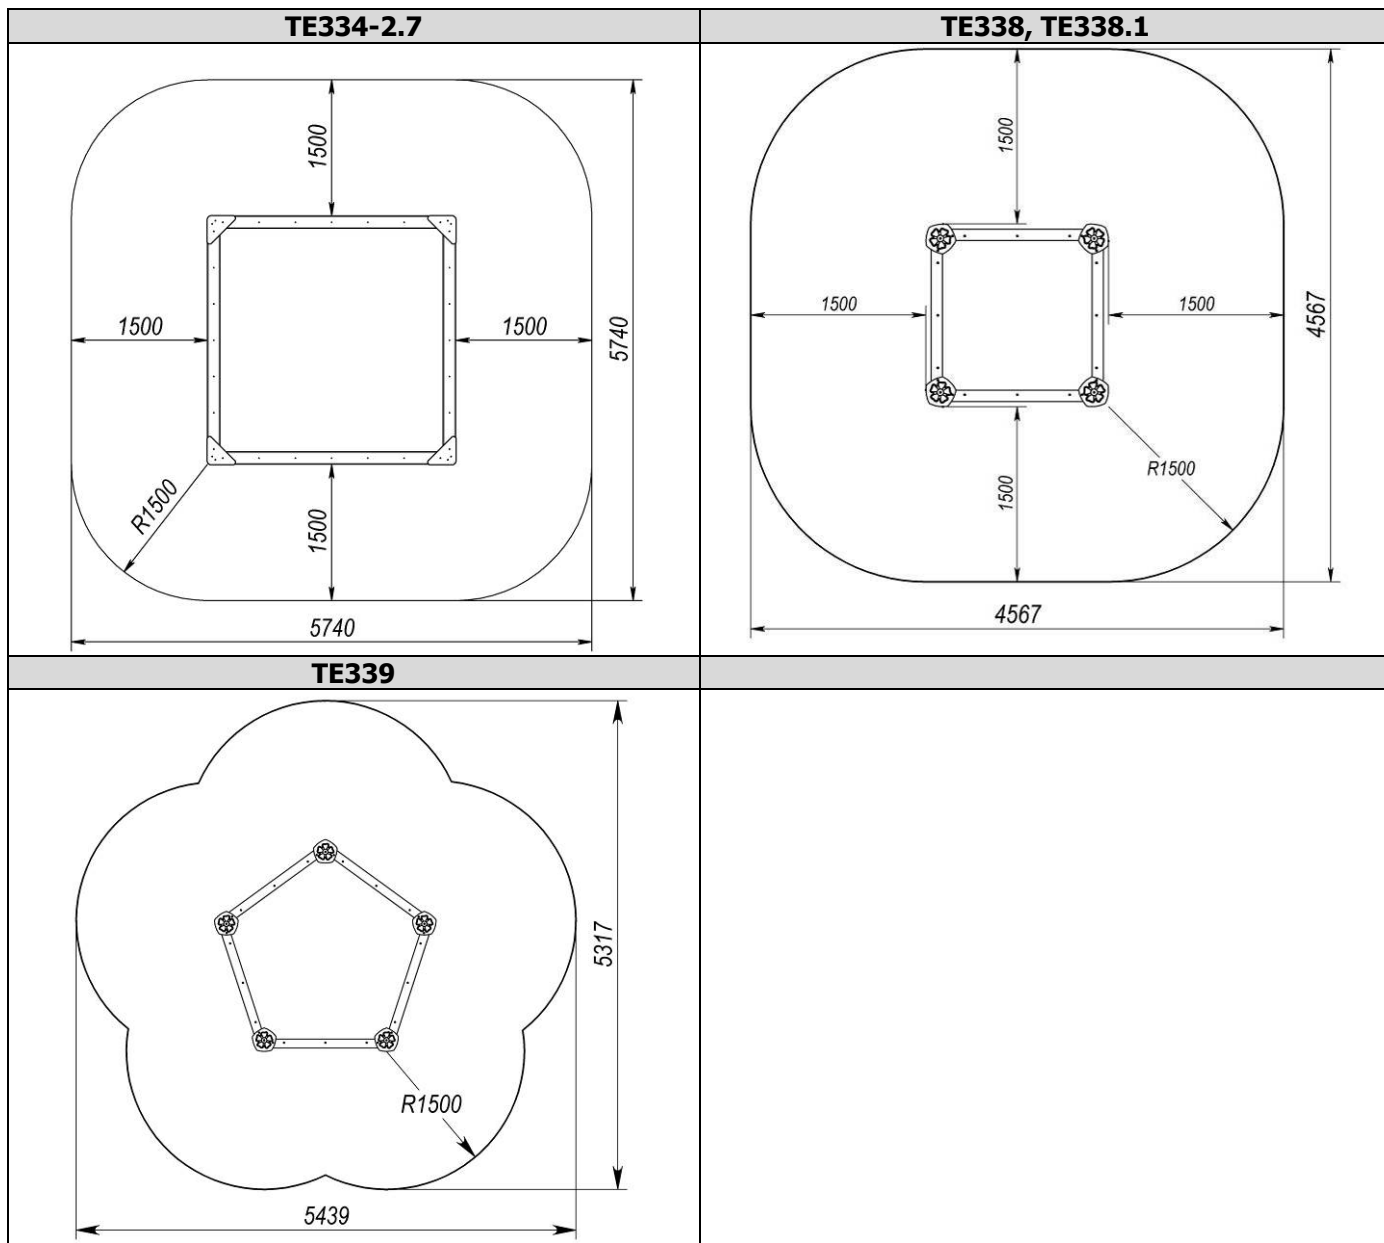

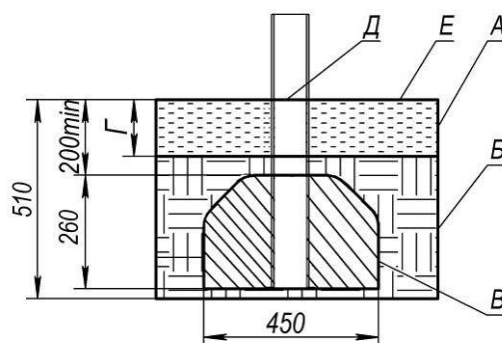

For TE333-0.6, TE333-0.9

A - shock-absorbing coating;

Б – soil;

В – concrete;

Г - depth of the shock absorbing coating;

Д - product level plane;

Е – game surface.

Examples of impact-absorbing coatings

Material ¹	Description	Minimal depth, mm	Free fall height, mm
Turf			≤ 1000
Tree bark	grain size 20-80 mm	200	≤ 2000
		300	≤ 3000
Sawdust	grain size 5-30 mm	200	≤ 2000
		300	≤ 3000
Sand ²	grain size 0.2-2 mm	200	≤ 2000
		300	≤ 3000
Gravel ²	grain size 2-8 mm	200	≤ 2000
		300	≤ 3000
Another material	HIC tested according to EN 1177	According to the test	According to the test
1. Materials are specially made for the playgrounds. 2. No clay inclusions should be present. Grain size is obtained by sieving through a sieve as in EN 933-1.			

6. INFORMATION ON STORAGE, TRANSPORT AND DISPOSAL

The product is transported in the manufacturer's packaging by any means of transport that ensures its safety and protection from external factors (rain, snow, sunlight, water, high humidity, etc.).

Information about transportation

Date		Brand, state number of the ca/trailer	Position, full name	Signature
Departure	Arrival			

Before installation, store the product in the original packaging in dry, closed rooms with natural air ventilation.

If it is necessary to transport the product to another location after use, it is recommended to use the manufacturer's packaging.

If long-term storage of the product is required, the following storage rules must be observed (the list of conditions is not complete):

- place the product in a closed dry room with natural ventilation;
- protect the product from external factors (dust, water drops, etc.) with a large plastic bag, leaving

space for free air circulation;

- take other measures to preserve the appearance and characteristics of the product during storage.

When removing the product from storage and preparing for installation, follow the next recommendations:

- remove the product from the packaging material (polyethylene, cardboard, other packaging materials);
- remove dust and other contaminants from the surface of the product;
- check completeness and absence of parts damage.

Storage information

Date		Product storage conditions	Full name	Signature
Putting into storage	Removal from storage			

After the end of the equipment's service life, the buyer independently determines the procedure for its use. If you decide to recycle, contact the seller or specialized organizations.

The equipment does not contain harmful impurities and materials that can harm your health and is not subject to special recycling.

7. USE OF THE PRODUCT

Do not use the product until it has been fully and completely installed.

The product must not be used by users of a different age category.

The product must not be used by users of a different weight category.

Before using the product, clear the safety area of any unnecessary objects that may cause damage to the user (debris, tools left over from assembly and installation, etc.).

Do not use the product in adverse weather conditions (ice, snow, rain, hail, strong winds, etc.), which may cause injury to the user.

8. PRODUCT MAINTENANCE

You have purchased high-quality and reliable equipment. In the process of its production, the requirements of regulatory and technical documents of Ukraine, the CIS countries and the European Union regulating the production of children's gaming equipment were taken into account. However, it should not be forgotten that when operating any technical product, certain rules and requirements must be followed. Despite the fact that our product is of high quality and reliability, this rule applies to it in full. You should be aware that the implementation of the following rules and recommendations for product maintenance is aimed at ensuring that your child, the child of your friends or acquaintances is safe and no unforeseen factors threaten his health, life.

Remember that the operation of the product is accompanied by the influence of various negative factors on it, a complete list of which cannot be predicted. Among them, an important place is occupied by natural factors and factors caused by human influence on equipment. As a rule, their action initially leads to disruptions in the appearance of the product. Thus, under the influence of factors caused by the exploitation of a person, there may be damage to the integrity of the paint coating of parts made of wood, in the form of scuffs, chips, incisions, and when exposed to parts made of metal, damage to the paint coating in the form of nicks, chips, abrasion, etc. This leads to the emergence and development of defects that can be the cause of the destruction of the product. The product is particularly dangerous if it is used for other than its intended purpose, if the permissible loads are exceeded, or if vandalism occurs, as these factors can cause irreversible changes in the structure of the material from which the product is made, leading to destruction.

The maintenance of the product implies, first of all, the responsibility of the user to comply with all recommendations provided in this document, starting with a daily inspection of the external condition of the product before operation.

Daily inspection of the product is a very important procedure. With its help, you can timely detect any changes in the appearance of the product (deformation of individual parts, deformation of the structure as a whole or part of it, damage to parts, cracks of welds, as well as the absence of fastening of parts of the product, etc.).

Before using the product, check its operability, absence of damage, dirt on the product, sharp edges, reliability of fixing the structure, absence of unnecessary objects on the surface of the site. If the product is damaged, fully or partially inoperable, or has any other defects, do not use it.

During operation it is also necessary to inspect the condition of the product periodically - the current inspection. It includes an external inspection of the product, checking its operability (in the presence of moving elements - the smoothness of the movement of mechanisms, compliance with operating modes, etc.). Current inspection allows you to detect malfunctions caused by the operation of equipment, climatic conditions, acts of vandalism and other factors, until they reach a critical level and the destruction of the product. The current inspection is carried out in order to detect foreign objects that may threaten the user and lead to violations of the functioning of the product. The frequency of the current inspection is set by the owner taking into account the operating conditions. If you do not have sufficient technical knowledge and skills to conduct such inspections, we recommend you to contact the authorized specialists of


the manufacturer in order to obtain advice.

Every three months, a scheduled inspection should be carried out, which primarily concerns the foundation part, load-bearing elements and connection nodes of elements (their integrity and degree of deterioration).


The main annual inspection must be carried out annually by authorised specialists of the manufacturer. During the inspection, the technical condition of the equipment shall be assessed for compliance with safety requirements. The degree of deterioration and damage to wooden elements and their ability to withstand the applied loads, damage, corrosion of metal elements and the impact of these factors on the safety of the product are determined. The inspection also helps to identify the impact of repairs, if any, on the safety of the equipment.

Based on the results of the inspection, a maintenance procedure is carried out to eliminate the identified discrepancies in the product's operation. This procedure includes assessing the condition of parts and assemblies, replacing worn parts, and restoring the integrity of protective coatings. The results of the inspections, as well as the procedures carried out as a result of the inspection and maintenance of the product must be properly documented in the Registration Journal, which is an integral part of this passport. The owner of the product must keep the acts of maintenance of the product, acts of repair work.


Appendix

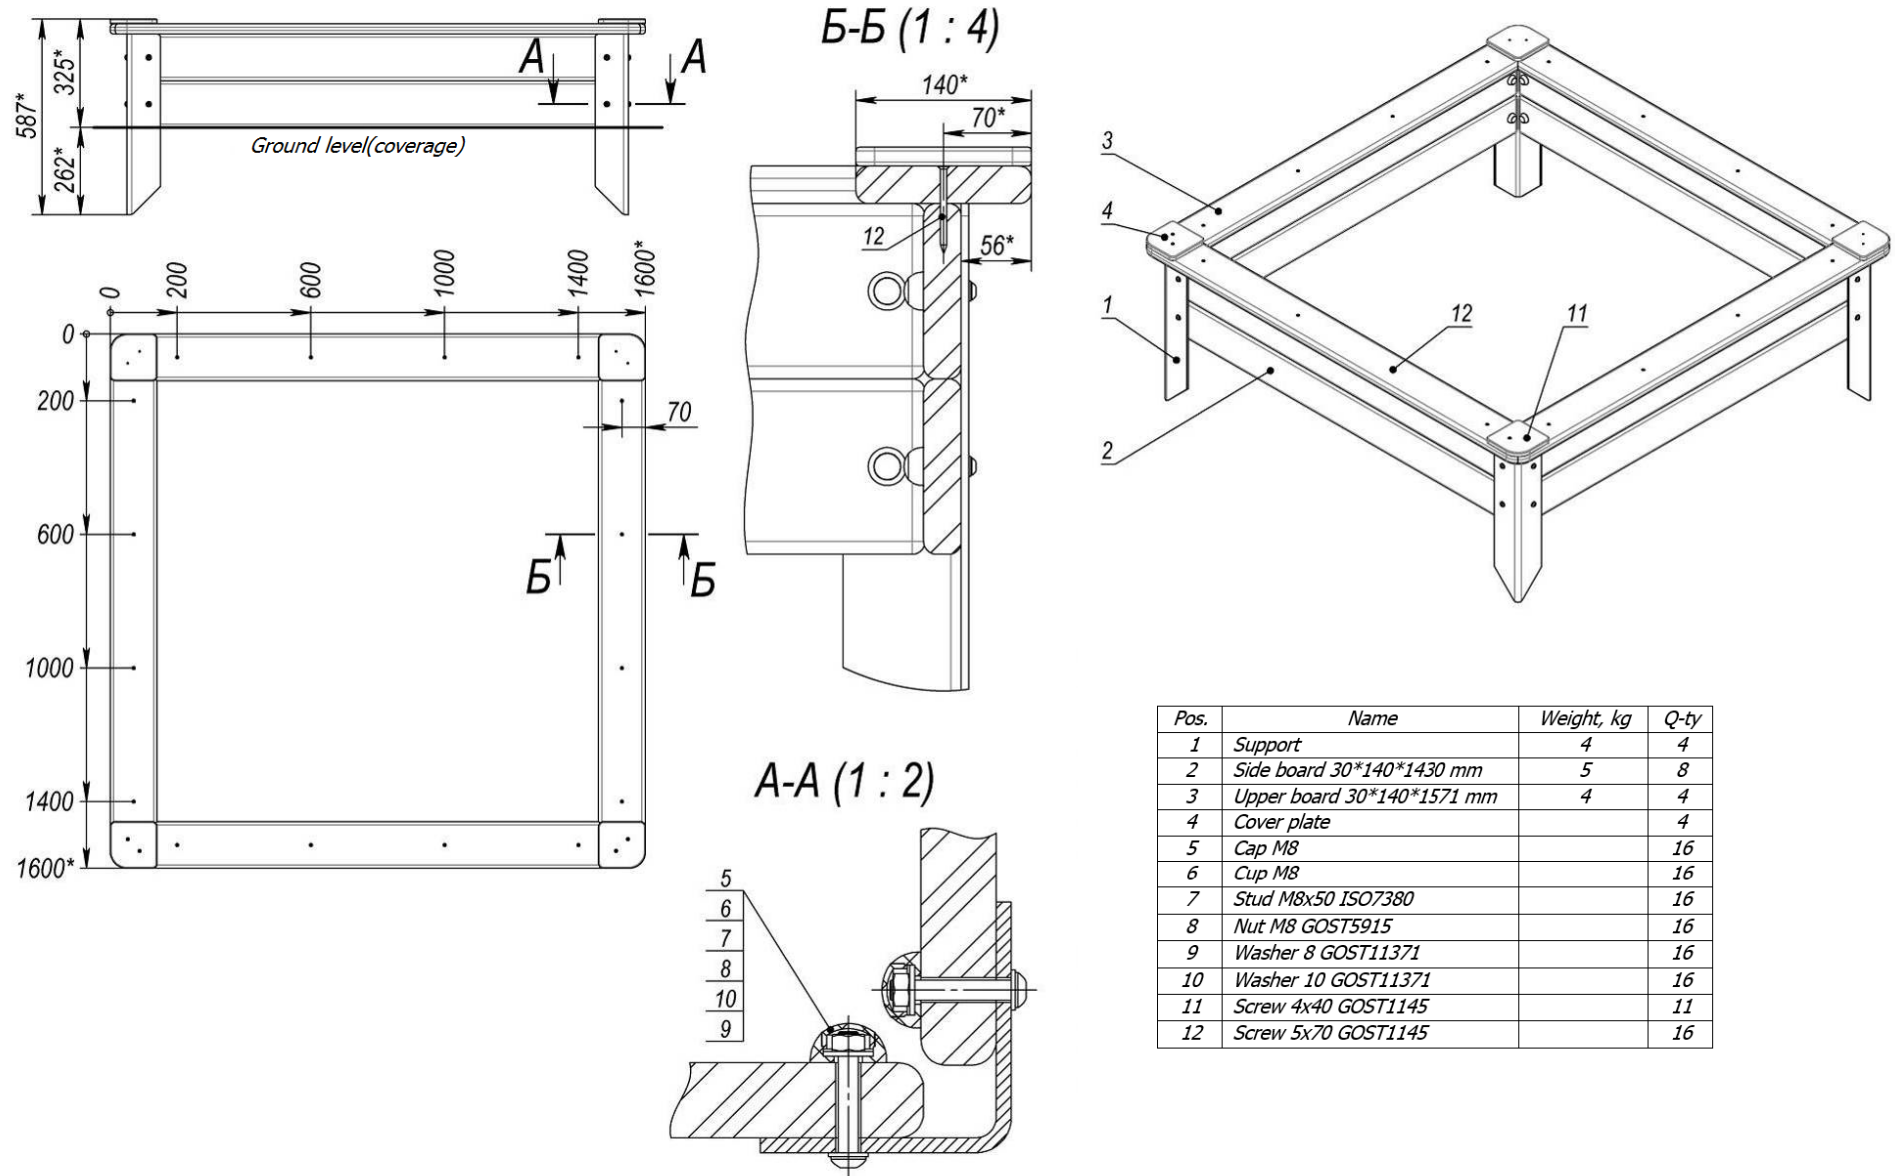


Picture 1 – for TE331

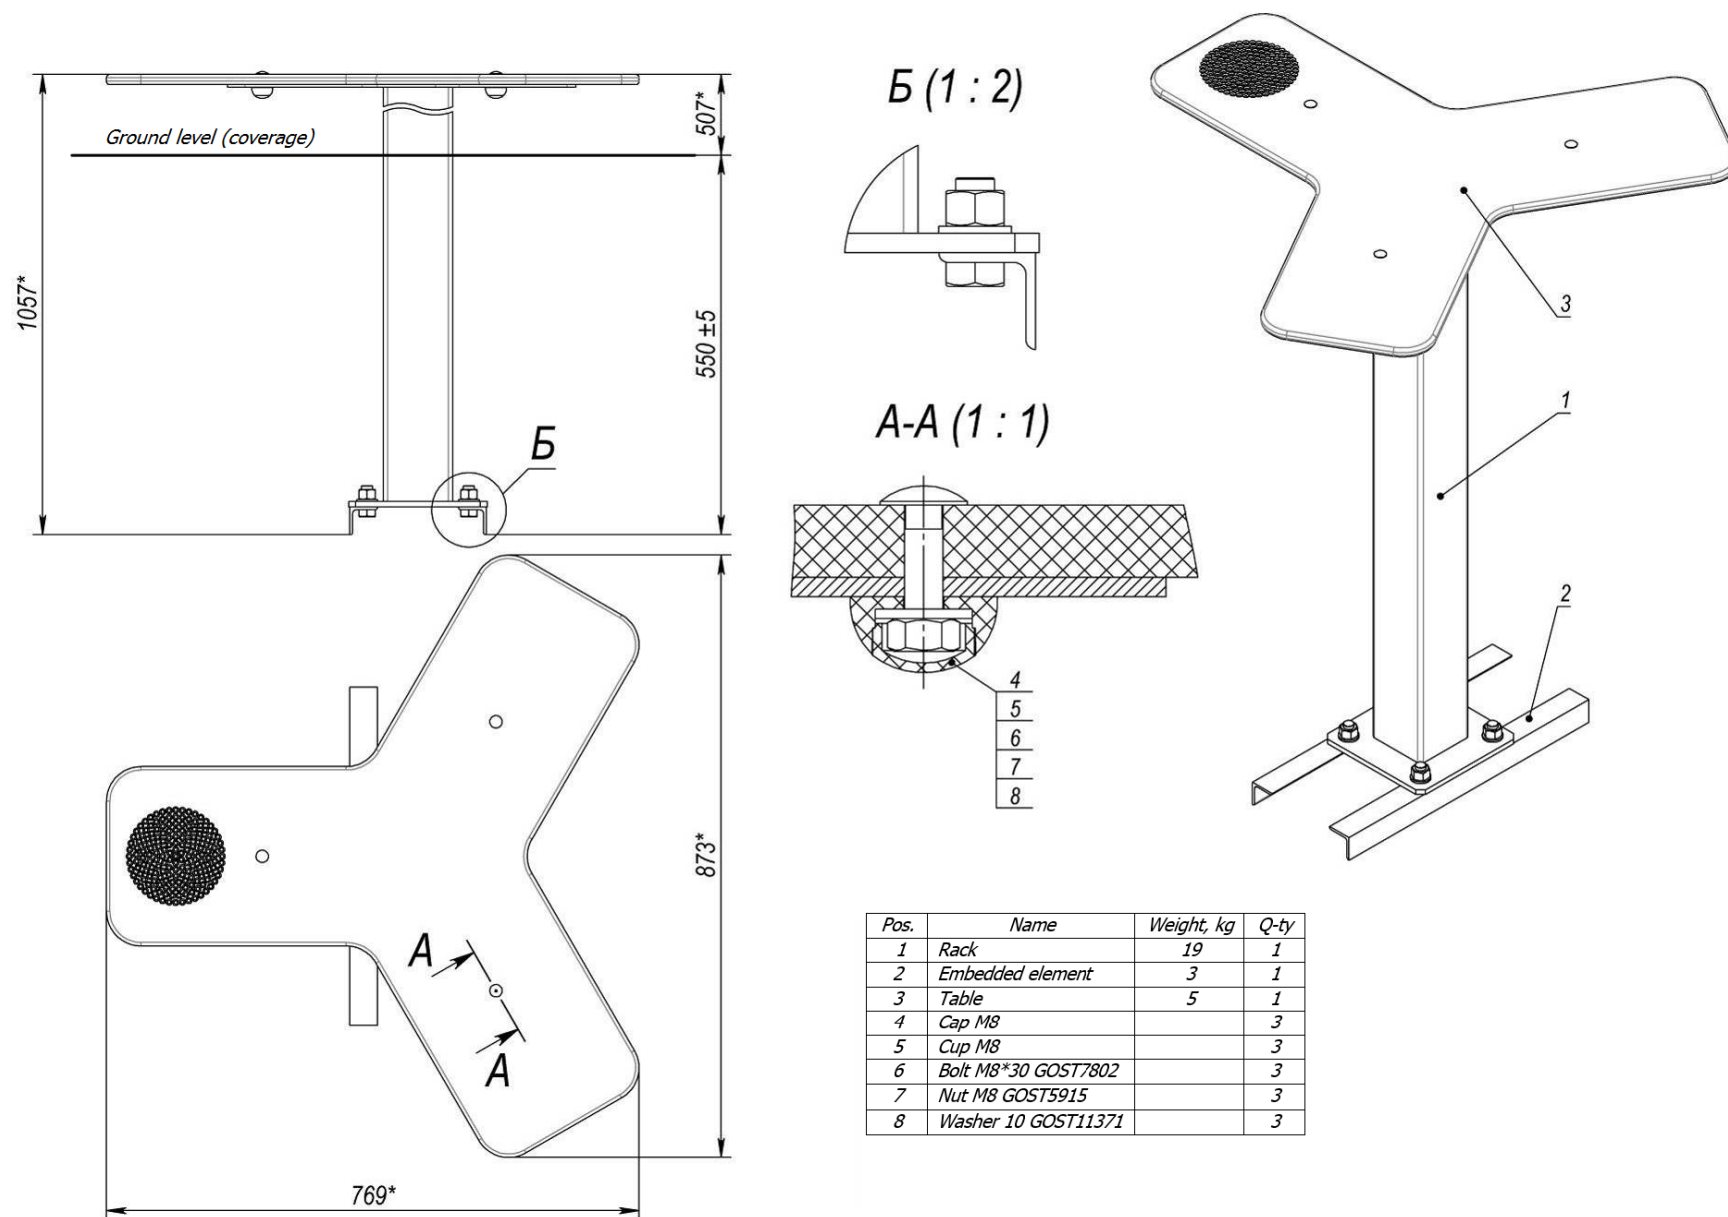


Picture 2 – for TE331.1

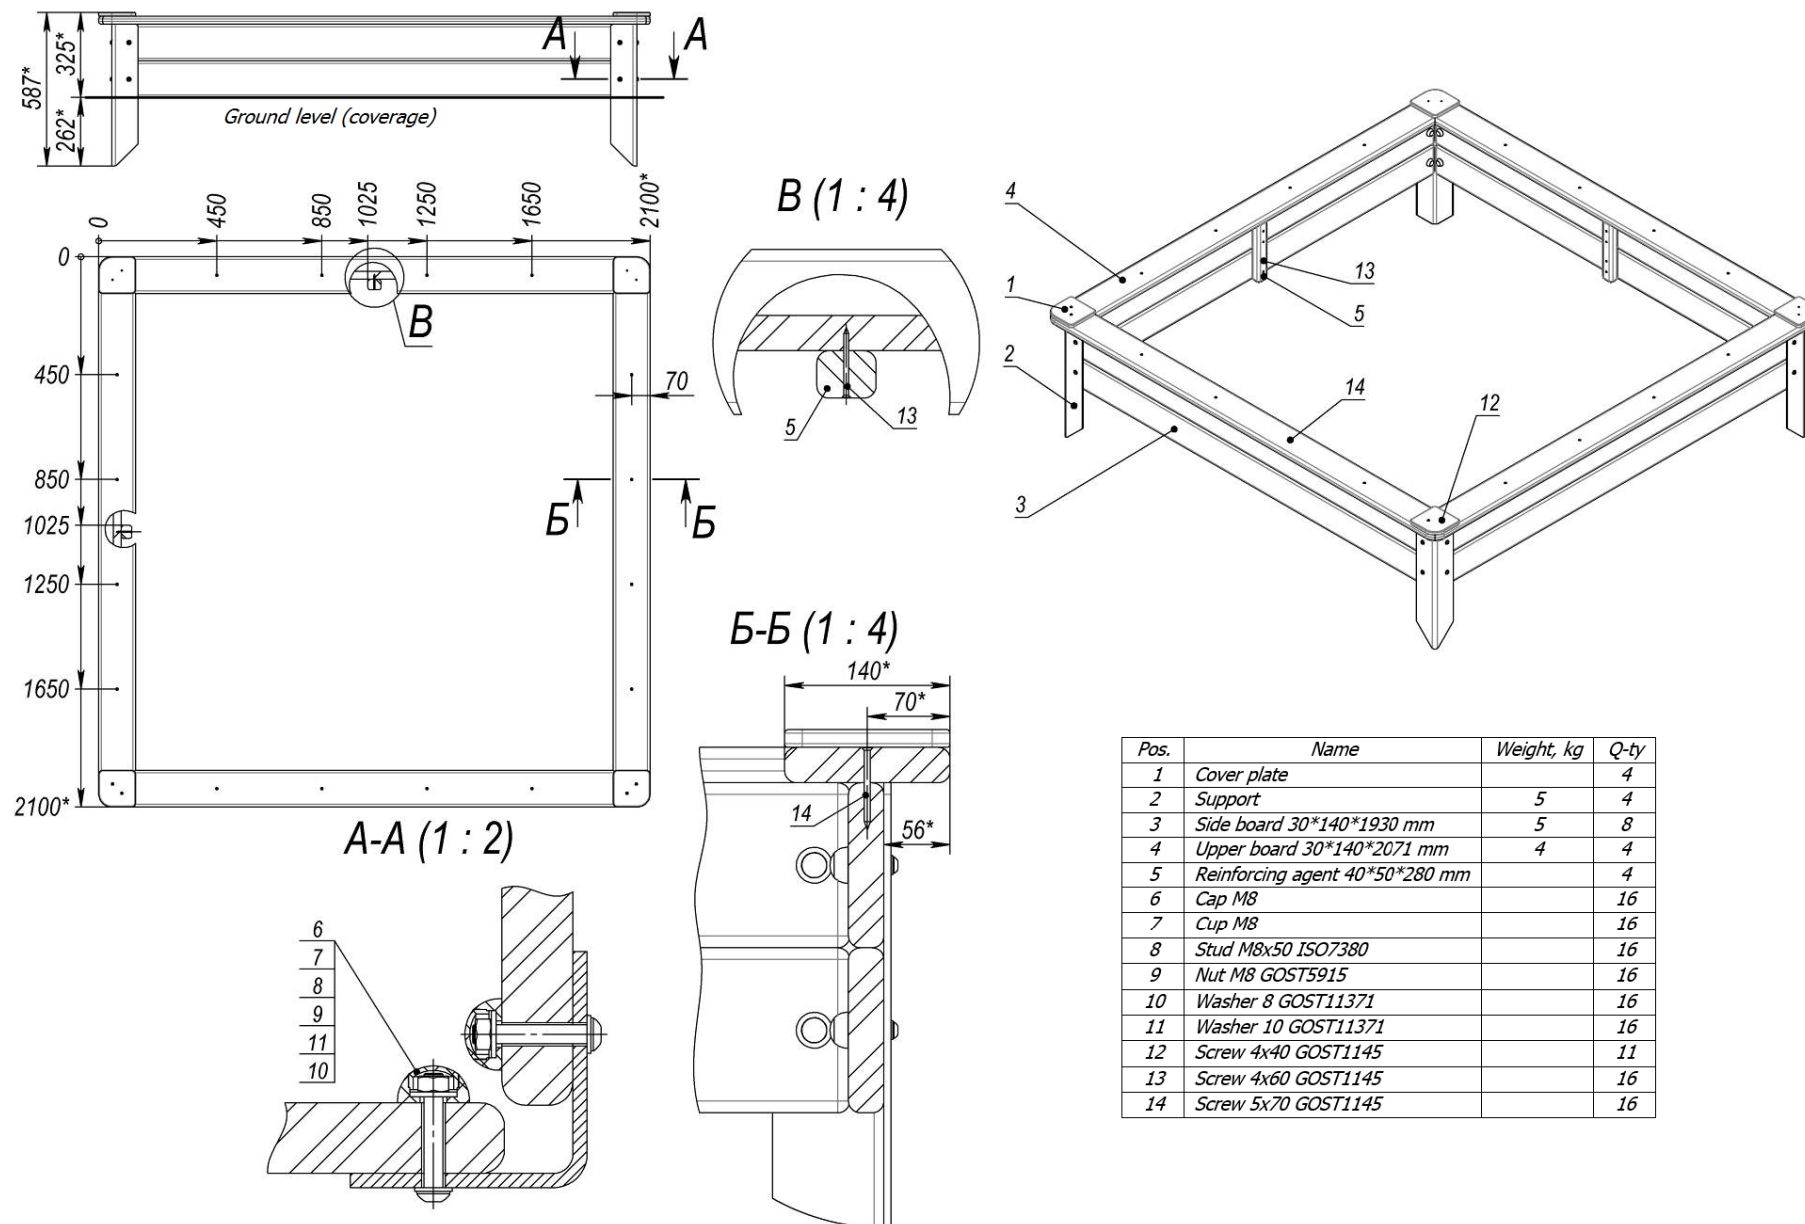


Picture 3 – for TE332

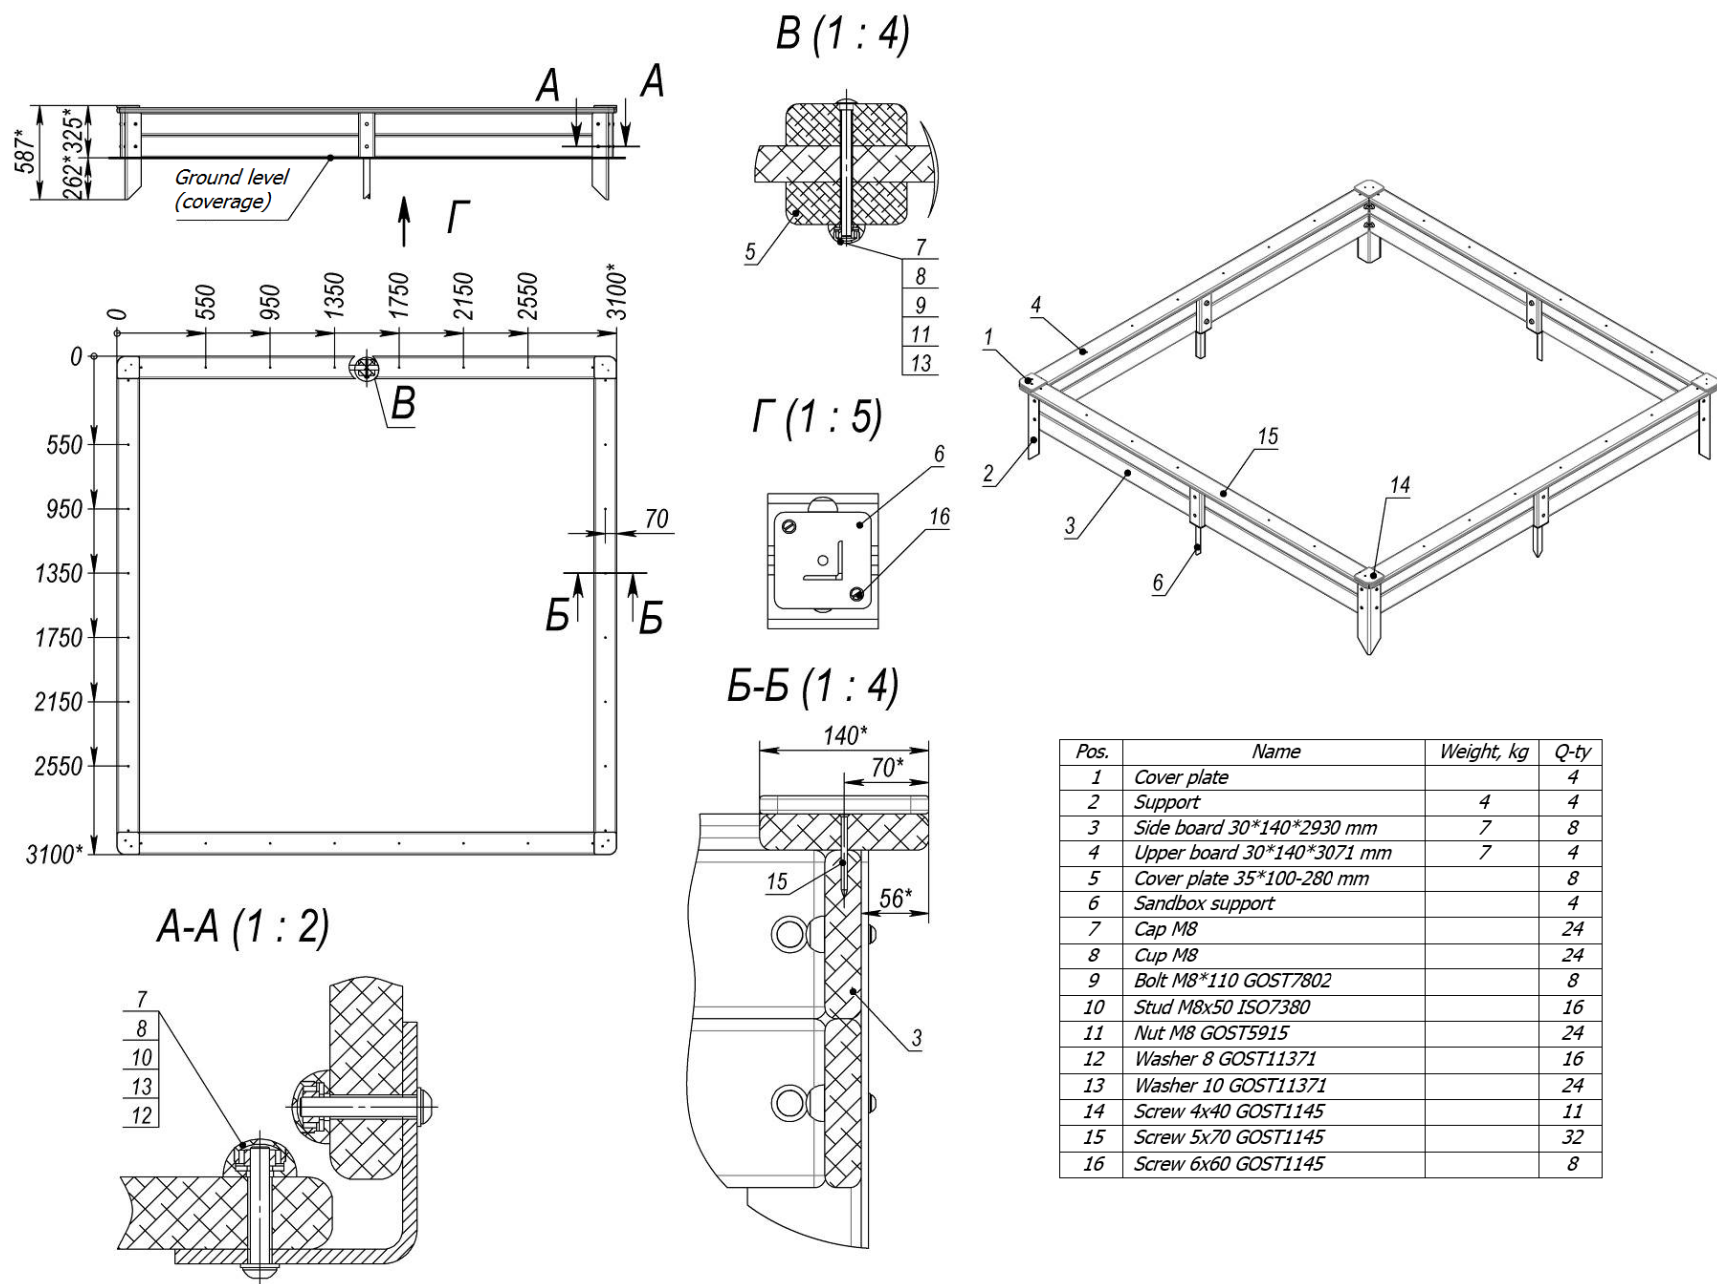


Picture 4 – for TE332-3.0

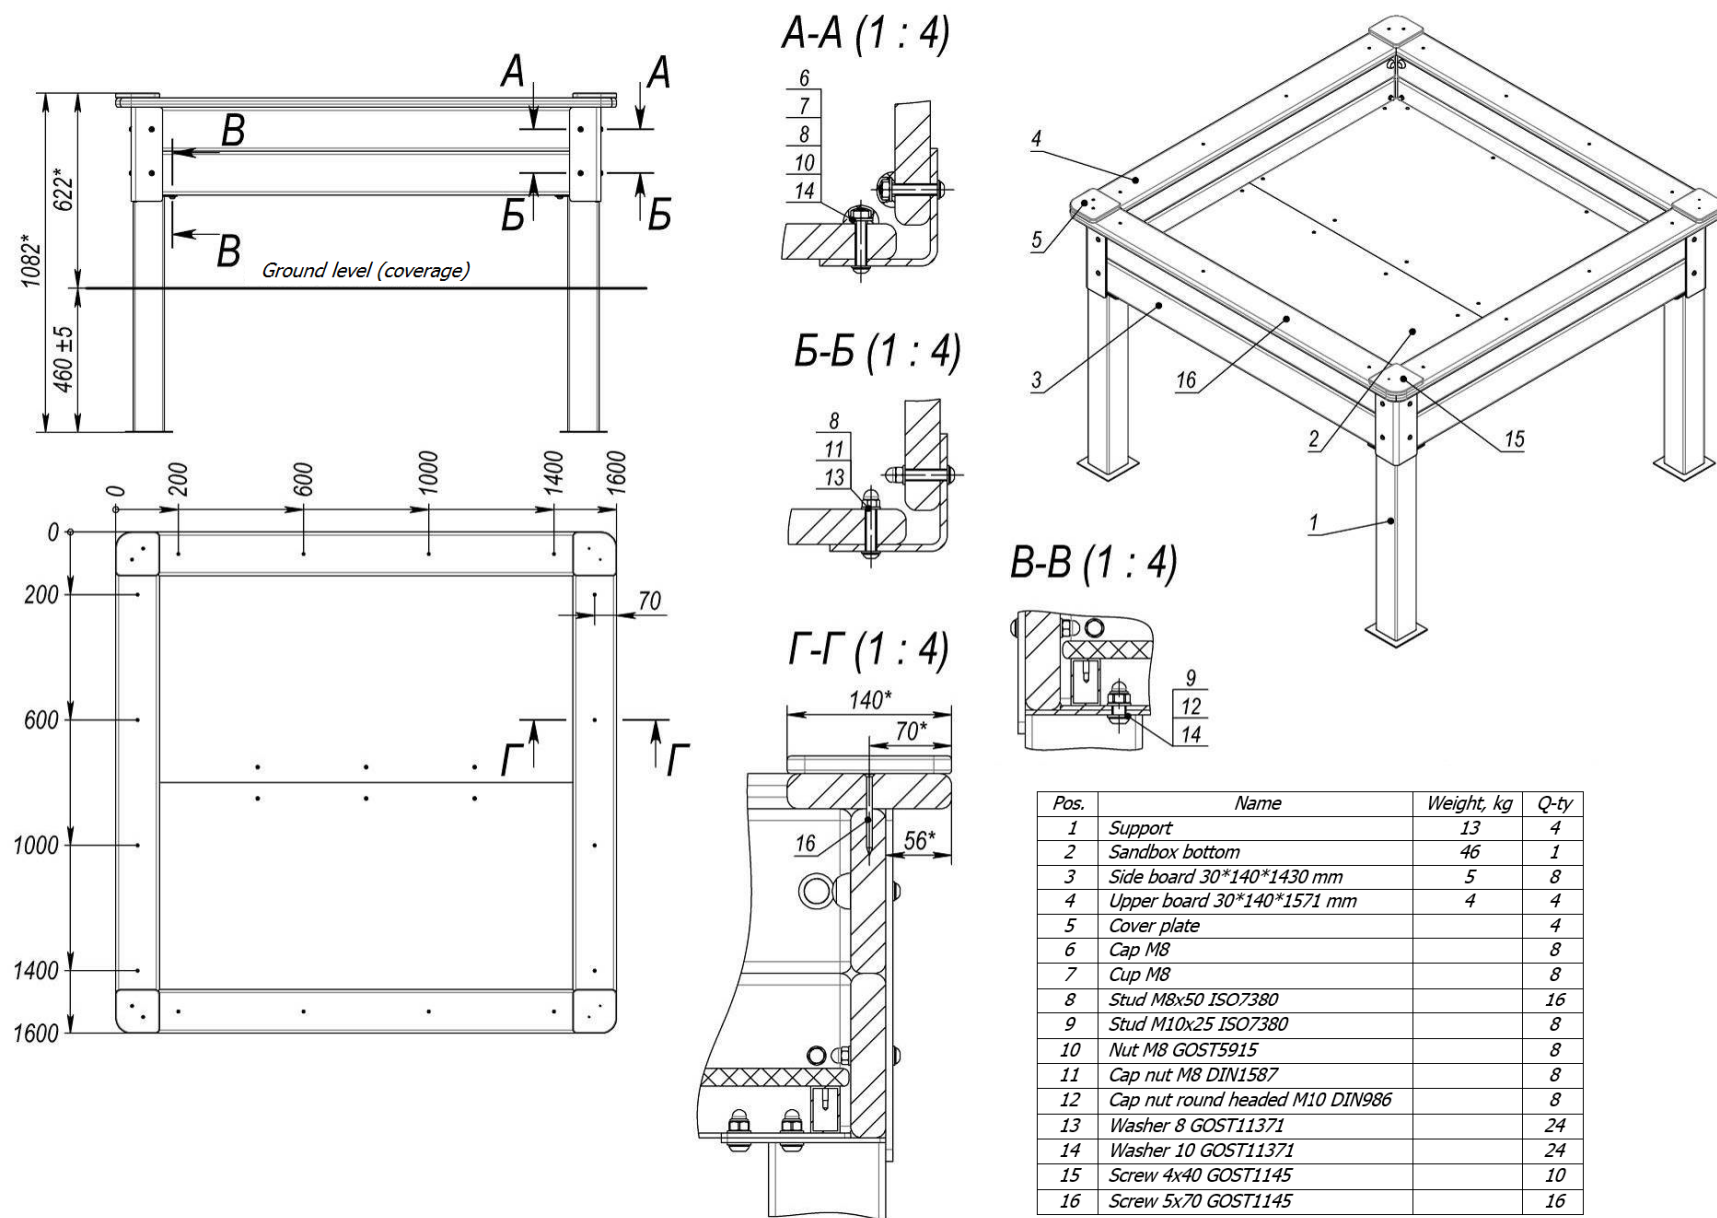


Picture 5 – for TE333-0,6

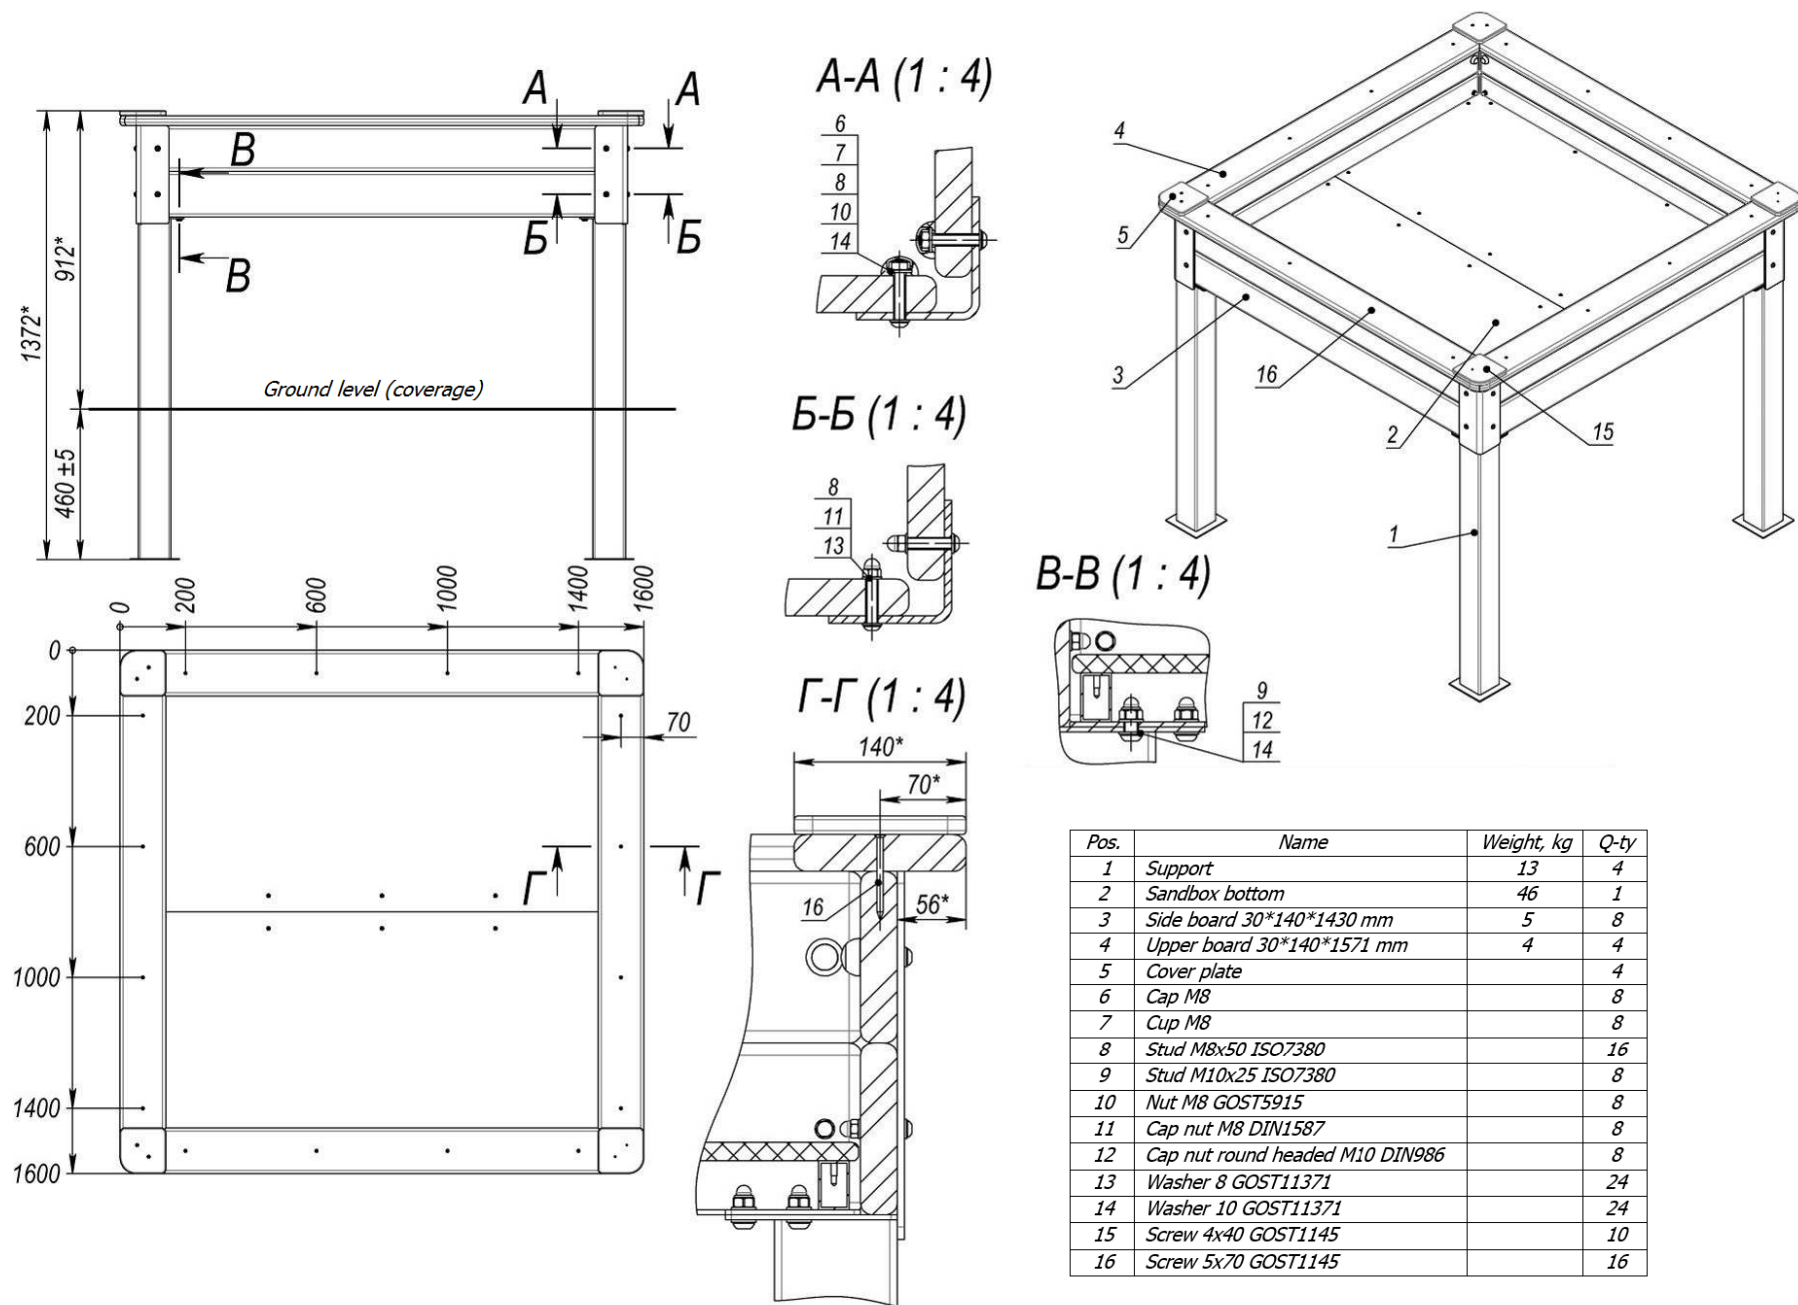


Picture 6 – for TE333-0,9

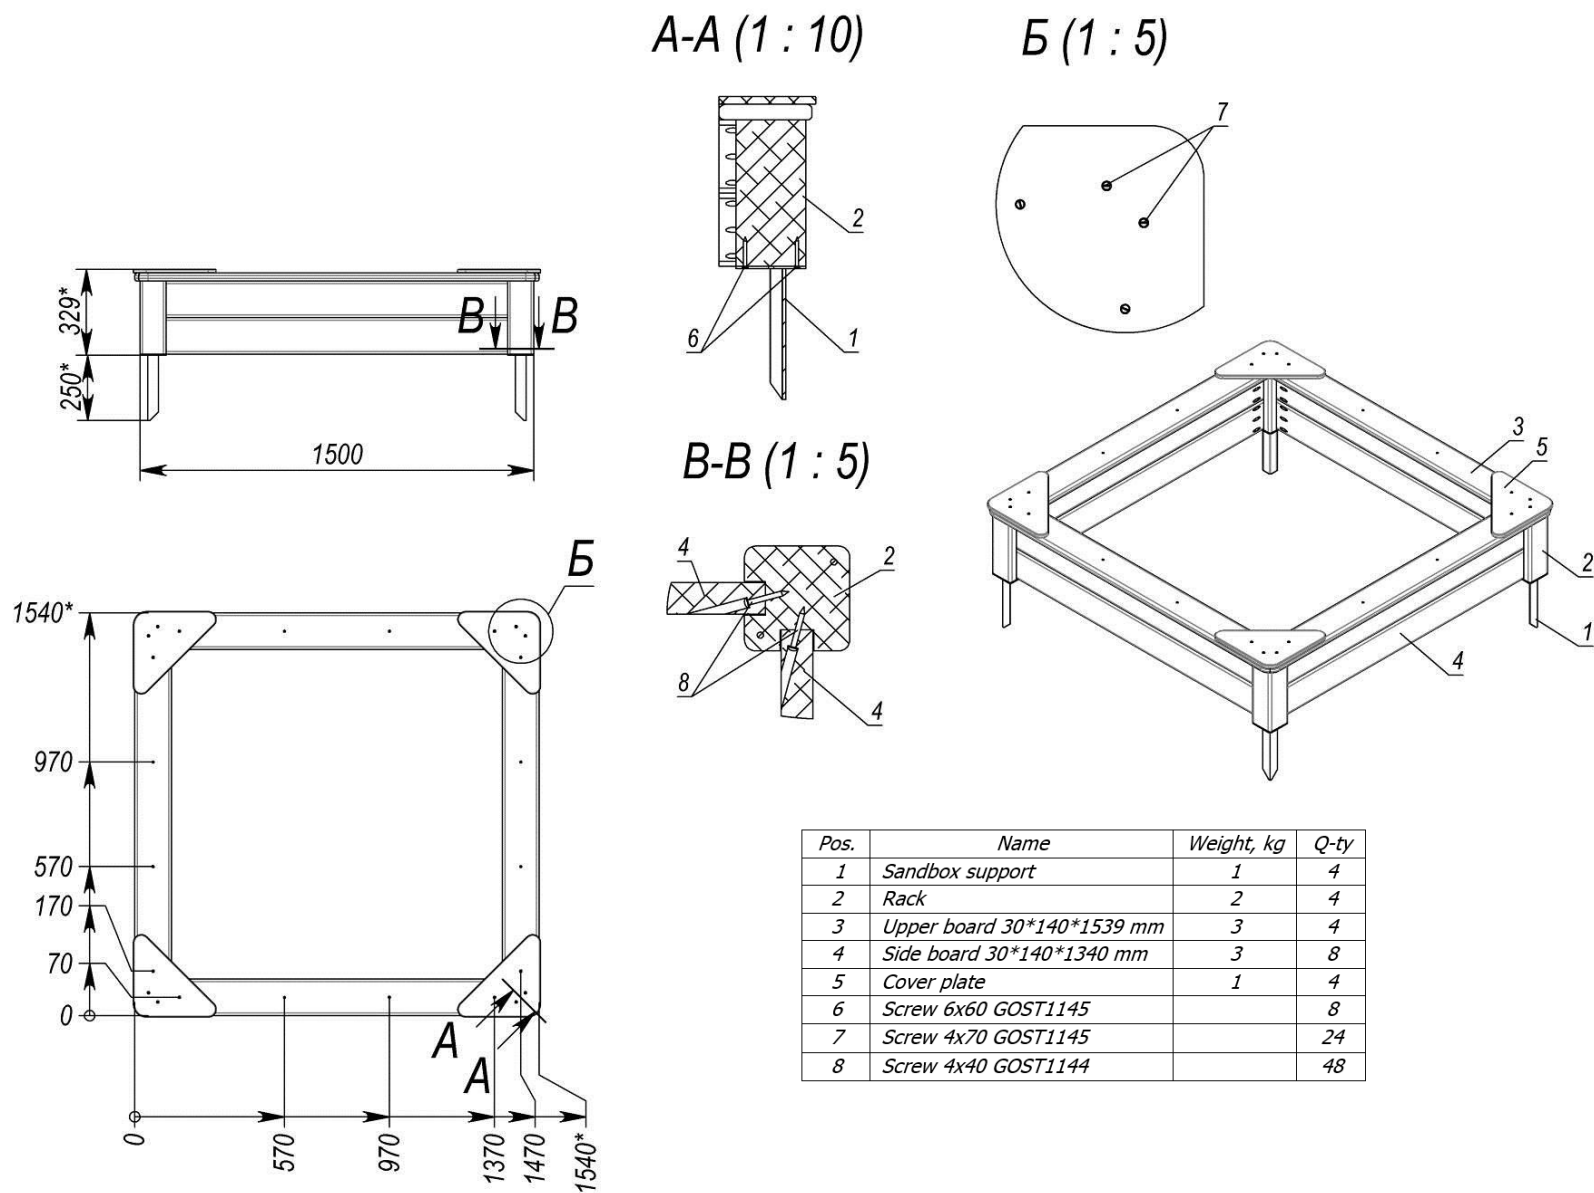


Picture 7 – for TE334

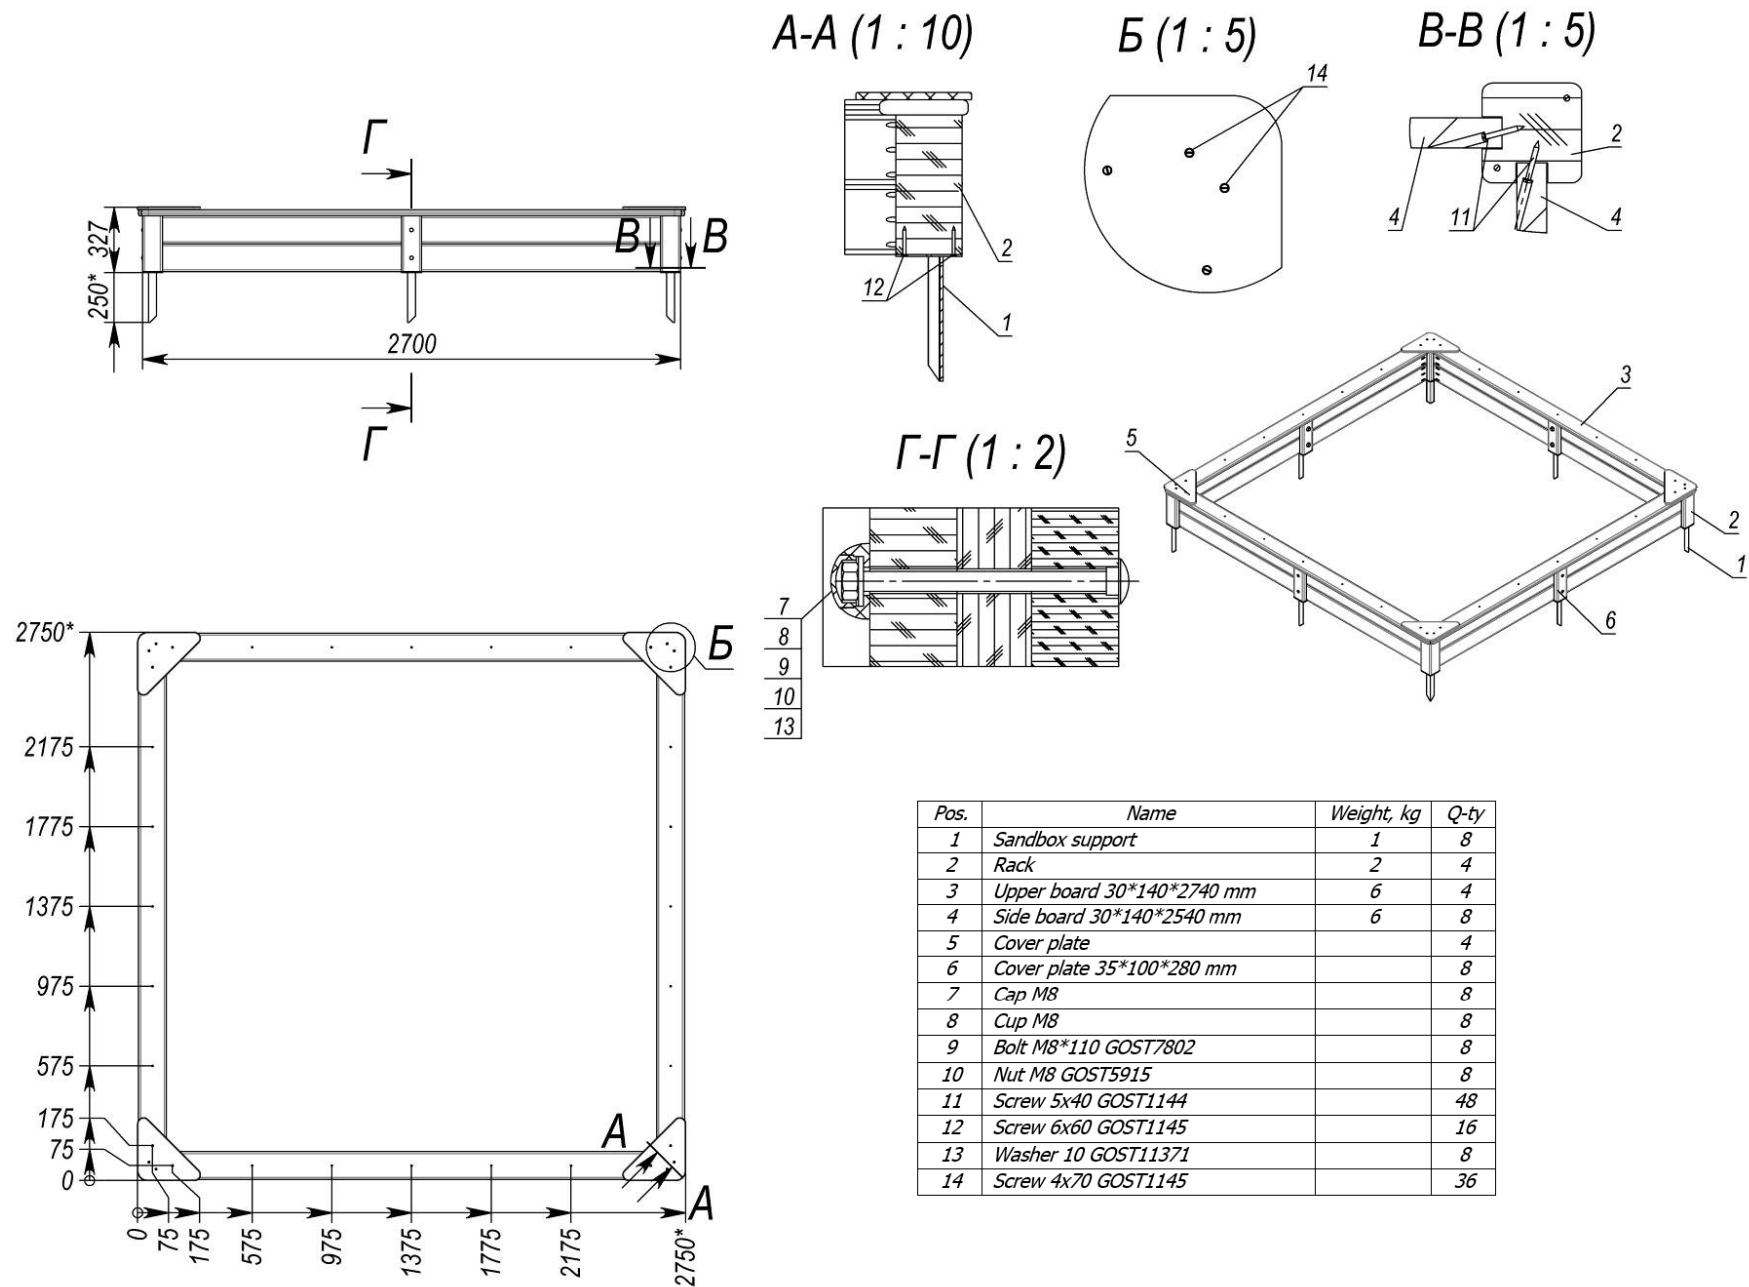



Picture 8 – for TE334-2.7

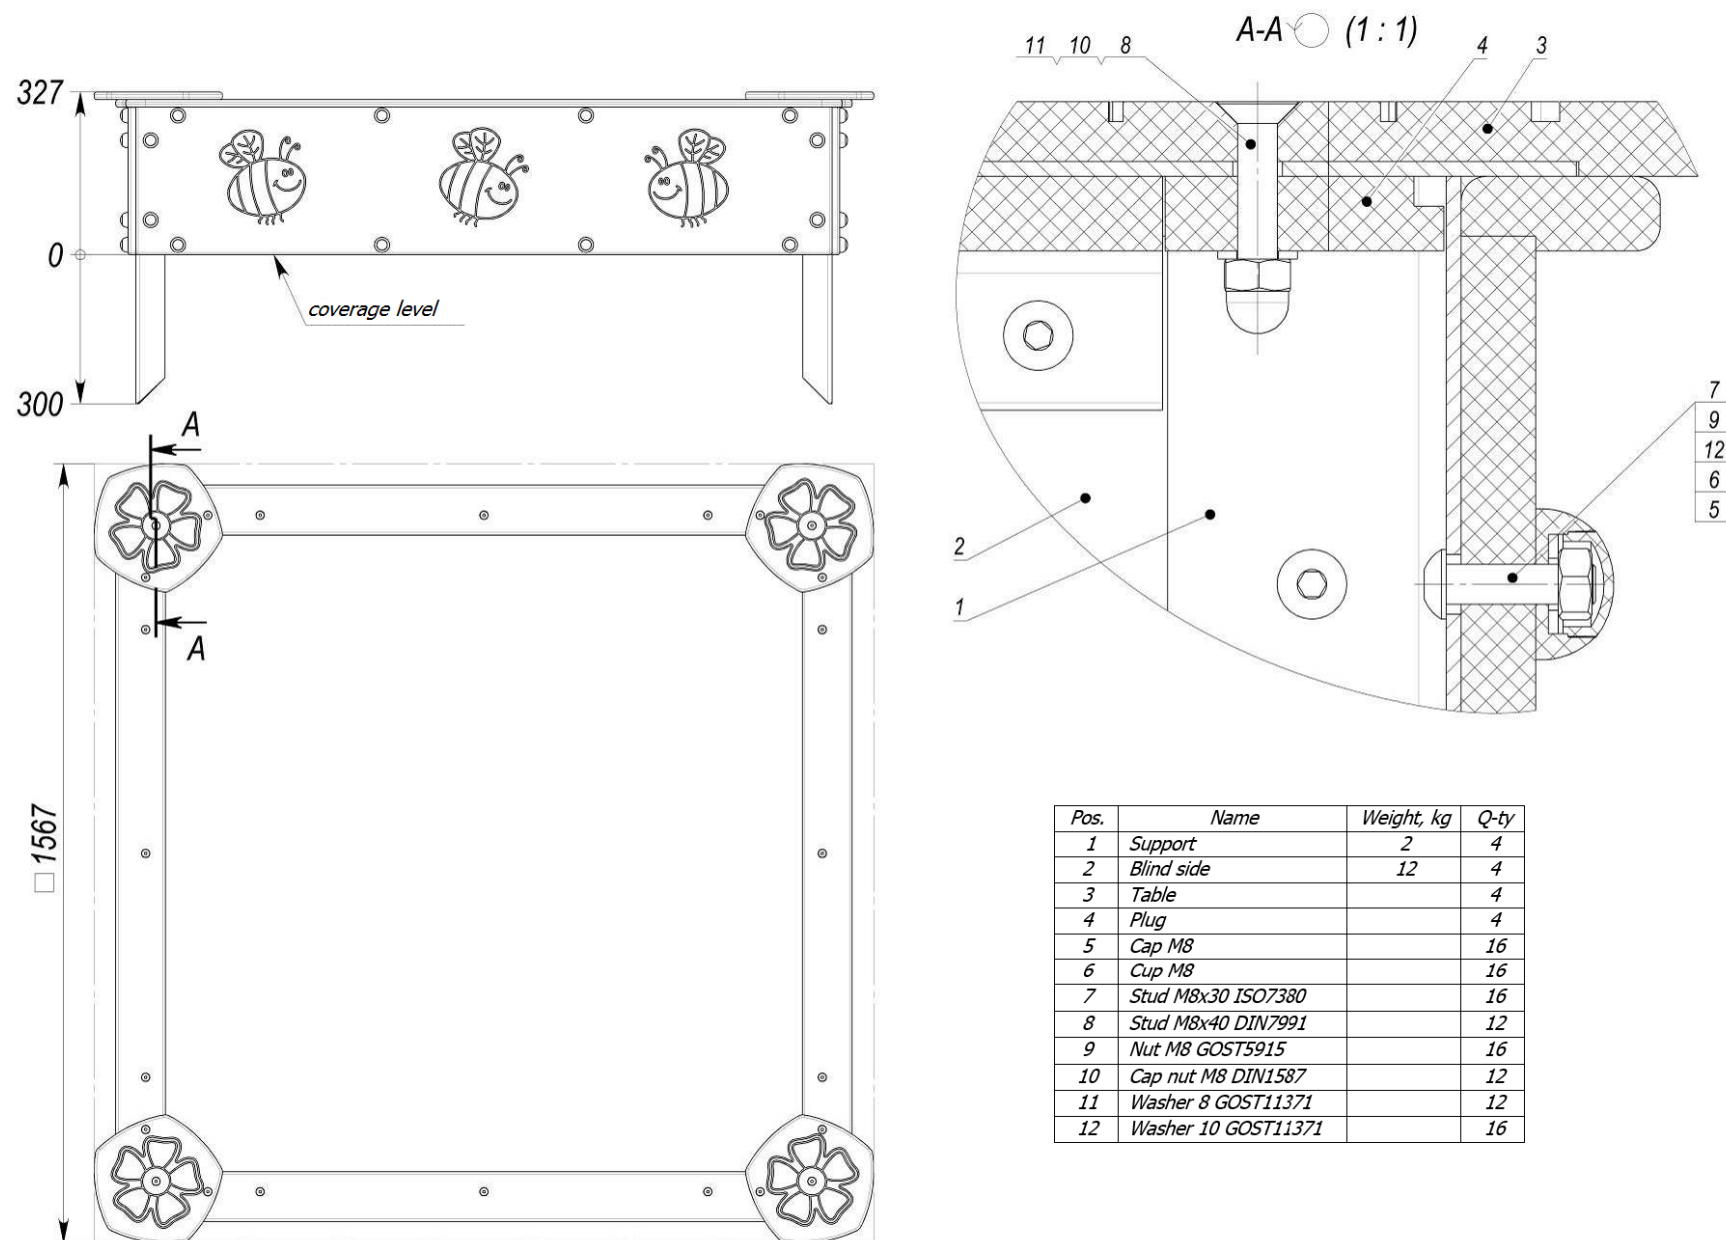

Picture 9 – for TE338

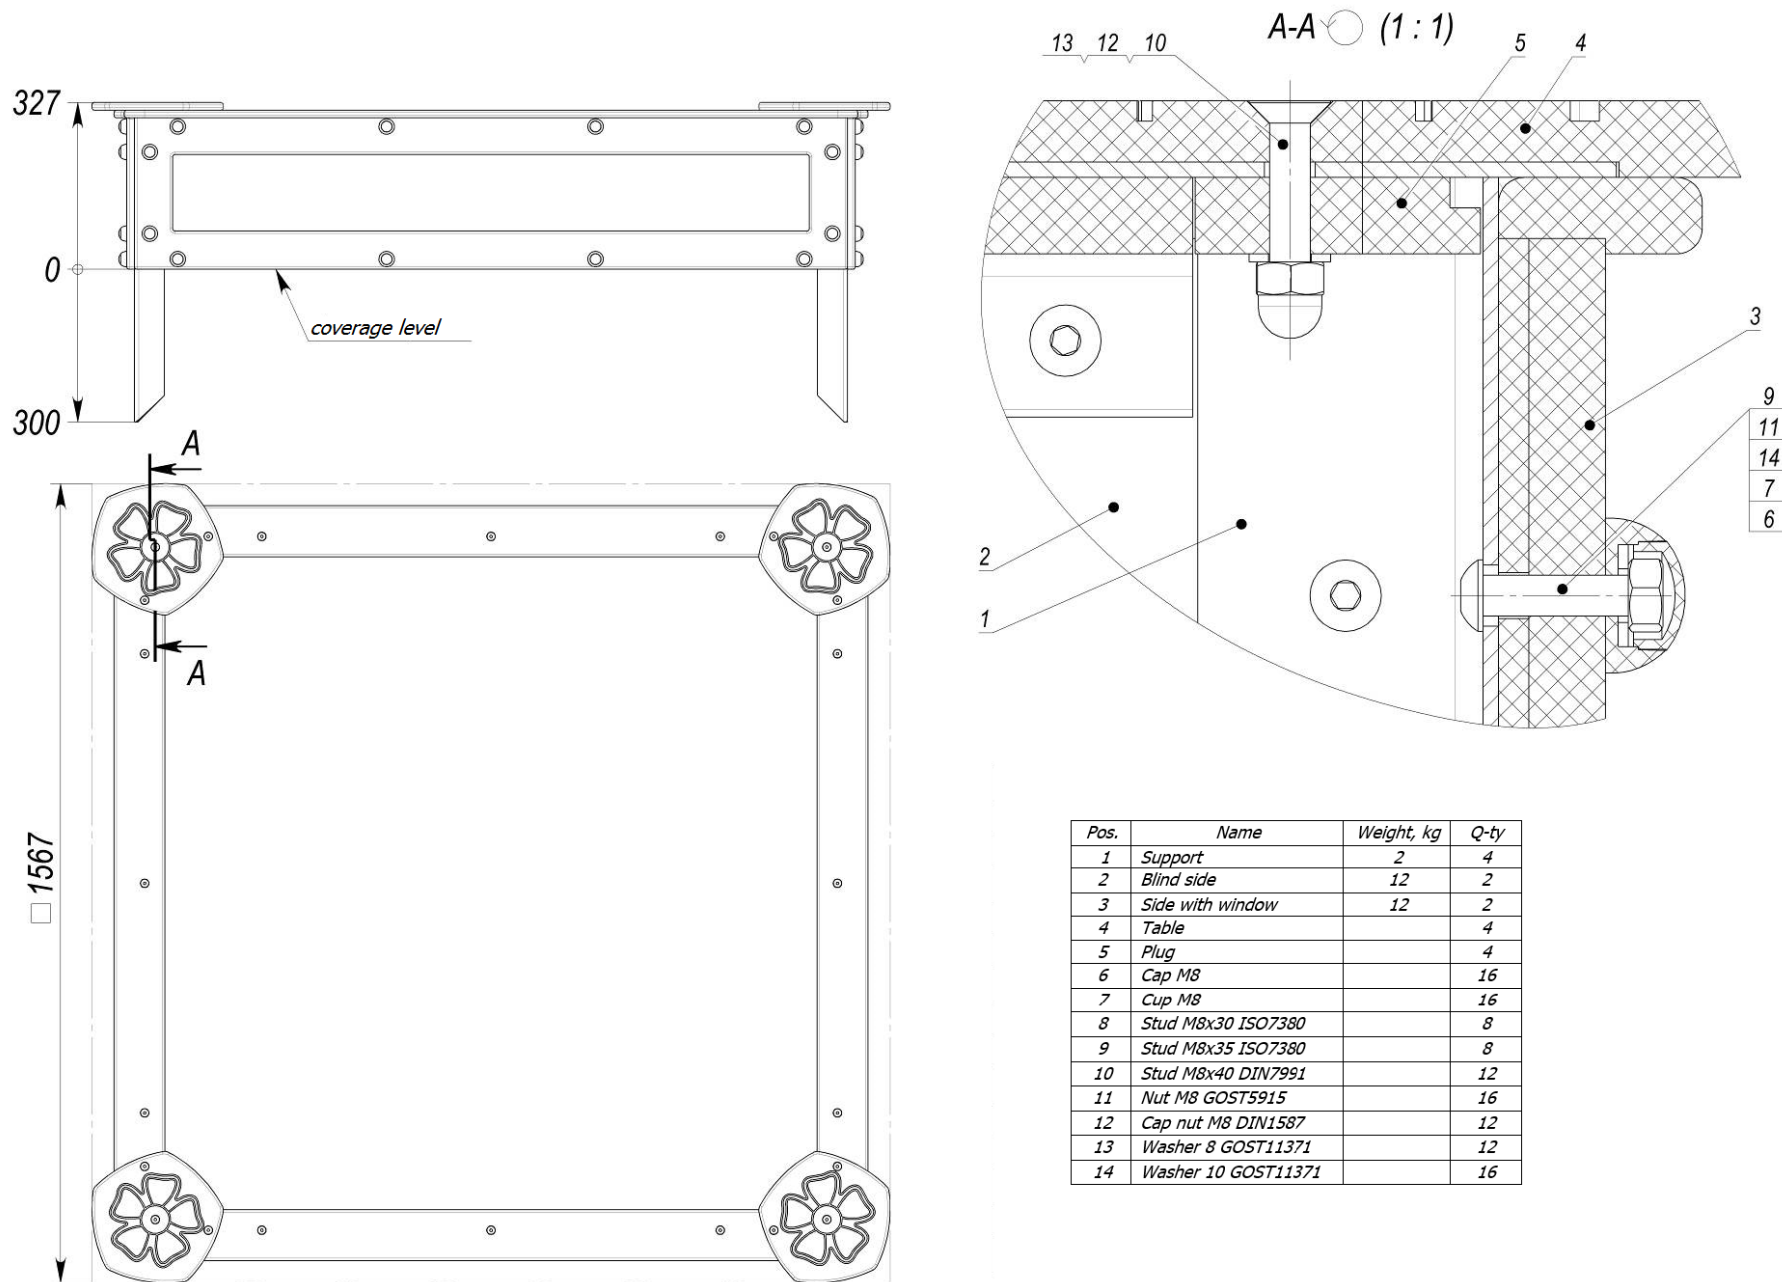

Picture 10 – for TE338.1

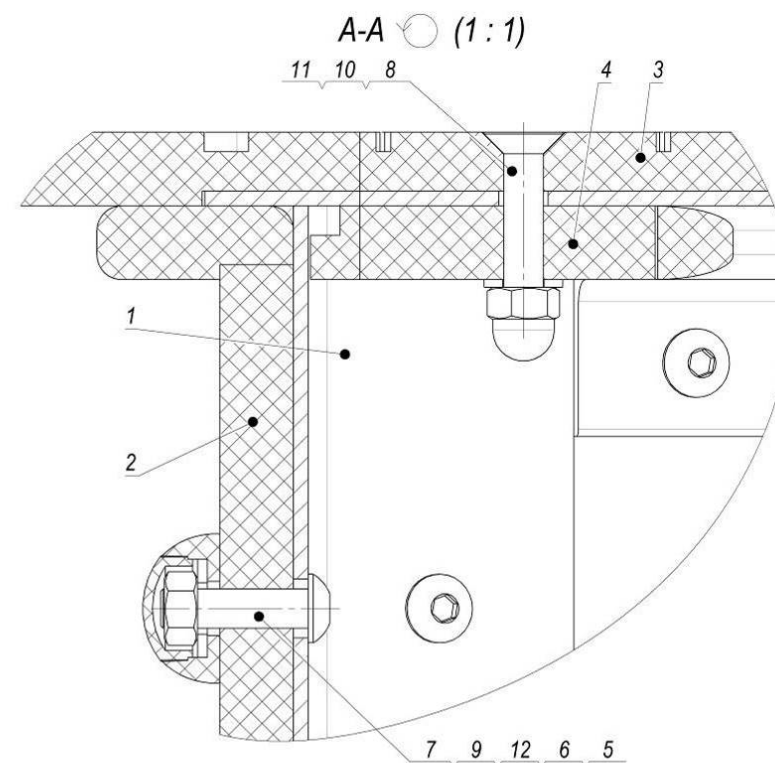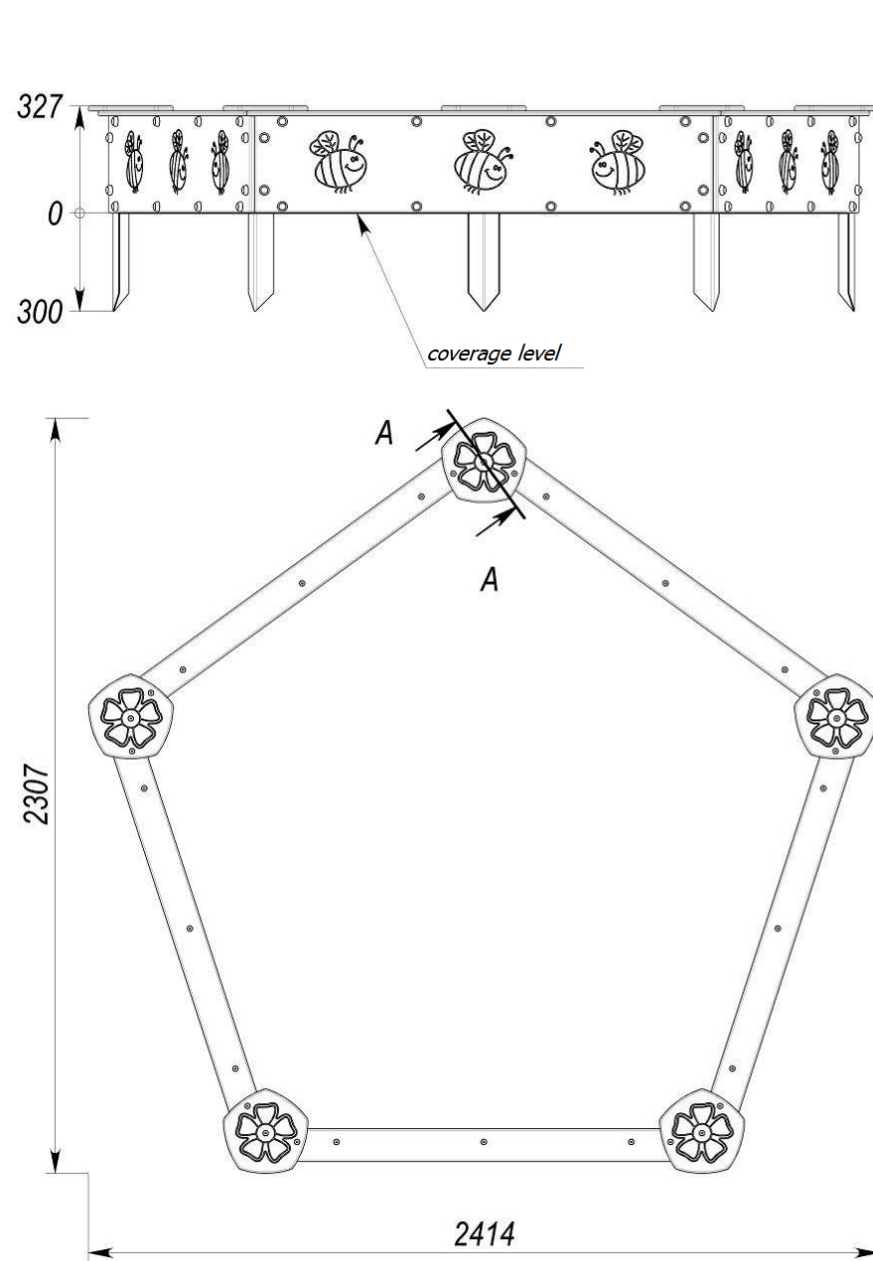

Pos.	Name	Weight, kg	Q-ty
1	Support	2	5
2	Board	12	5
3	Table		5
4	Plug		5
5	Cap M8		20
6	Cup M8		20
7	Stud M8x30 ISO7380		20
8	Stud M8x40 DIN7991		15
9	Nut M8 GOST5915		20
10	Cap nut M8 DIN1587		15
11	Washer 8 GOST11371		15
12	Washer 10 GOST11371		20

Picture 11 – for TE339