


DATA SHEET

Playground complex "Transport mini" T922.2

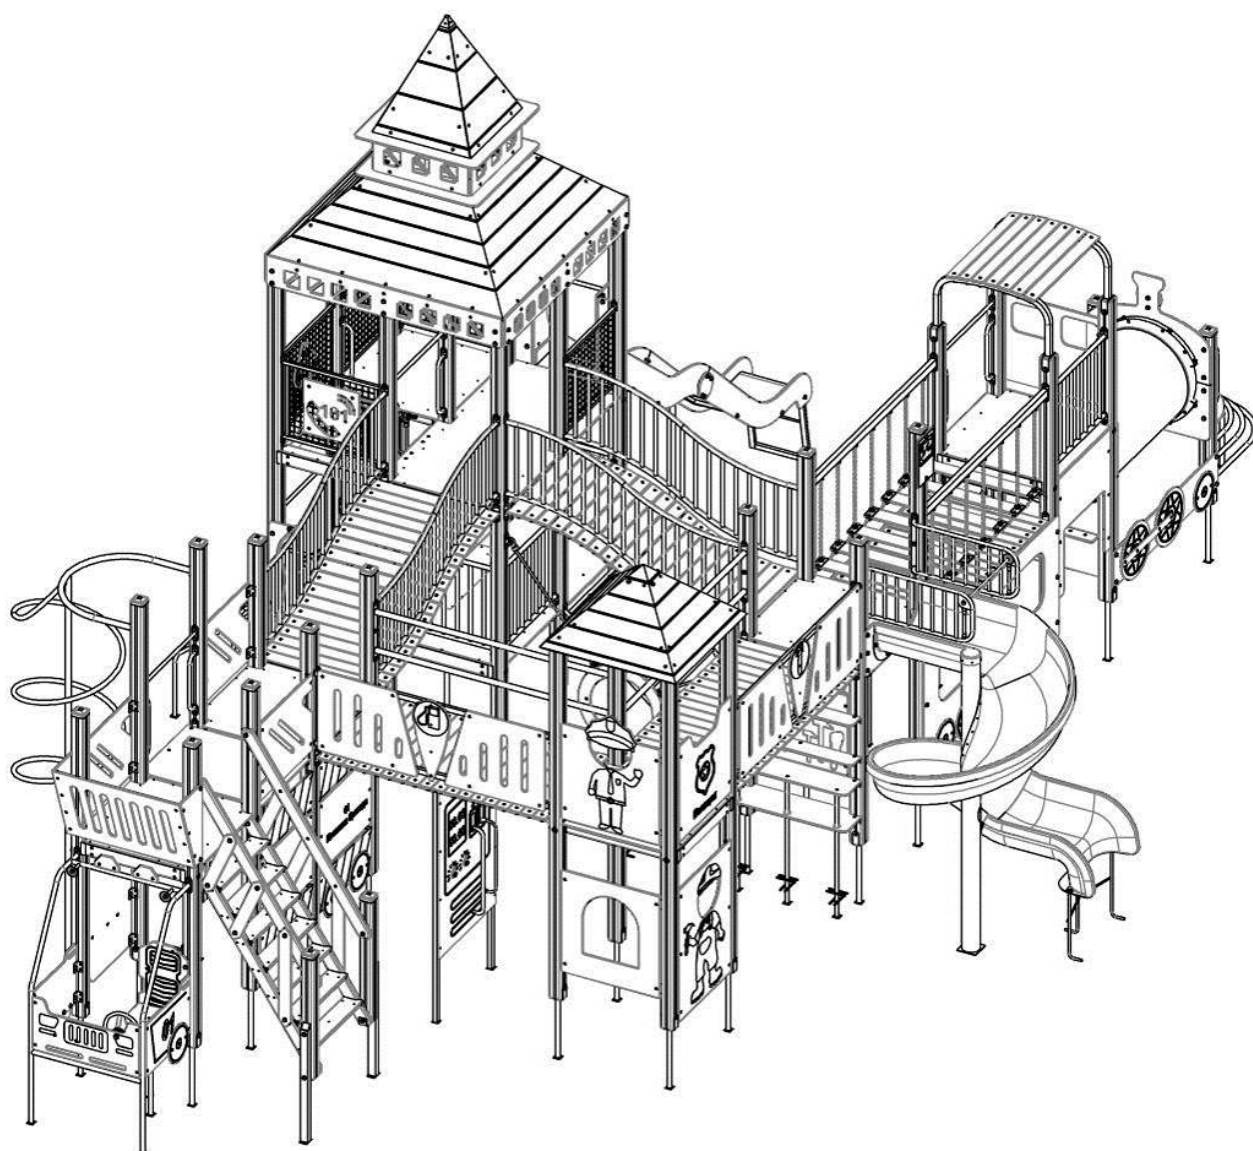

CONTENT

1. GENERAL INFORMATION	Ошибка! Закладка не определена.
2. PROCEDURE FOR ASSEMBLING AND INSTALLING THE PRODUCT	Ошибка! Закладка не определена.
3. PRODUCT USE	Ошибка! Закладка не определена.
4. PRODUCT MAINTENANCE	Ошибка! Закладка не определена.
5. INFORMATION ON STORAGE, TRANSPORT AND DISPOSAL	Ошибка! Закладка не определена.
6. TECHNICAL CHARACTERISTICS AND ASSEMBLY SCHEMES	5

FOR NOTES

[illegible]

1. GENERAL INFORMATION

Purpose and content of this document. This document contains a general description of the equipment, information on installation, intended use, maintenance, current repair and manufacturer's warranty.

Distribution of this document for product modifications. The manufacturer can make changes to the design of the product, aimed at improving its characteristics, changing the design, etc. This document may not contain a description of such changes, but applies to such modified products.

2. PROCEDURE FOR ASSEMBLING AND INSTALLING THE PRODUCT

Tools and accessories. The product does not include the tools required for assembly and installation.

Product assembly and installation procedure.

- 1) Mark the area as indicated on the layout of the playground foundations.
- 2) Excavate recesses to install embedded parts and attachment elements. Level the depth of the recesses by deepening them or sprinkling crushed stone.
- 3) Assemble and install the equipment in accordance with the assembly schemes – chapter 7.
- 4) Concrete the embedded parts and supporting structures of the attachment elements. During installation the product on sandy soil the overall dimensions of the recesses should be increased by 15-20%.
- 5) Arrange the impact-absorbing coating area.

3. PRODUCT USE

Do not use the product until it has been fully and completely installed.

The product should not be used by users of a different age category.

Do not use the product by users of a different weight category.

Before using the product, clear the safety area from unnecessary objects that may cause harm to the user (debris, tools left after assembly and installation, etc.).

Do not use the product in adverse weather conditions (ice, snow, rain, hail, strong winds, etc.), which may cause injury to the user.

4. PRODUCT MAINTENANCE

You have purchased high-quality and reliable equipment. In the process of its production, the requirements of regulatory and technical documents of Ukraine, the CIS countries and the European Union regulating the production of children's gaming equipment were taken into account. However, it should not be forgotten that when operating any technical product, certain rules and requirements must be followed. Despite the fact that our product is of high quality and reliability, this rule applies to it in full. You should be aware that the implementation of the following rules and recommendations for product maintenance is aimed at ensuring that your child, the child of your friends or acquaintances is safe and no unforeseen factors threaten his health, life.

Remember that the operation of the product is accompanied by the influence of various negative factors on it, a complete list of which cannot be predicted. Among them, an important place is occupied by natural factors and factors caused by human influence on equipment. As a rule, their action initially leads to disruptions in the appearance of the product. Thus, under the influence of factors caused by the exploitation of a person, there may be damage to the integrity of the paint coating of parts made of wood, in the form of scuffs, chips, incisions, and when exposed to parts made of metal, damage to the paint coating in the form of nicks, chips, abrasion, etc. This leads to the emergence and development of defects that can be the cause of the destruction of the product. The product is particularly dangerous if it is used for other than its intended purpose, if the permissible loads are exceeded, or if vandalism occurs, as these factors can cause irreversible changes in the structure of the material from which the product is made, leading to destruction.

The maintenance of the product implies, first of all, the responsibility of the user to comply with all recommendations provided in this document, starting with a daily inspection of the external condition of the product before operation.

Daily inspection of the product is a very important procedure. With its help, you can timely detect any changes in the appearance of the product (deformation of individual parts, deformation of the structure as a whole or part of it, damage to parts, cracks of welds, as well as the absence of fastening of parts of the product, etc.).

Before using the product, check its operability, absence of damage, dirt on the product, sharp edges, reliability of fixing the structure, absence of unnecessary objects on the surface of the site. If the product is damaged, fully or partially inoperable, or has any other defects, do not use it.

During operation it is also necessary to inspect the condition of the product periodically - the current inspection. It includes an external inspection of the product, checking its operability (in the presence of moving elements - the smoothness of the movement of mechanisms, compliance with operating modes, etc.). Current inspection allows you to detect malfunctions caused by the operation of equipment, climatic conditions, acts of vandalism and other factors, until they reach a critical level and the destruction of the product. The current inspection is carried out in order to detect foreign objects that may threaten the user and lead to violations of the functioning of the product. The frequency of the current inspection is set by the owner taking into account the operating conditions. If you do not have sufficient technical knowledge and skills to conduct such inspections, we recommend you to contact the authorized specialists of the manufacturer in order to obtain advice.

Every three months, a scheduled inspection should be carried out, which primarily concerns the foundation part, load-bearing elements and connection nodes of elements (their integrity and degree of deterioration).

The main annual inspection must be carried out annually by authorised specialists of the manufacturer. During the inspection, the technical condition of the equipment shall be assessed for compliance with safety requirements. The degree of deterioration and damage to wooden elements and their ability to withstand the applied loads, damage, corrosion of metal elements and the impact of these factors on the safety of the product are determined. The inspection also helps to identify the impact of repairs, if any, on the safety of the equipment.

Based on the results of the inspection, a maintenance procedure is carried out to eliminate the identified discrepancies in the product's operation. This procedure includes assessing the condition of parts and assemblies, replacing worn parts, and restoring the integrity of protective coatings. The results of the inspections, as well as the procedures carried out as a result of the inspection and maintenance of the product must be properly documented in the Registration Journal, which is an integral part of this passport. The owner of the product must keep the acts of maintenance of the product, acts of repair work.

5. INFORMATION ON STORAGE, TRANSPORT AND DISPOSAL

The product is transported in the manufacturer's packaging by any means of transport that ensures its safety and protection from external factors (rain, snow, sunlight, water, high humidity, etc.).

Information about transportation

Date		Brand, state number of the ca/trailer	Position, full name	Signature
Departure	Arrival			

Before installation, store the product in the original packaging in dry, closed rooms with natural air ventilation.

If it is necessary to transport the product to another location after use, it is recommended to use the manufacturer's packaging.

If long-term storage of the product is required, the following storage rules must be observed (the list of conditions is not complete):

- place the product in a closed dry room with natural ventilation;
- protect the product from external factors (dust, water drops, etc.) with a large plastic bag, leaving space for free air circulation;

- take other measures to preserve the appearance and characteristics of the product during storage.

When removing the product from storage and preparing for installation, follow the next recommendations:

- remove the product from the packaging material (polyethylene, cardboard, other packaging materials);
- remove dust and other contaminants from the surface of the product;
- check completeness and absence of parts damages.

Storage information

Date		Product storage conditions	Full name	Signature
Putting into storage	Removal from storage			


After the end of the equipment's service life, the buyer independently determines the procedure for its use. If you decide to recycle, contact the seller or specialized organizations.

The equipment does not contain harmful impurities and materials that can harm your health and is not subject to special recycling.


6. TECHNICAL CHARACTERISTICS AND ASSEMBLY SCHEMES

Length, mm
Width, mm
Height, mm
Weight, kg
Free height of fall, mm
Age restrictions, years
Weight restrictions, kg


11904
7379
5369
2273
2029
from 7 to 12
Up to 60

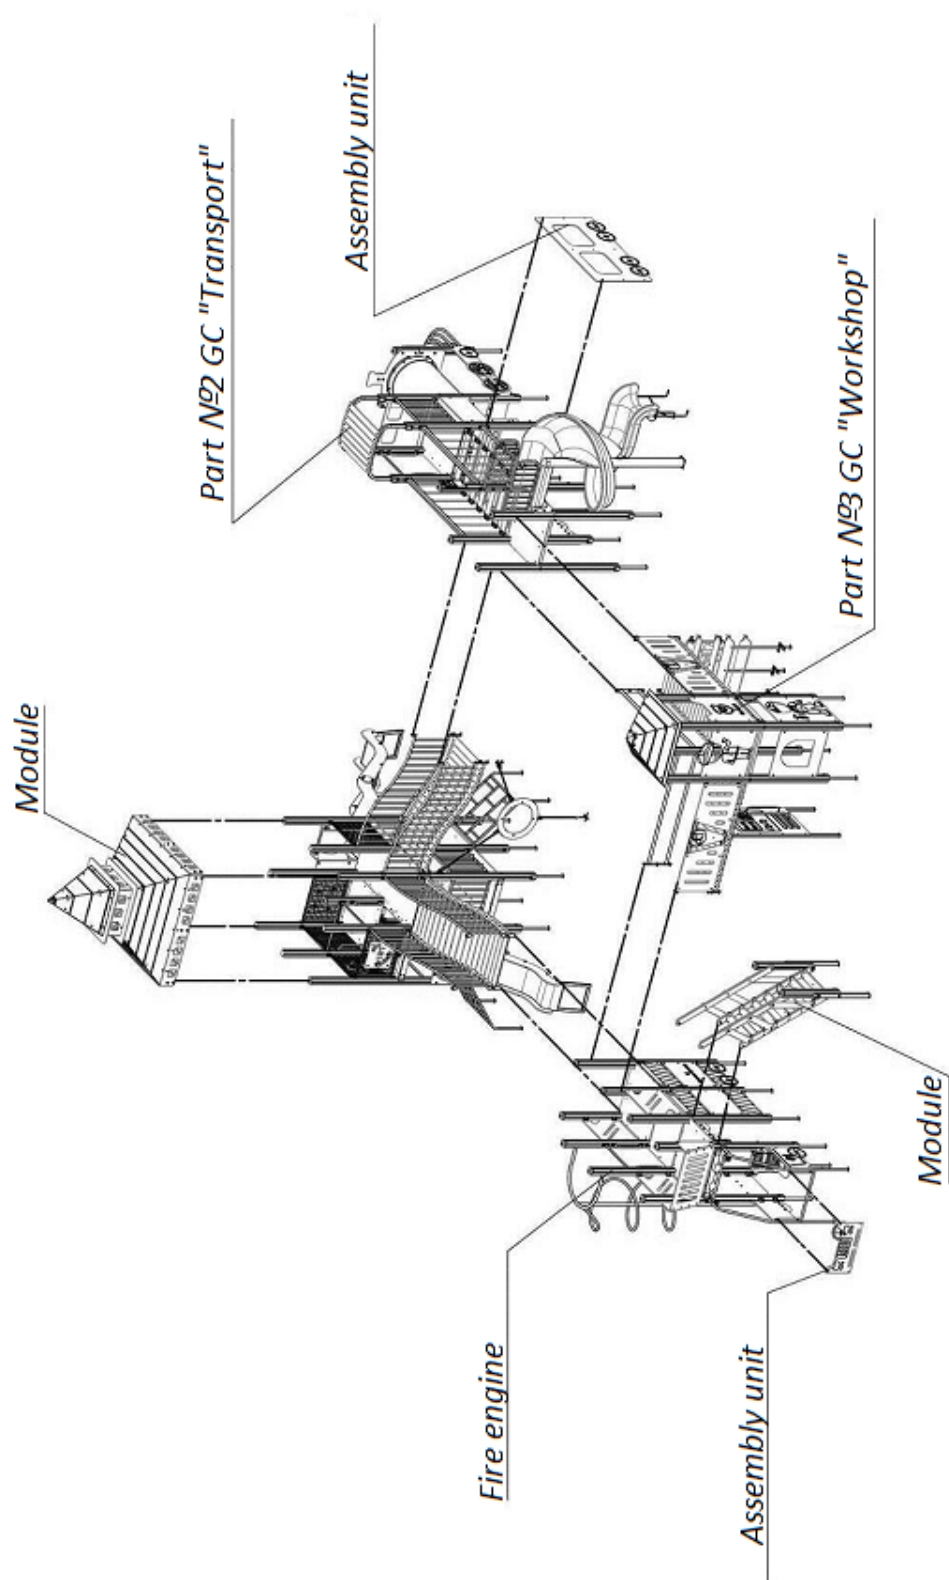


Picture 1 – Dividing of the game complex into parts

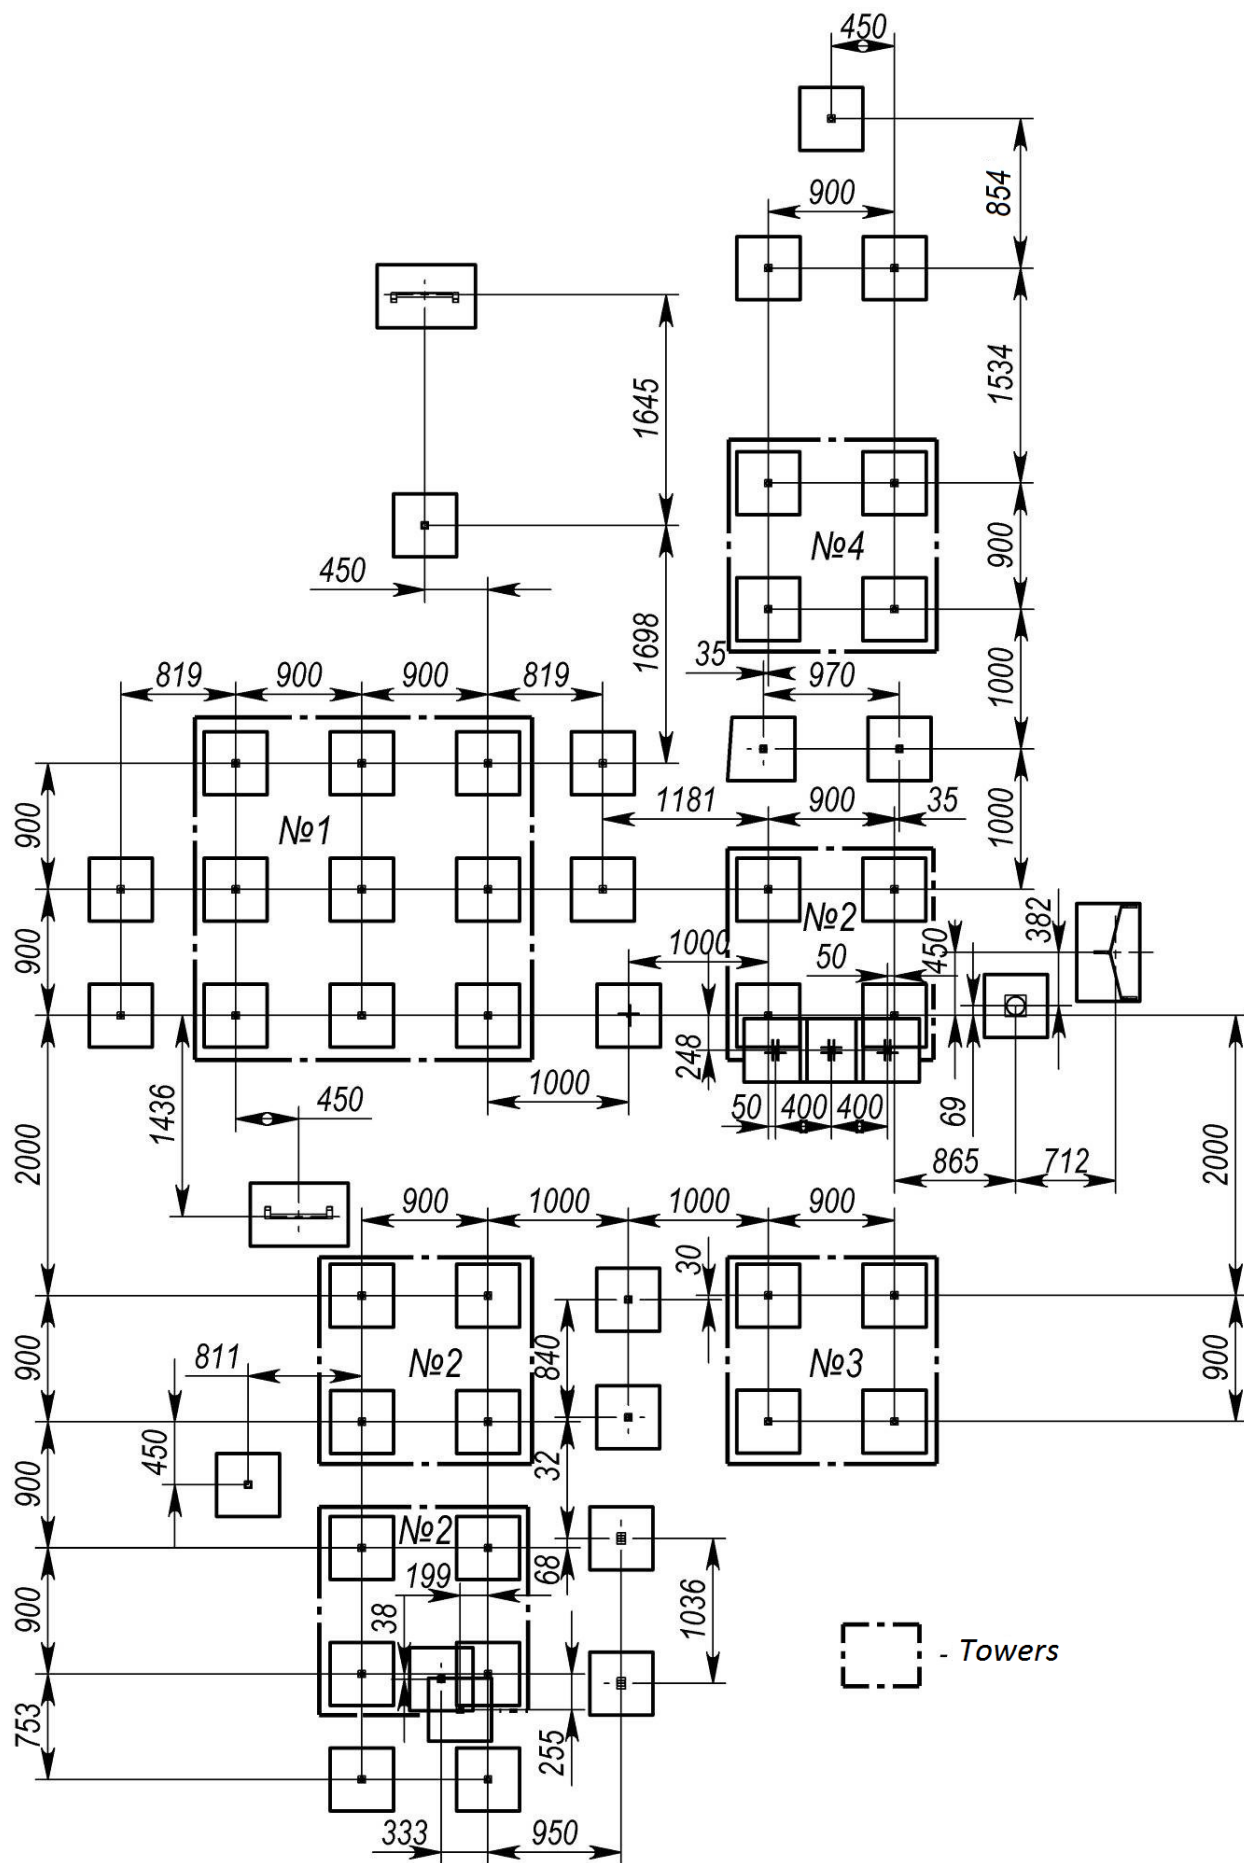


Picture 3 – Layout of foundations

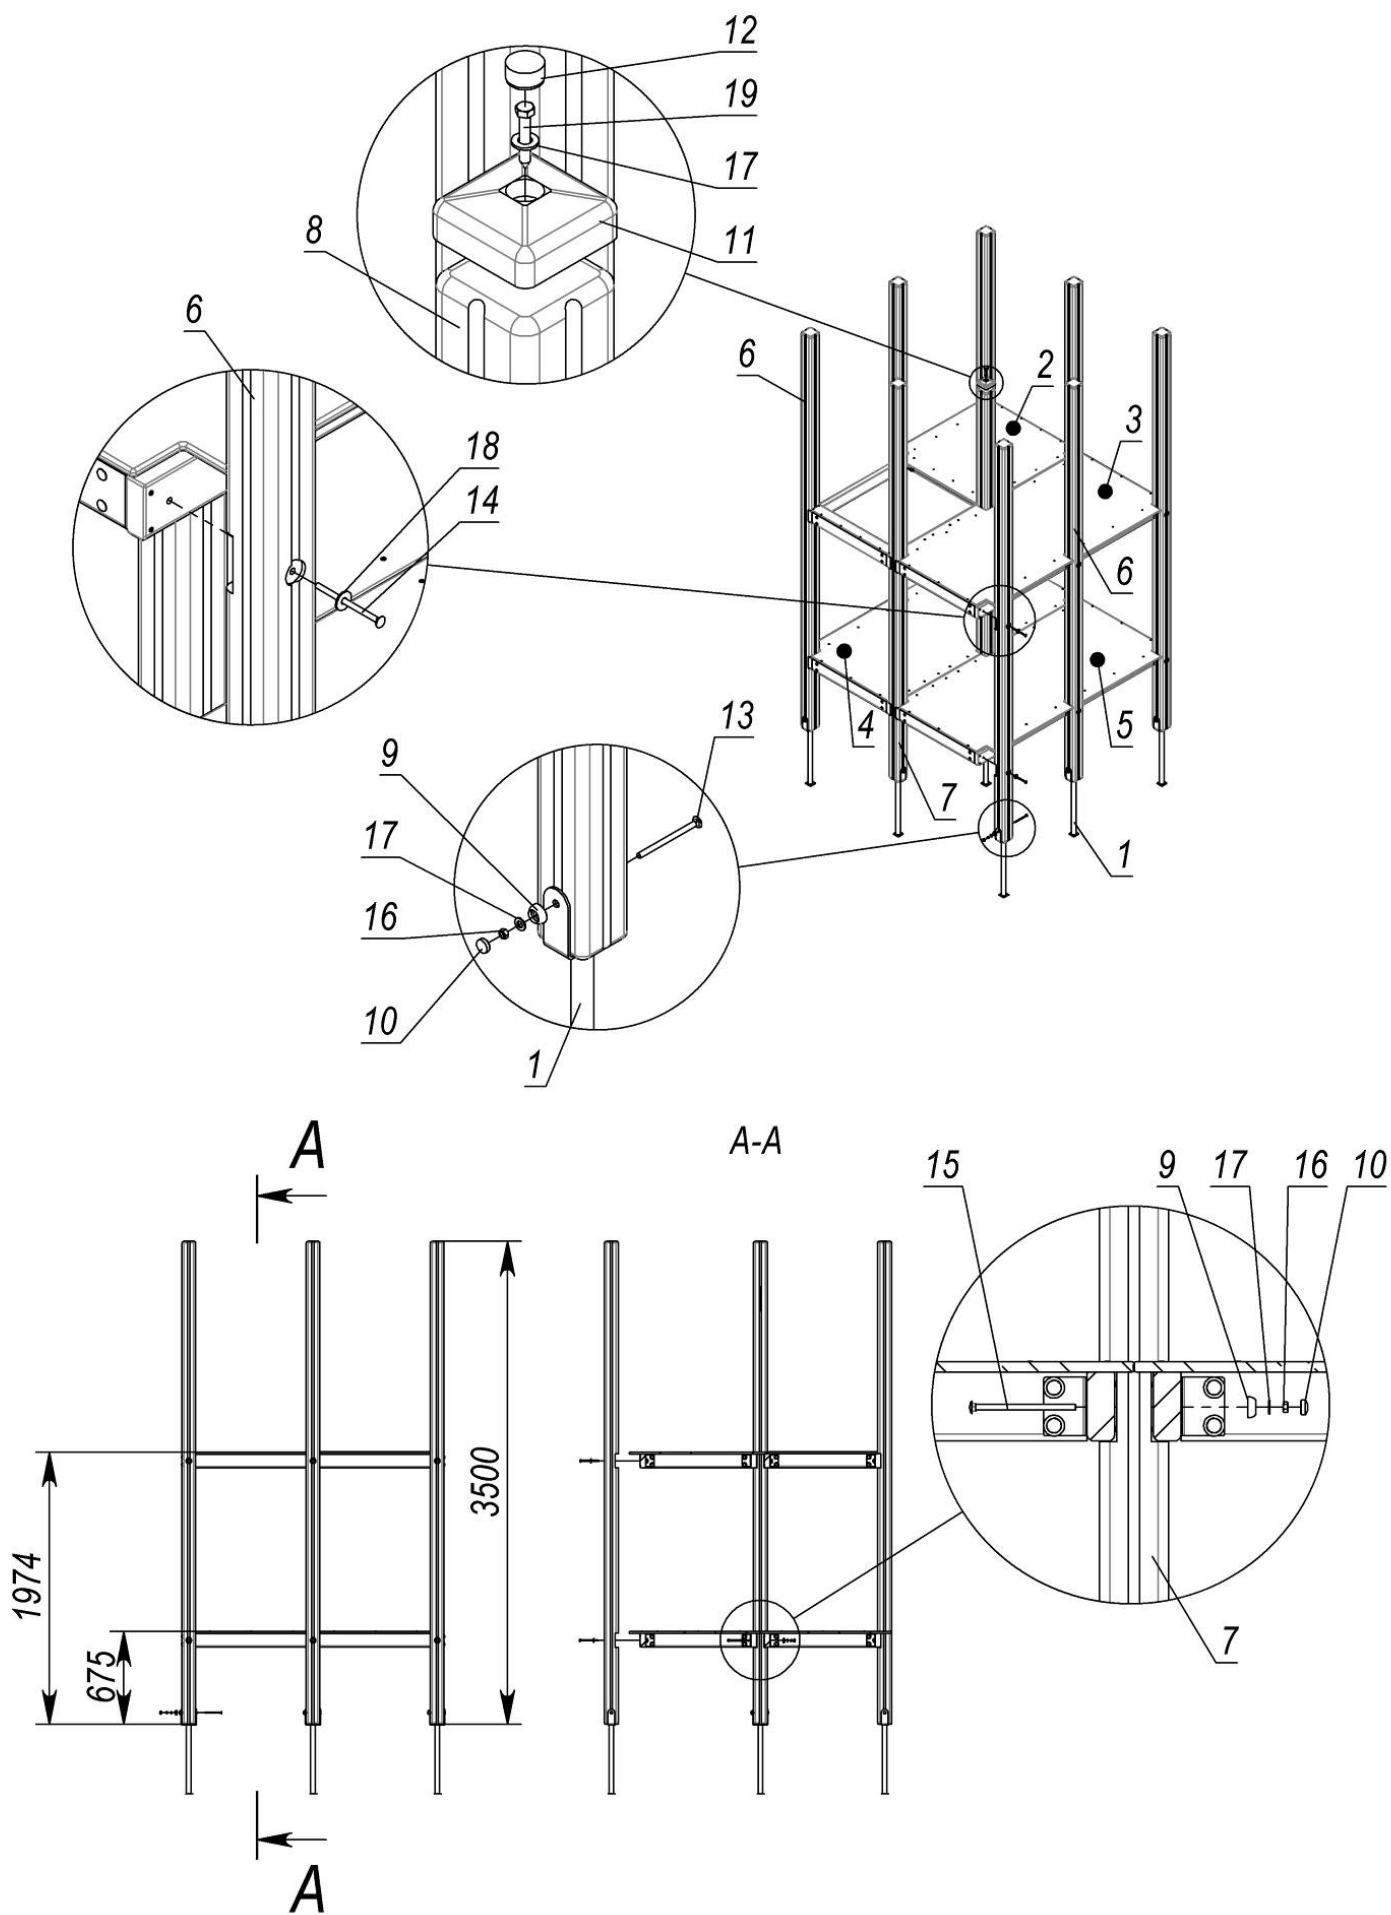


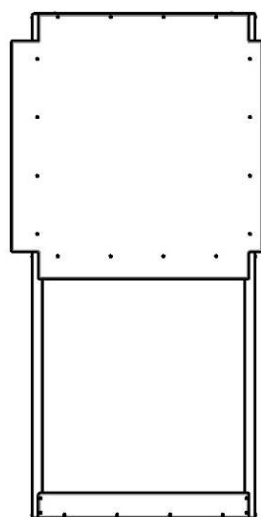


Pos.№2

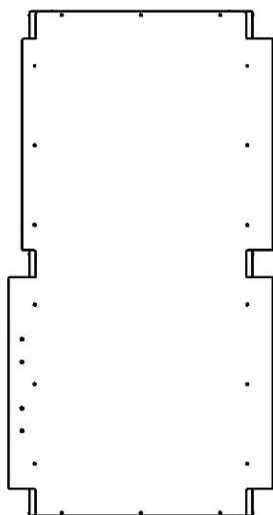

Pos.№3

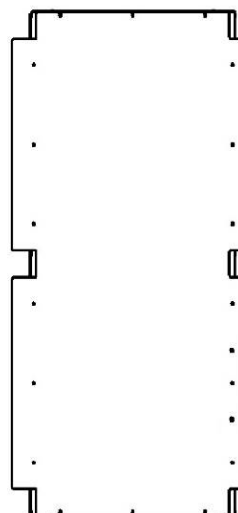



Pos.№4

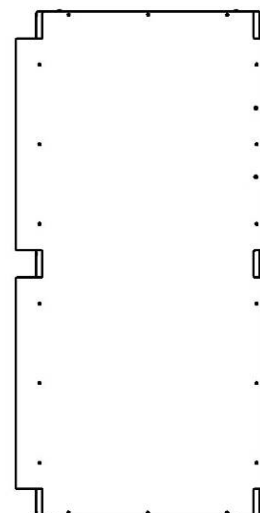

Pos.№5


<i>Pos.</i>	<i>Name</i>	<i>Weight, kg</i>	<i>Q-ty</i>
<i>1</i>	<i>Beam support</i>	<i>2</i>	<i>9</i>
<i>2</i>	<i>Double site with cut</i>	<i>25</i>	<i>1</i>
<i>3</i>	<i>Double site</i>	<i>34</i>	<i>1</i>
<i>4</i>	<i>Double site</i>	<i>34</i>	<i>1</i>
<i>5</i>	<i>Double site</i>	<i>34</i>	<i>1</i>
<i>6</i>	<i>Beam (3.5m)</i>	<i>20</i>	<i>6</i>
<i>7</i>	<i>Middle beam (3.5m)</i>	<i>20</i>	<i>2</i>
<i>8</i>	<i>Rack</i>	<i>17</i>	<i>1</i>
<i>9</i>	<i>Cup M8</i>		<i>27</i>
<i>10</i>	<i>Cap M8</i>		<i>27</i>
<i>11</i>	<i>Cap</i>		<i>1</i>
<i>12</i>	<i>Cap</i>		<i>1</i>
<i>13</i>	<i>Bolt M8x120 GOST7802</i>		<i>9</i>
<i>14</i>	<i>Bolt M8x130 GOST7802</i>		<i>12</i>
<i>15</i>	<i>Bolt M8x150 GOST7802</i>		<i>6</i>
<i>16</i>	<i>Nut M8 GOST5915</i>		<i>27</i>
<i>17</i>	<i>Washer 10 GOST11371</i>		<i>28</i>
<i>18</i>	<i>Washer 10 GOST6958</i>		<i>12</i>
<i>19</i>	<i>Screw 8x50 GOST11473</i>		<i>1</i>

Picture 4 – Completeness and assembly scheme of central tower. Marked under №1 in the picture 3

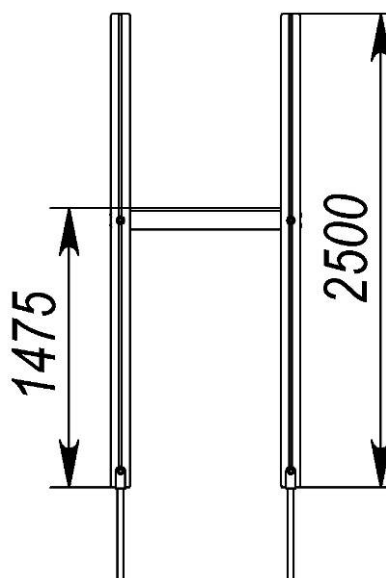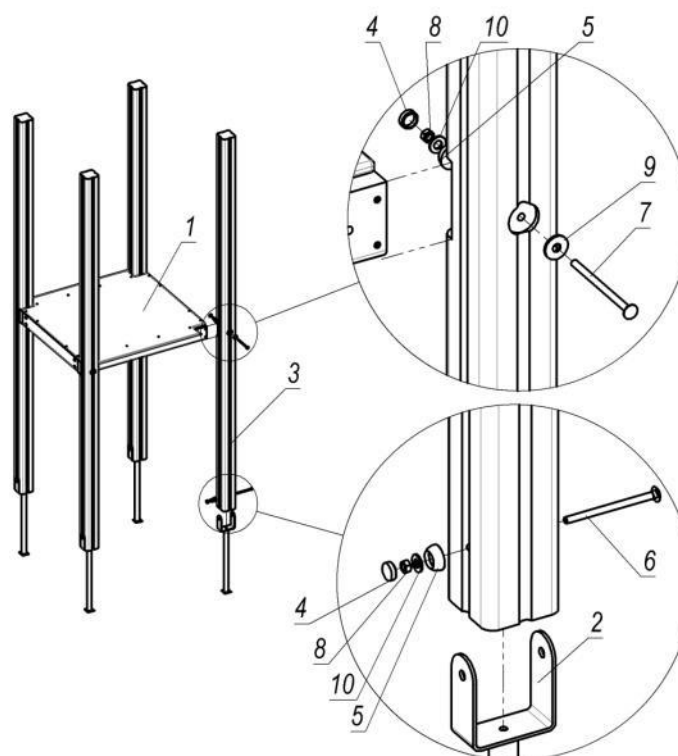


<i>Pos.</i>	<i>Name</i>	<i>Weight, kg</i>	<i>Q-ty</i>
1	Site	19	1
2	Beam support	2	4
3	Beam	17	4
4	Cap M8		8
5	Cup M8		8
6	Bolt M8x120 GOST7802		4
7	Bolt M8x130 GOST7802		4
8	Nut M8 GOST5915		8
9	Washer 10 GOST6958		4
10	Washer 10 GOST11371		8

**Picture 5 – Completeness and assembly scheme of tower 1,5m
(1,5 m is the height from site to ground level). Marked under №4 in the picture 3**

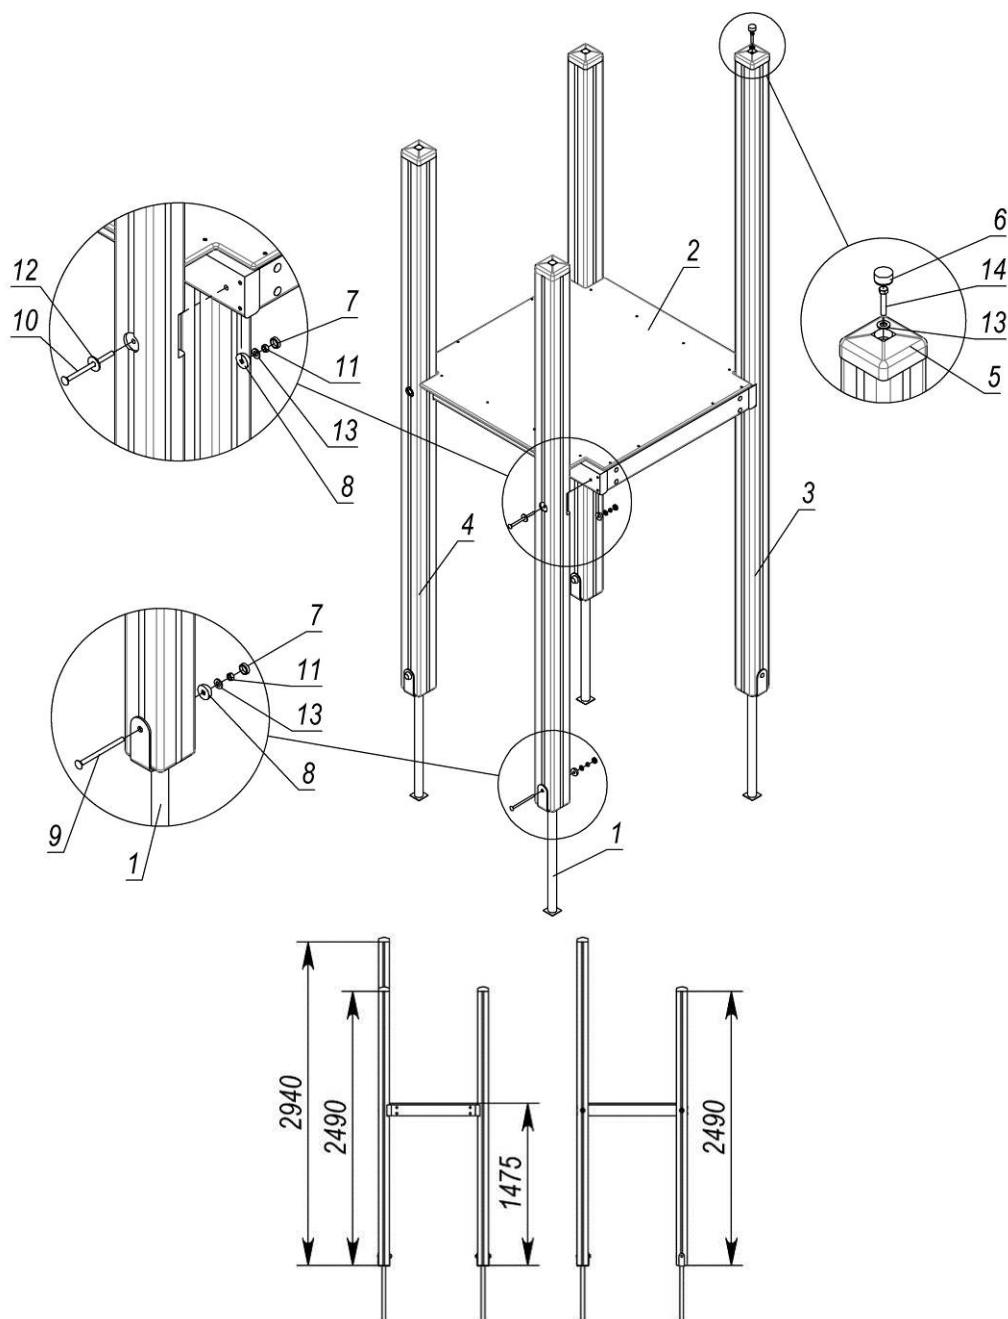


Pos.	Name	Weight, kg	Q-ty
1	Beam support	2	4
2	Site	19	1
3	Beam	17	1
4	Beam	15	3
5	Cap		4
6	Cap		4
7	Cap M8		8
8	Cup M8		8
9	Bolt M8x120 GOST7802		4
10	Bolt M8x130 GOST7802		4
11	Nut M8 GOST5915		8
12	Washer 10 GOST6958		4
13	Washer 10 GOST11371		12
14	Screw 8x50 GOST11473		4

Picture 6 – Completeness and assembly scheme of tower 1,5m. Marked under №2 in the picture 3

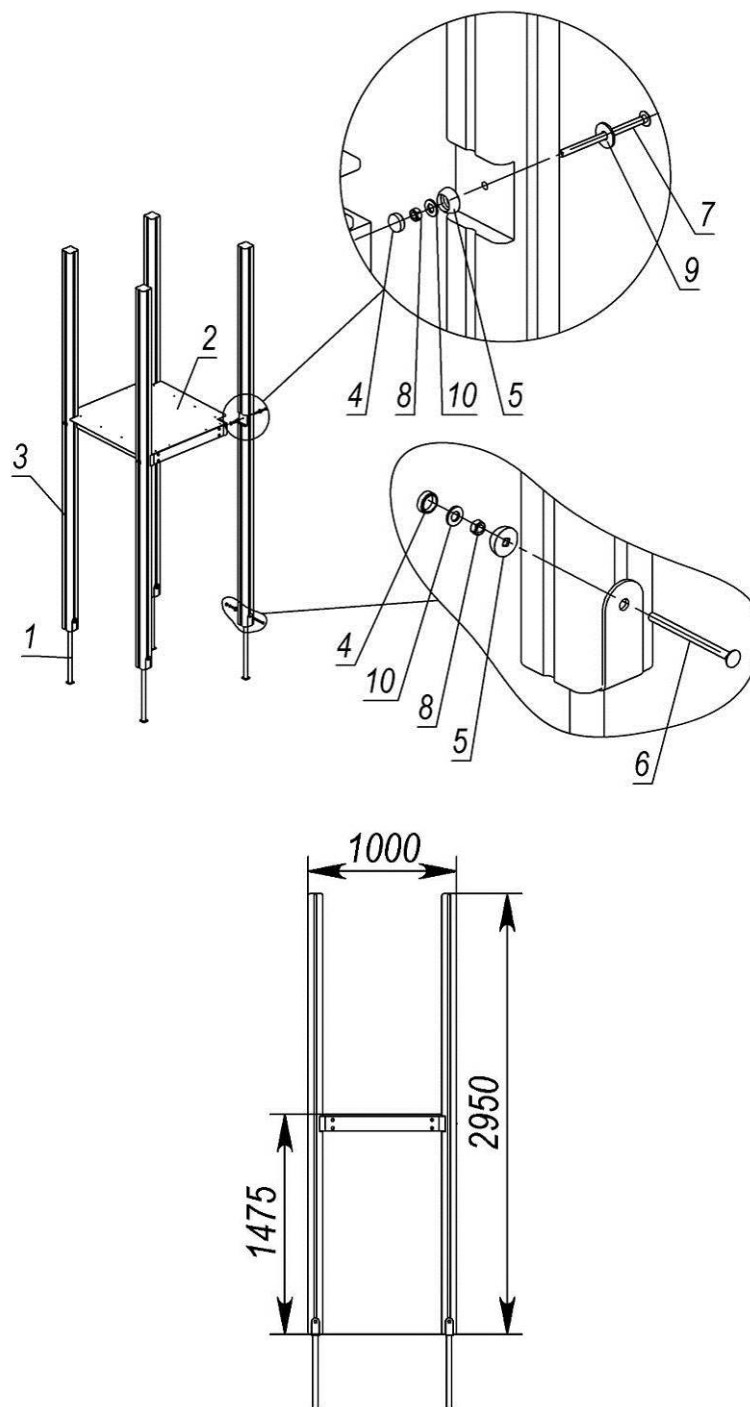


<i>Pos.</i>	<i>Name</i>	<i>Weight, kg</i>	<i>Q-ty</i>
1	Beam support	2	4
2	Site	19	1
3	Beam	20	4
4	Cap M8		8
5	Cup M8		8
6	Bolt M8x120 GOST7802		4
7	Bolt M8x130 GOST7802		4
8	Nut M8 GOST5915		8
9	Washer 10 GOST6958		4
10	Washer 10 GOST11371		8

Picture 7 – Completeness and assembly scheme of tower 1,5m. Marked under №3 in the picture 3

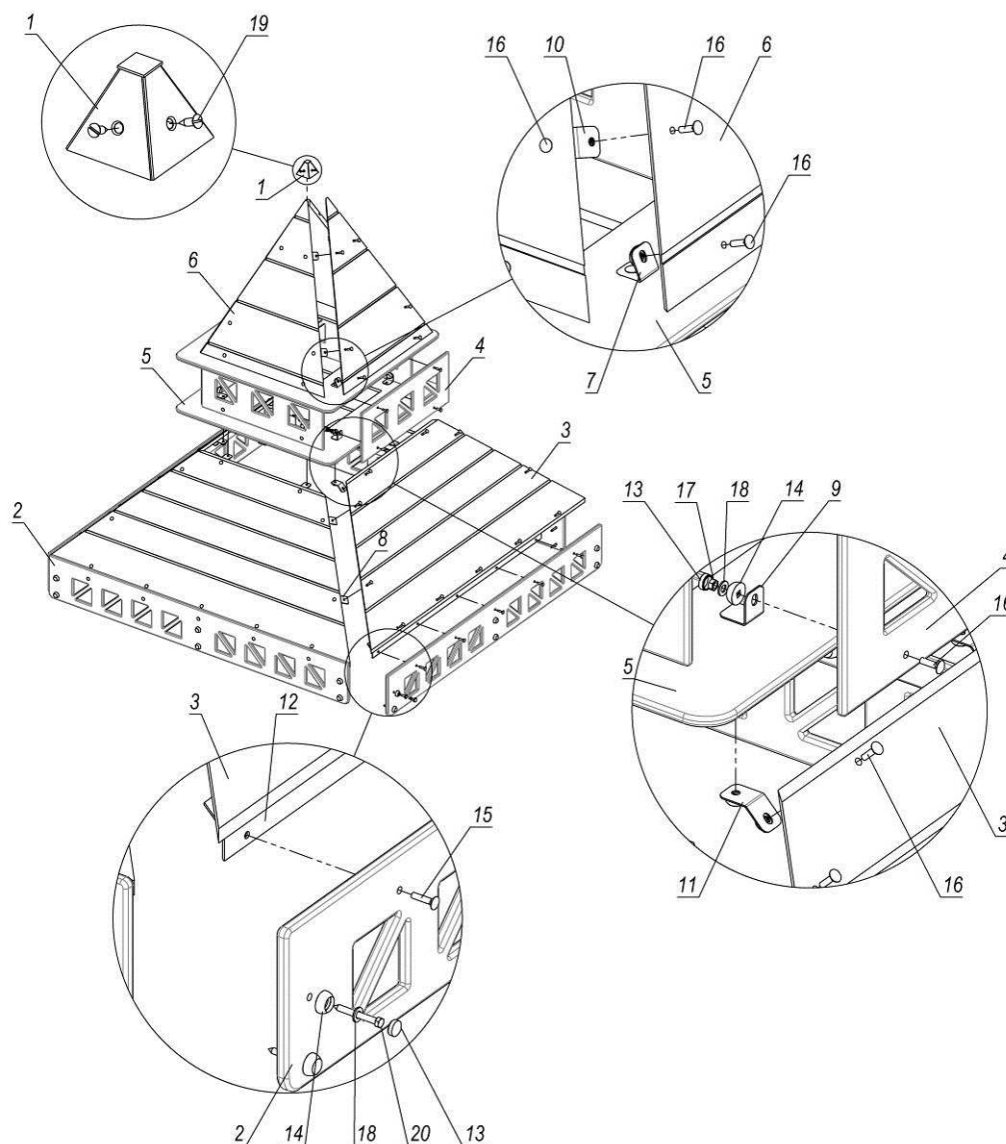


Pos.	Name	Weight, kg	Q-ty	Note
1	Connector		1	Red
2	Roof rim	5	4	Red
3	Slope (T922)	12	4	Grey
4	Adapter	2	4	Red
5	Upper lap	8	2	White
6	Slope	4	4	Red
7	Plate (angle 67 degrees)		8	Brown
8	Plate		8	Brown
9	Angle 45x45x40 (90 degrees)		16	Brown
10	Plate		8	Brown
11	Plate		8	Brown
12	Angle bar (1.5m)	3	4	Brown
13	Cap M8		144	Yellow
14	Cup M8		144	Yellow
15	Bolt M8x35 GOST7802		20	
16	Bolt M8x30 GOST7802		100	
17	Nut M8 GOST5915		120	
18	Washer 10 GOST11371		144	
19	Screw 6x20 GOST1145		4	
20	Screw 8x70 GOST11473		24	

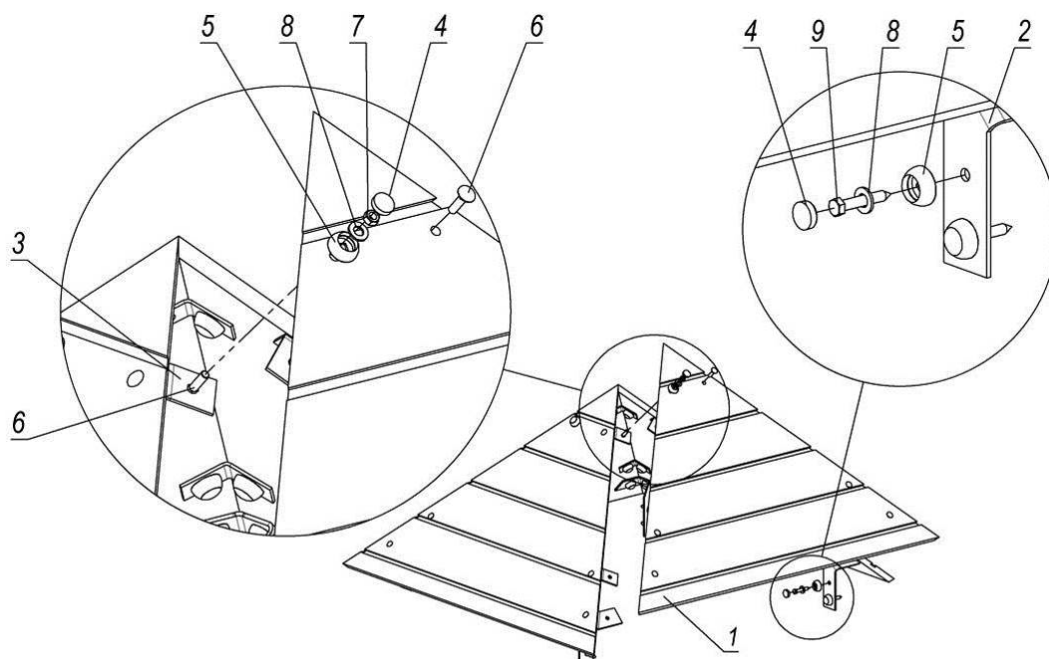


Pos.	Name	Weight, kg	Q-ty	Note
1	Pyramid roof slope	5	4	Blue
2	Supportive plate		4	Blue
3	Plate		8	Blue
4	Cap M8		32	Yellow
5	Cup M8		32	Yellow
6	Bolt M8x30 GOST7802		24	
7	Nut M8 GOST5915		24	
8	Washer 10 GOST11371		32	
9	Screw 8x50 GOST11473		8	

Picture 9 – Assembly scheme of pyramid roof.

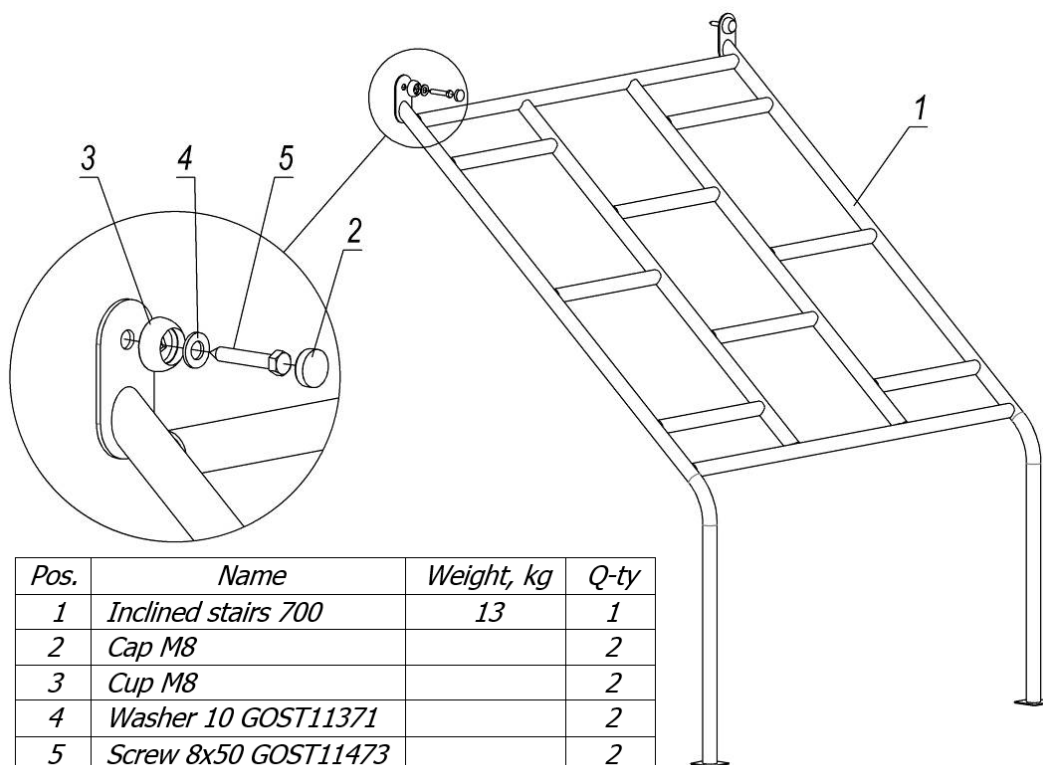


Pos.	Name	Weight, kg	Q-ty
1	Inclined stairs 700	13	1
2	Cap M8		2
3	Cup M8		2
4	Washer 10 GOST11371		2
5	Screw 8x50 GOST11473		2

Picture 10 – Assembly scheme of inclined ladder

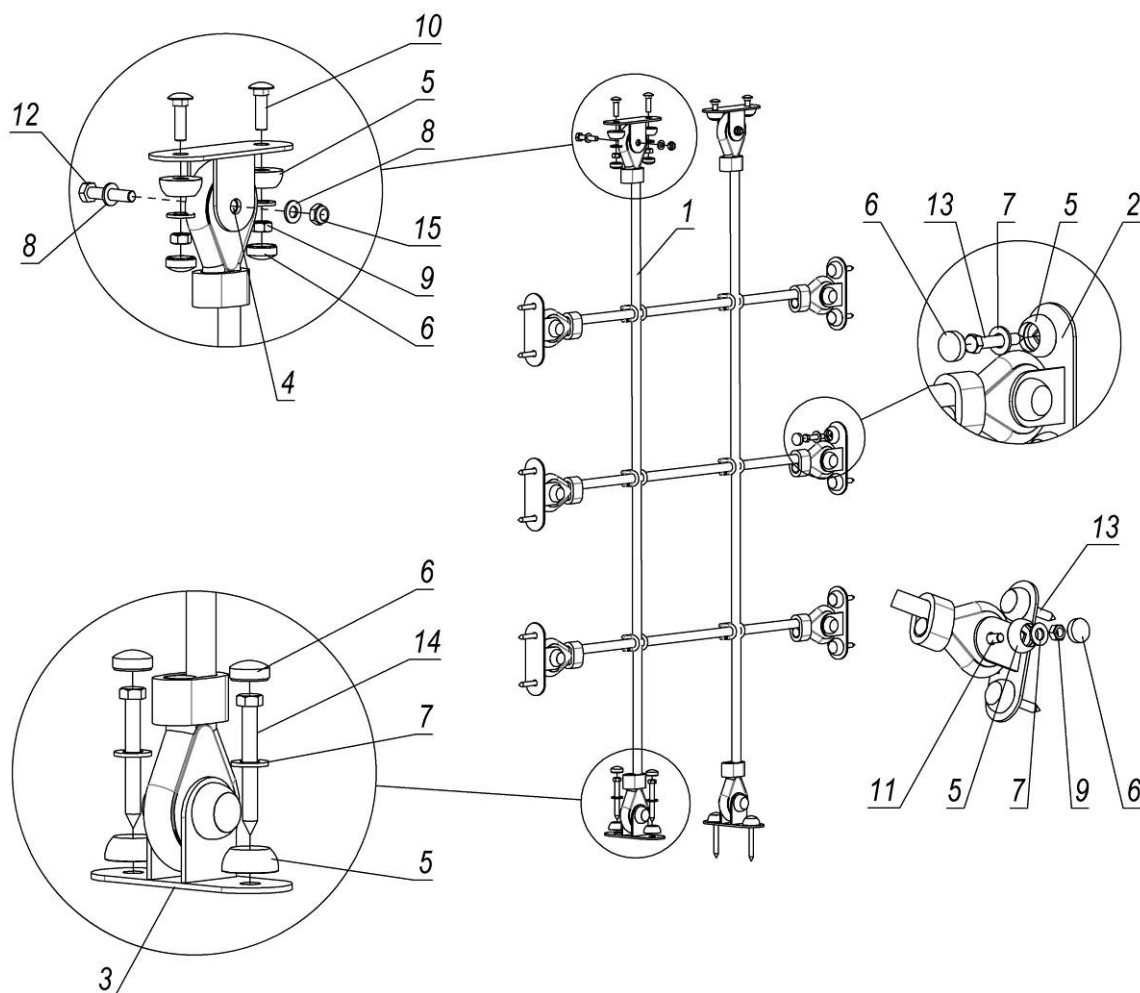


<i>Pos.</i>	<i>Name</i>	<i>Weight, kg</i>	<i>Q-ty</i>
1	Ladder assembly	3	1
2	Bracket		8
3	Bracket		2
4	Tube d12x1.5 GOST10704, L=22mm		9
5	Cup M8		36
6	Cap M8		36
7	Washer 10 GOST11371		36
8	Washer 8 GOST11371		4
9	Nut M8 GOST5915		12
10	Bolt M8x30 GOST7802		4
11	Bolt M8x45 GOST7798		8
12	Bolt M8x40 GOST7798		2
13	Screw 8x50 GOST11473		12
14	Screw 8x70 GOST11473		4
15	Self-locking nut M8 DIN985		2

Picture 11 – Assembly scheme of rope ladder (0,8x1,3) with fastening

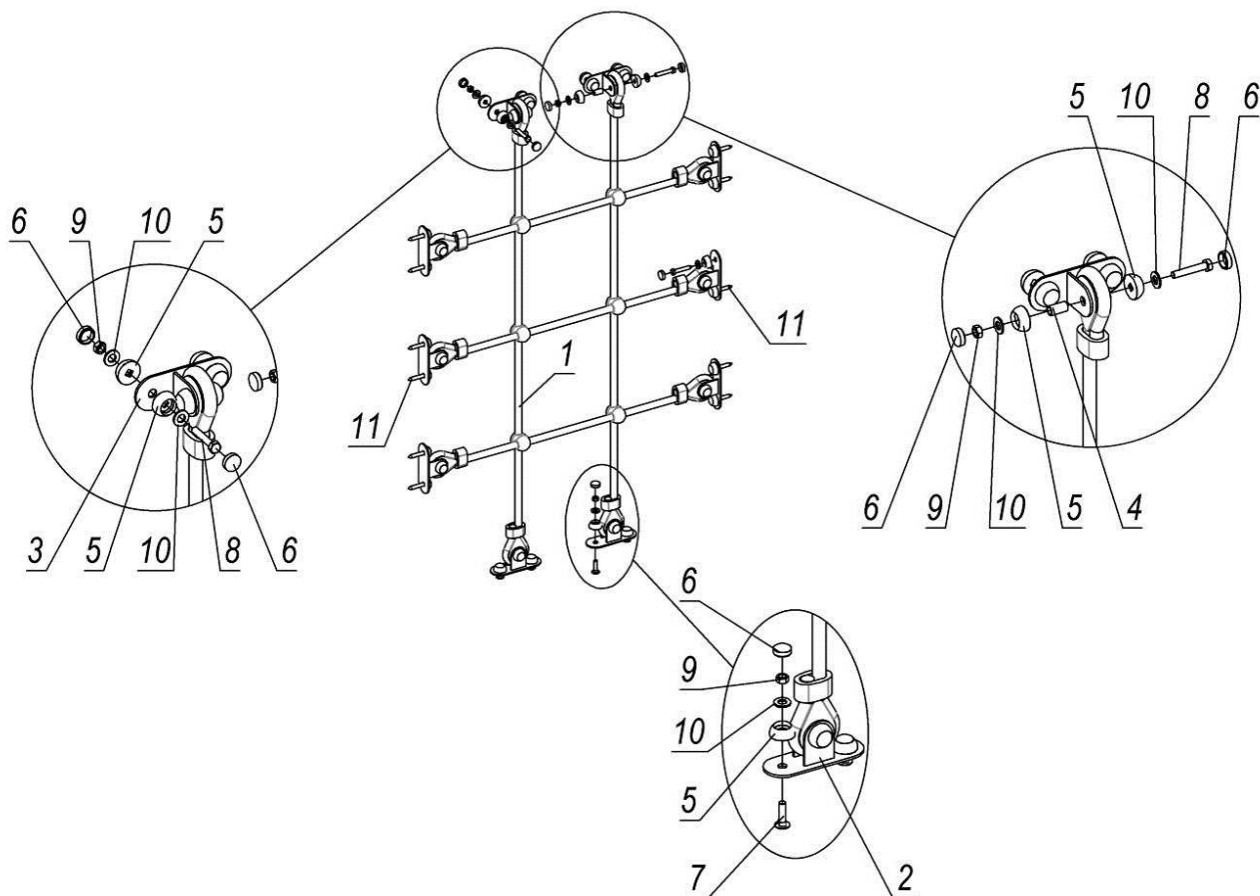


Pos.	Name	Weight, kg	Q-ty
1	Rope ladder (0.8x1.3)	3	1
2	Rope bracket		8
3	Bracket for thimble		2
4	Tube		10
5	Cup M8		44
6	Cap M8		44
7	Bolt M8x30 GOST7802		4
8	Bolt M8*45 GOST7798		14
9	Nut M8 GOST5915		18
10	Washer 10 GOST11371		44
11	Screw 8x50 GOST11473		12

Picture 12 – Assembly scheme of rope ladder (0,8x1,3) on tower 1,9x1,9

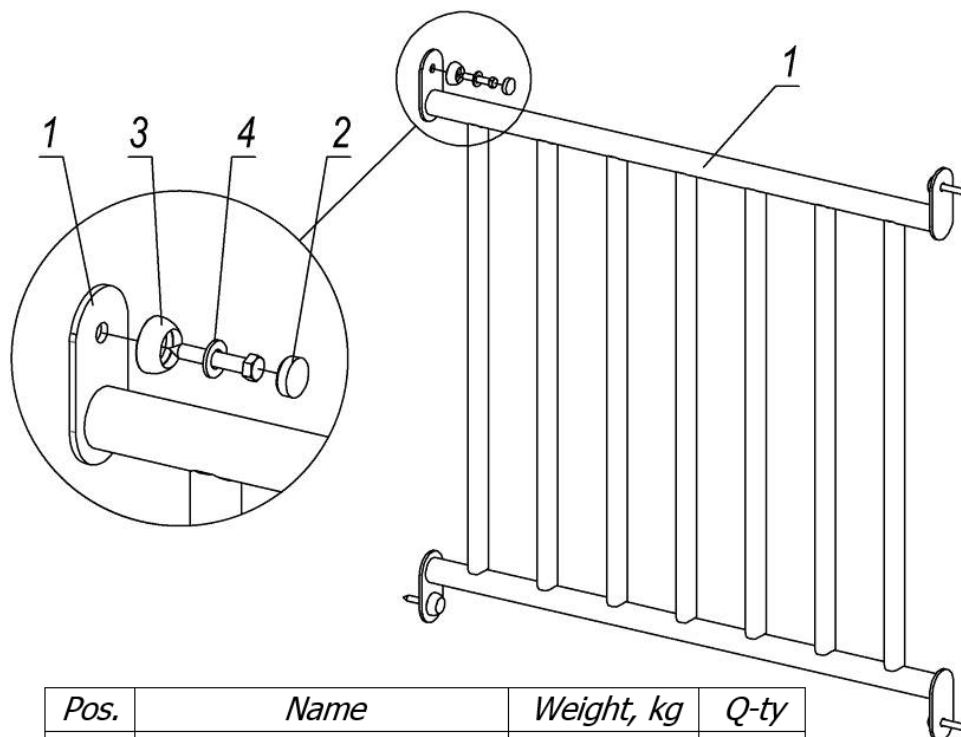


Pos.	Name	Weight, kg	Q-ty
1	Railing 0.8m	10	1
2	Cap M8		4
3	Cup M8		4
4	Washer 10 GOST11371		4
5	Screw 8x50 GOST11473		4

Picture 13 – Fence assembly scheme

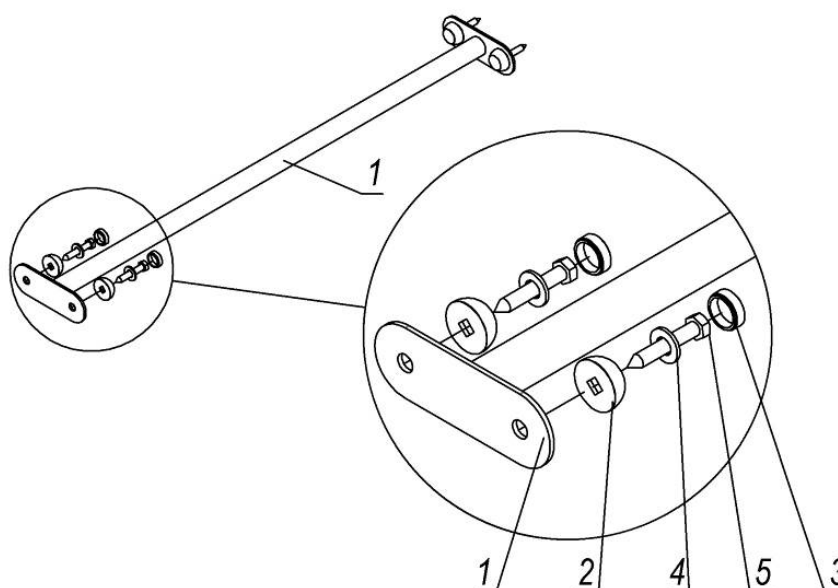


Pos.	Name	Weight, kg	Q-ty
1	Brace rod 0.8m	1	1
2	Cup M8		4
3	Cap M8		4
4	Washer 10 GOST11371		4
5	Screw 8x50 GOST11473		4

Picture 14 – Brace rod assembly scheme

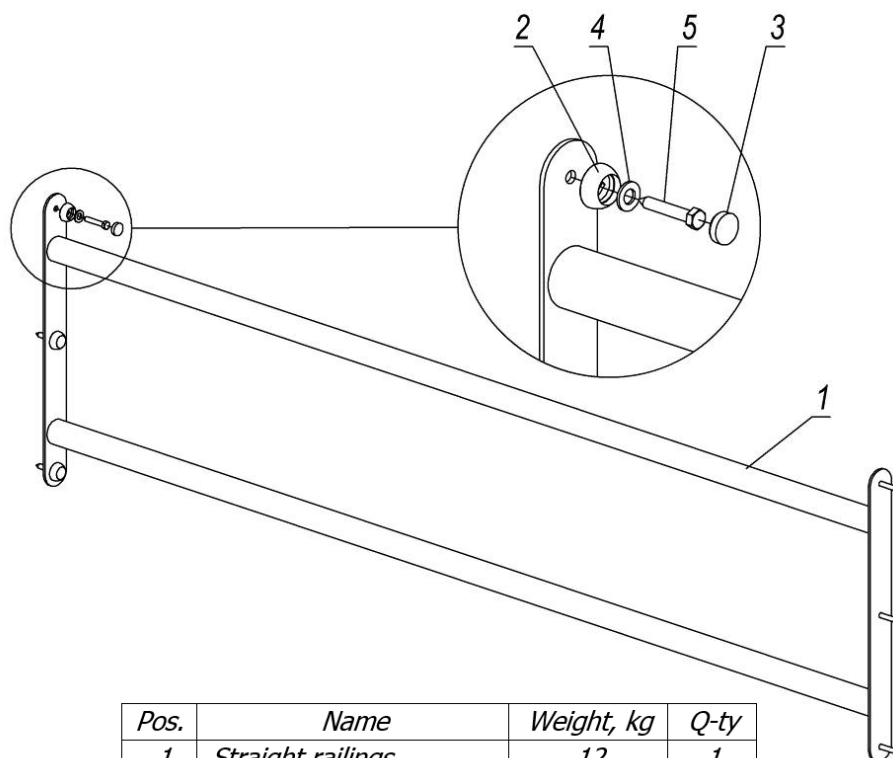


Pos.	Name	Weight, kg	Q-ty
1	Straight railings	12	1
2	Cup M8		6
3	Cap M8		6
4	Washer 10 GOST11371		6
5	Screw 8x50 GOST11473		6

Picture 15 – Assembly scheme of straight railings

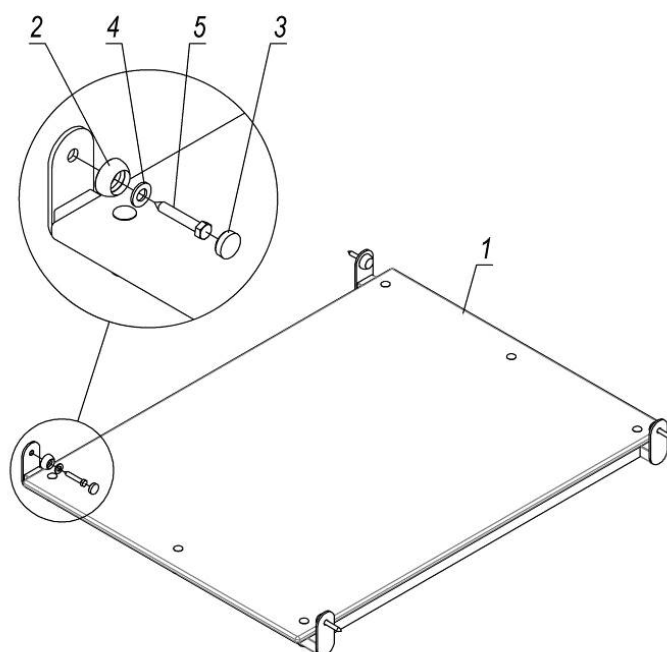


Pos.	Name	Weight, kg	Q-ty
1	Straight small bridge	17	1
2	Cup M8		4
3	Cap M8		4
4	Washer 10 GOST11371		4
5	Screw 8x50 GOST11473		4

Picture 16 – Assembly scheme of straight small bridge

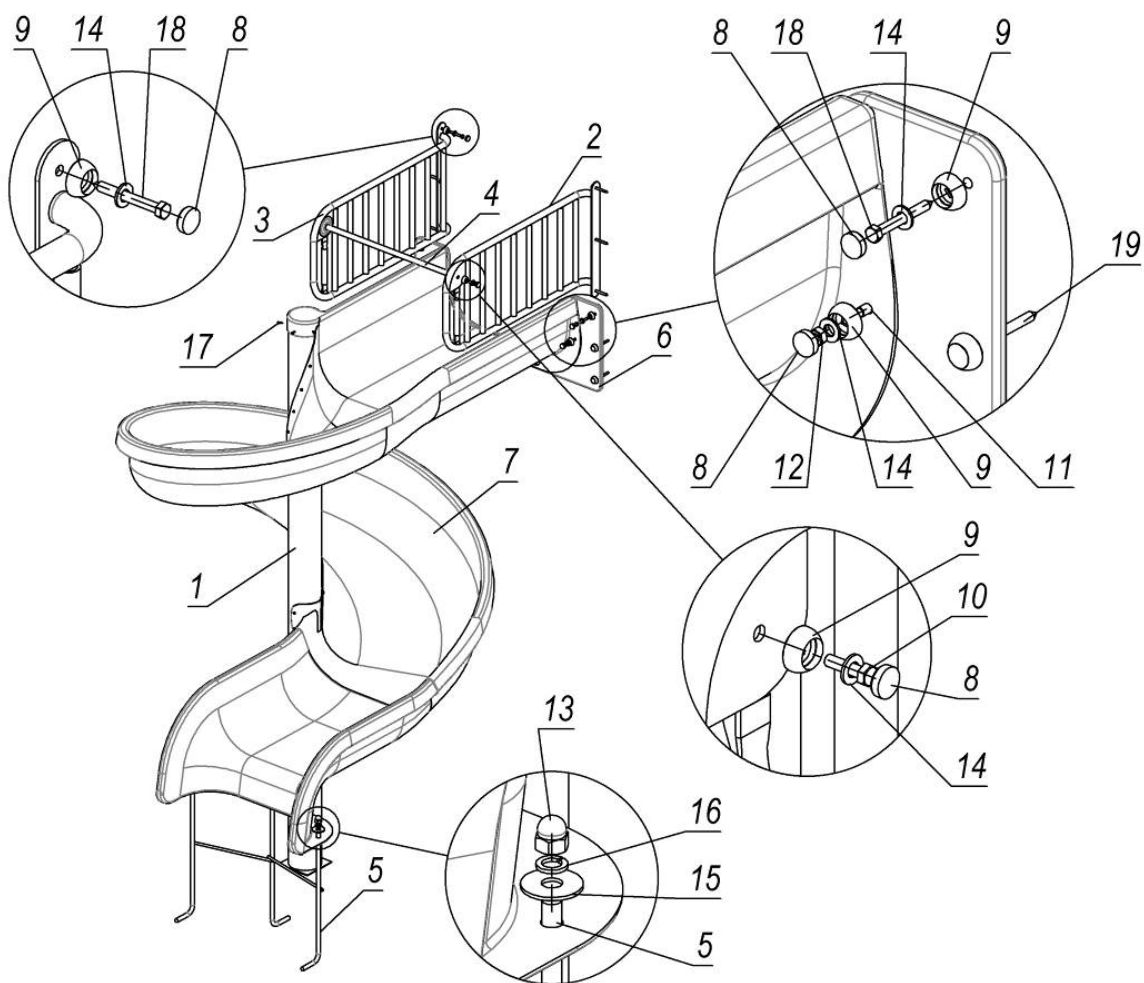


Pos.	Name	Weight, kg	Q-ty
1	Pillar	32	1
2	Sidewall frame left	8	1
3	Sidewall frame right	8	1
4	Brace rod	1	1
5	Embedded element	5	1
6	Lining	2	1
7	Spiral slide	28	1
8	Cap M8		20
9	Cup M8		20
10	Bolt M8x30 GOST7798		2
11	Bolt M8x30 GOST7802		6
12	Nut M8 GOST5915		6
13	Cap nut M16 DIN1587		3
14	Washer 10 GOST11371		20
15	Washer 16 GOST6958		3
16	Washer 16 GOST6402		3
17	Screw 4.2x16 DIN 7504N	2	19
18	Screw 8x70 GOST11473		7
19	Screw 8x90 GOST11473		5

Picture 17 – Assembly scheme of spiral descent

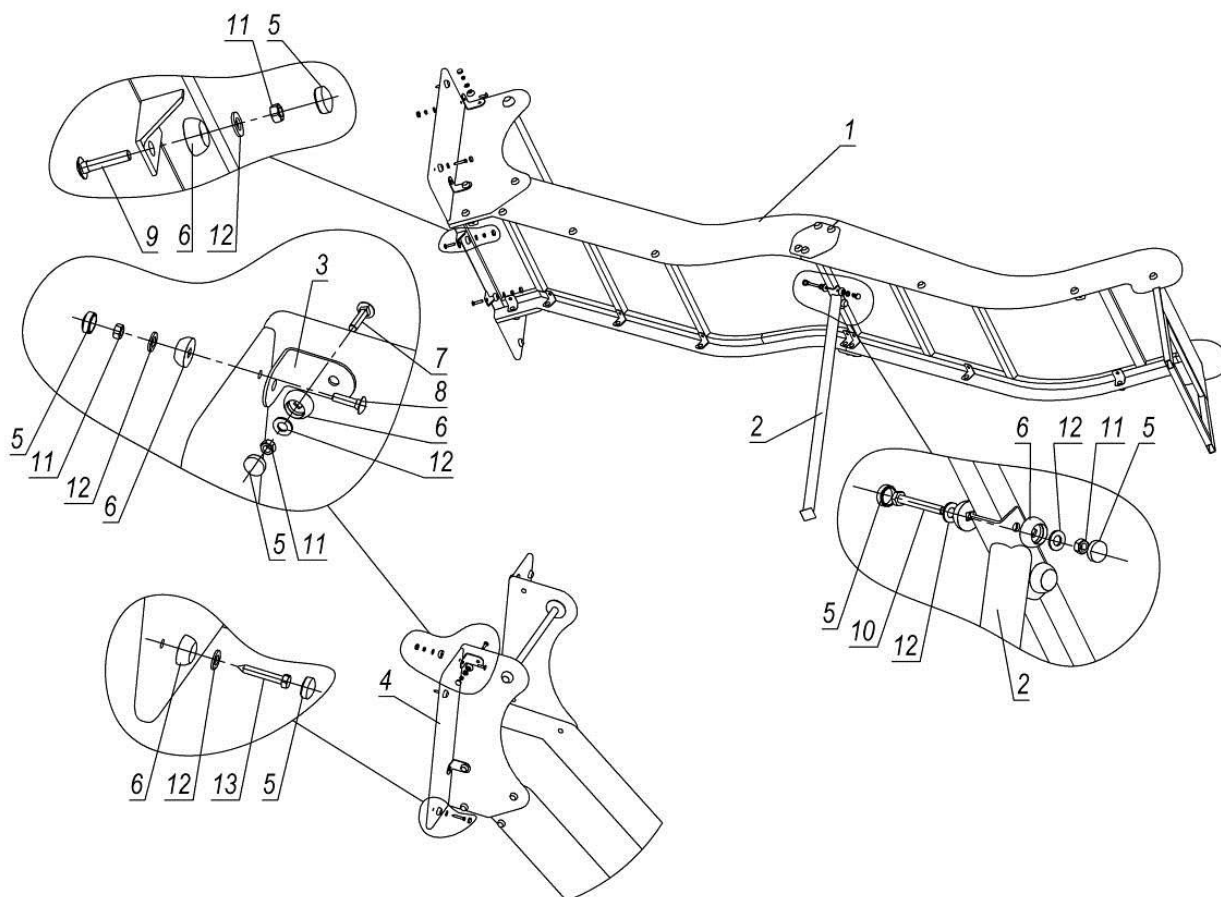



Pos.	Name	Weight, kg	Q-ty
1	Wavy slide (2m)	77	1
2	Support for 2m slide	4	1
3	Angle bar		4
4	Fence	2	2
5	Cap M8		18
6	Cup M8		18
7	Bolt M8x35 GOST7802		4
8	Bolt M8x30 GOST7802		4
9	Bolt M8x40 GOST7802		2
10	Bolt M8x65 GOST7798		2
11	Nut M8 GOST5915		12
12	Washer 10 GOST11371		18
13	Screw 8x50 GOST11473		4

Picture 18 – Assembly scheme of slide 2m

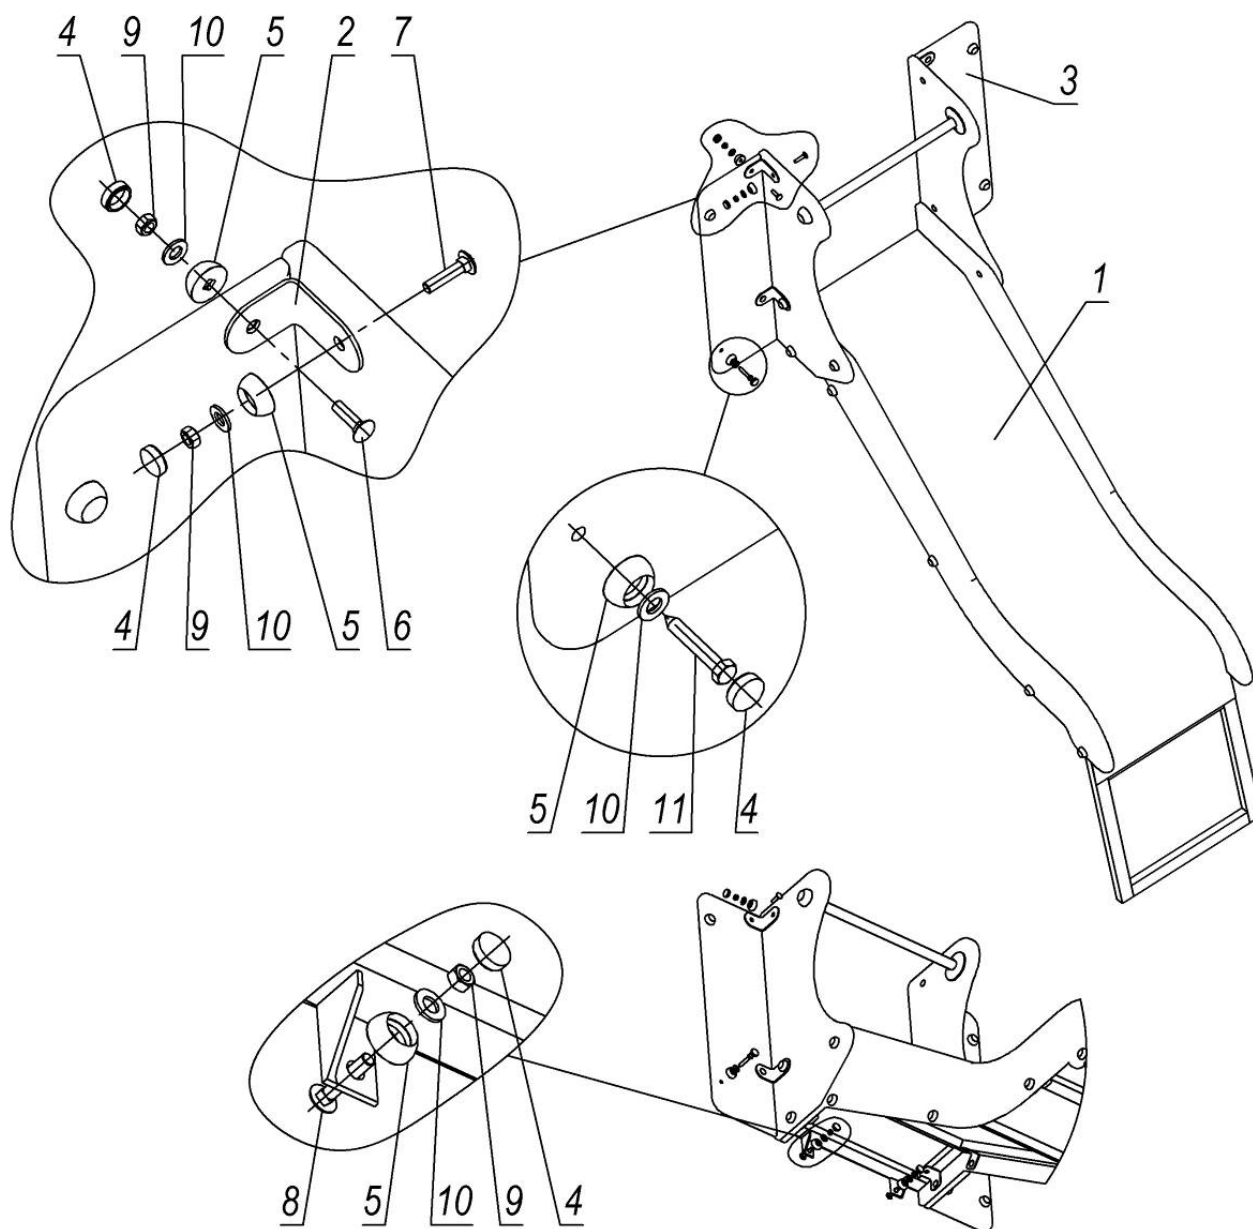


Pos.	Name	Weight, kg	Q-ty
1	Slide 700 mm	38	1
2	Angle bar		4
3	Fence	2	2
4	Cap M8		14
5	Cup M8		14
6	Bolt M8x30 GOST7802		4
7	Bolt M8x35 GOST7802		4
8	Bolt M8x40 GOST7802		2
9	Nut M8 GOST5915		10
10	Washer 10 GOST11371		14
11	Screw 8x50 GOST11473		4

Picture 19 – Assembly scheme of slide 700mm

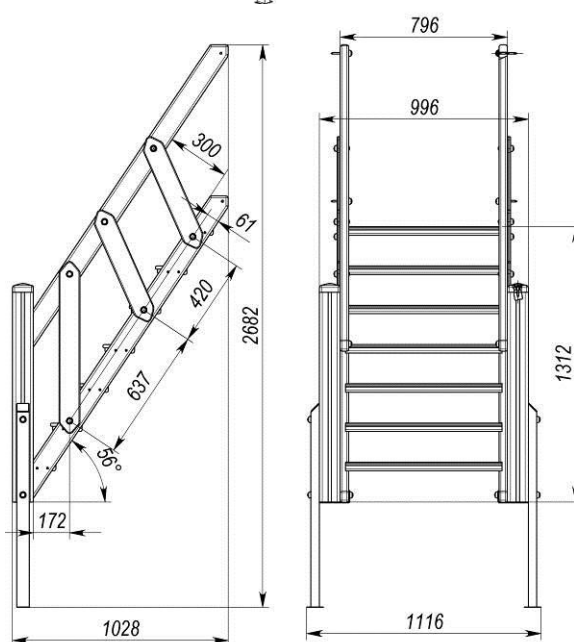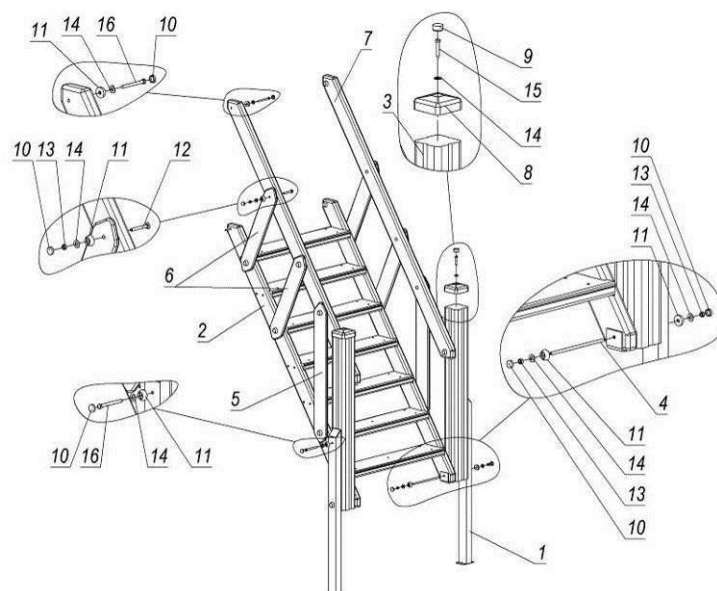


Pos.	Name	Weight, kg	Q-ty
1	Rack	4	2
2	Stairs	28	1
3	Support	6	2
4	Sprig L=210 mm	0.1	2
5	Cover plate	1	2
6	Small cover plate	1	4
7	Handrail	4	2
8	Cap		2
9	Cap		2
10	Cap M8		24
11	Cup M8		24
12	Bolt M8x65 GOST7802		6
13	Nut M8 GOST5915		10
14	Washer 10 GOST11371		26
15	Screw 8x50 GOST11473		8
16	Screw 8x90 GOST11473		8

Picture 20 – Completeness and assembly scheme of wooden ladder

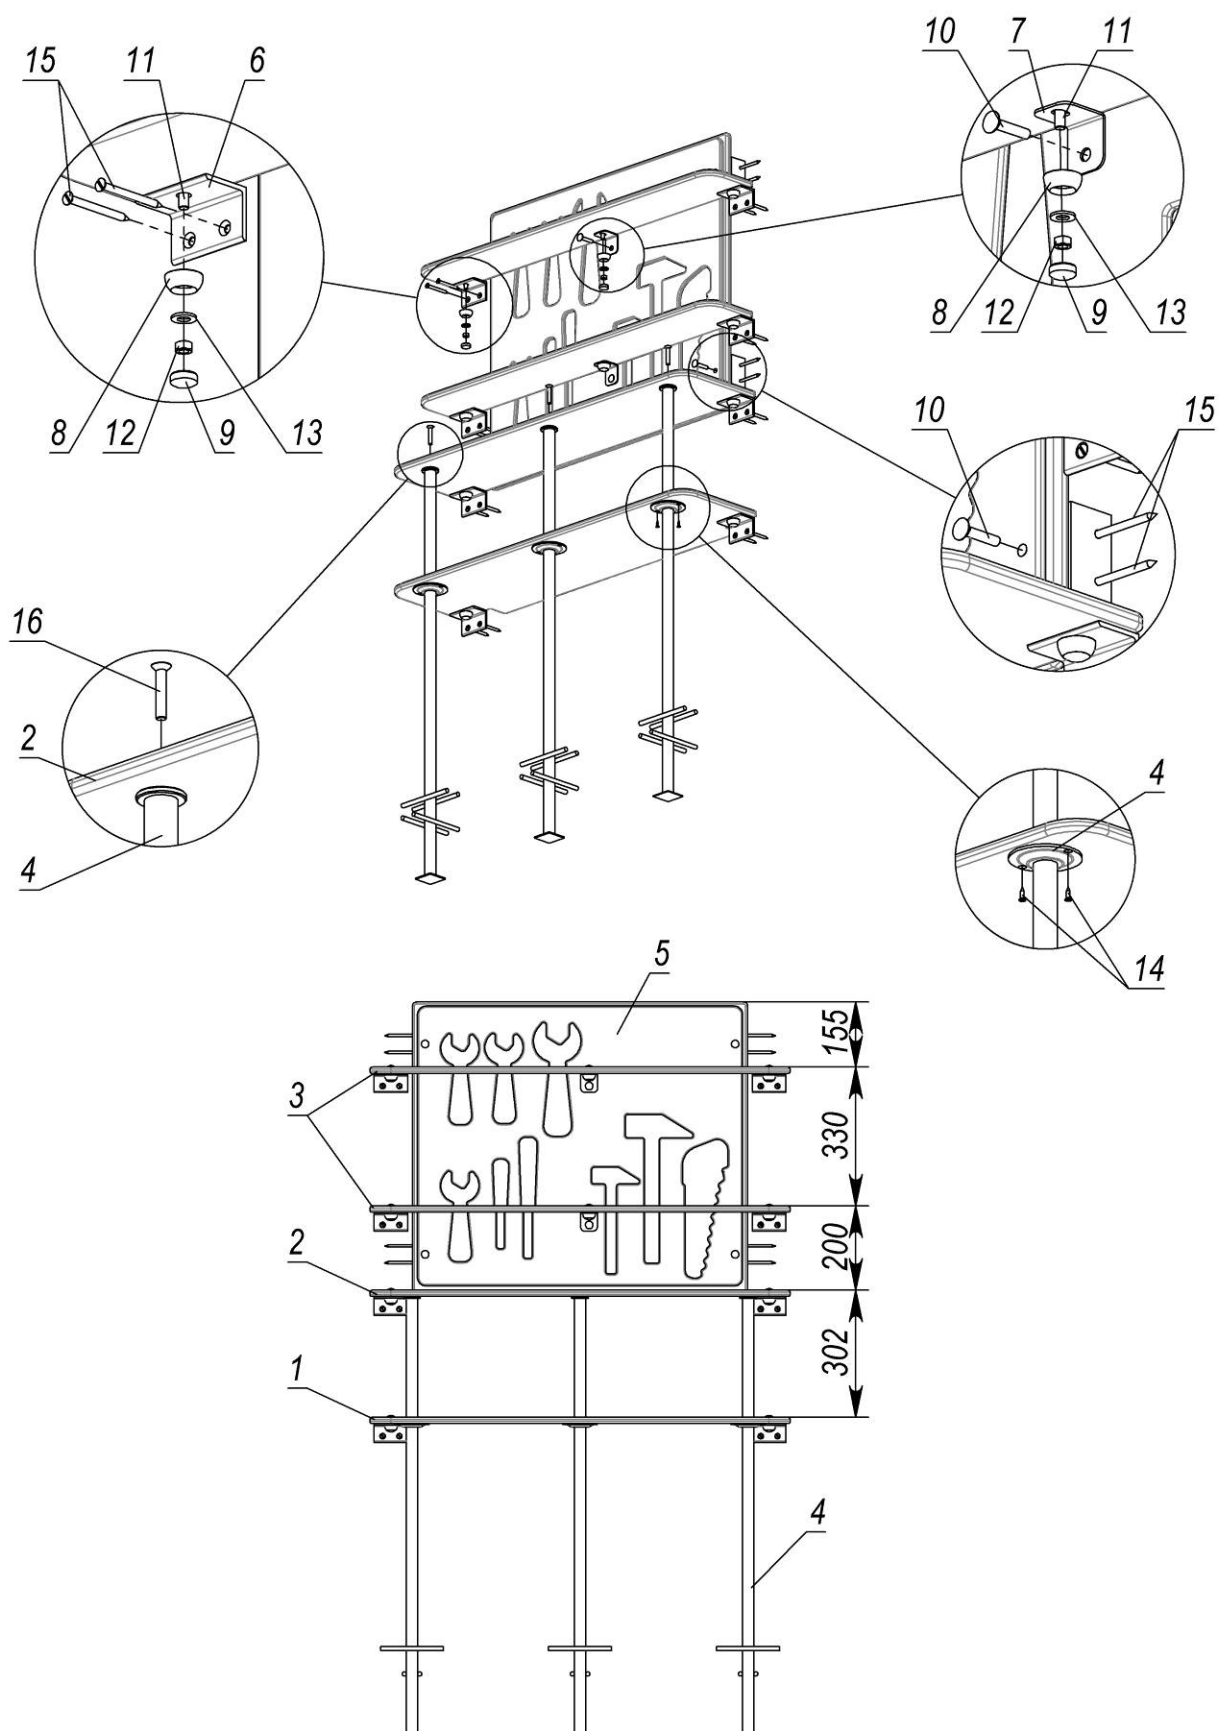


<i>Pos.</i>	<i>Name</i>	<i>Weight, kg</i>	<i>Q-ty</i>
1	Lower table	3	1
2	Upper table	3	1
3	Shelf	2	2
4	Workshop support	2	3
5	Panel "Workshop"	9	1
6	Big angle bar		12
7	Small angle bar		2
8	Cup M8		16
9	Cap M8		16
10	Bolt M8x40 GOST7802		6
11	Bolt M8x30 GOST7802		10
12	Nut M8 GOST5915		16
13	Washer 10 GOST11371		16
14	Screw 4x16 GOST1145		6
15	Screw 6x70 GOST1145		24
16	Stud M8x45 DIN7991		3

Picture 21 – Completeness and assembly scheme of «Panel workshop»

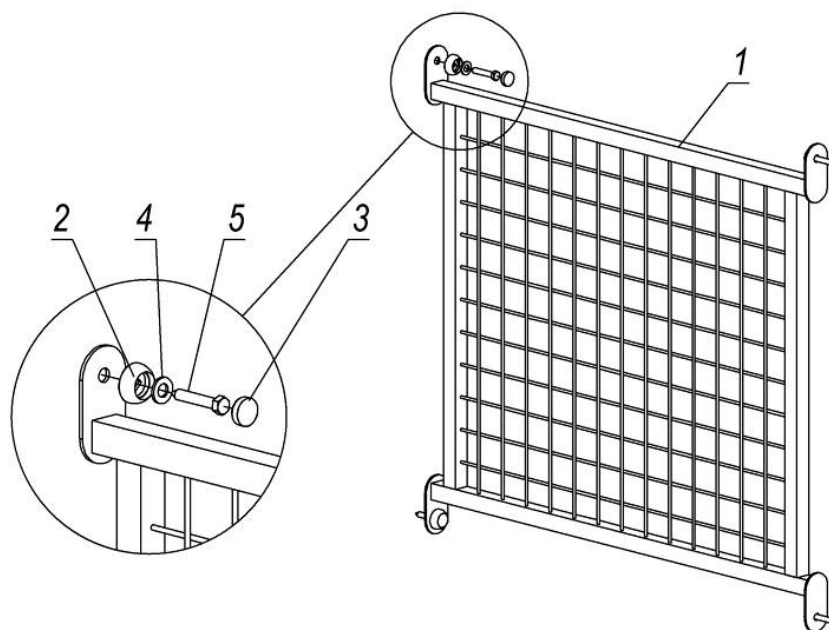


<i>Pos.</i>	<i>Name</i>	<i>Weight, kg</i>	<i>Q-ty</i>
1	Mesh fence (0.8m)	6	1
2	Cup M8		4
3	Cap M8		4
4	Washer 10 GOST11371		4
5	Screw 8x50 GOST11473		4

Picture 22 – Assembly scheme of mesh fence

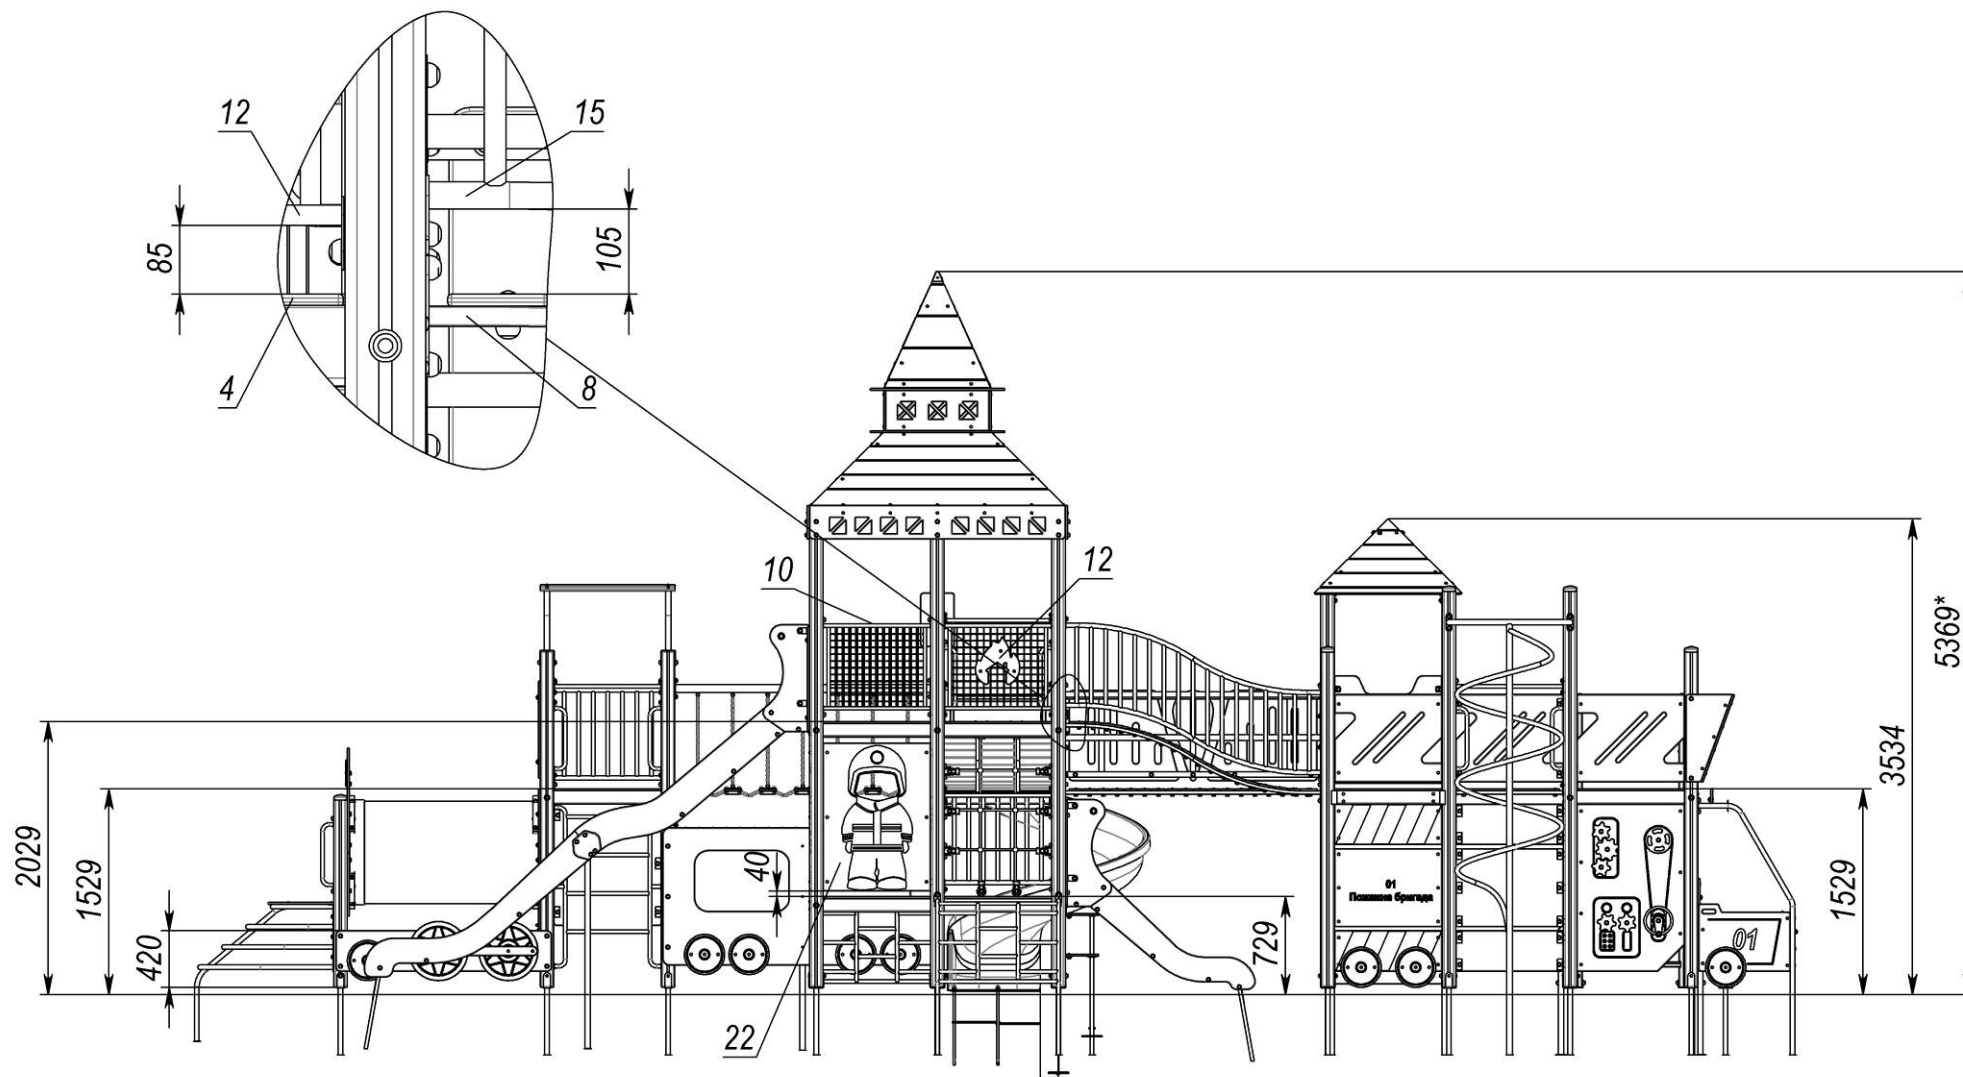


Picture 24

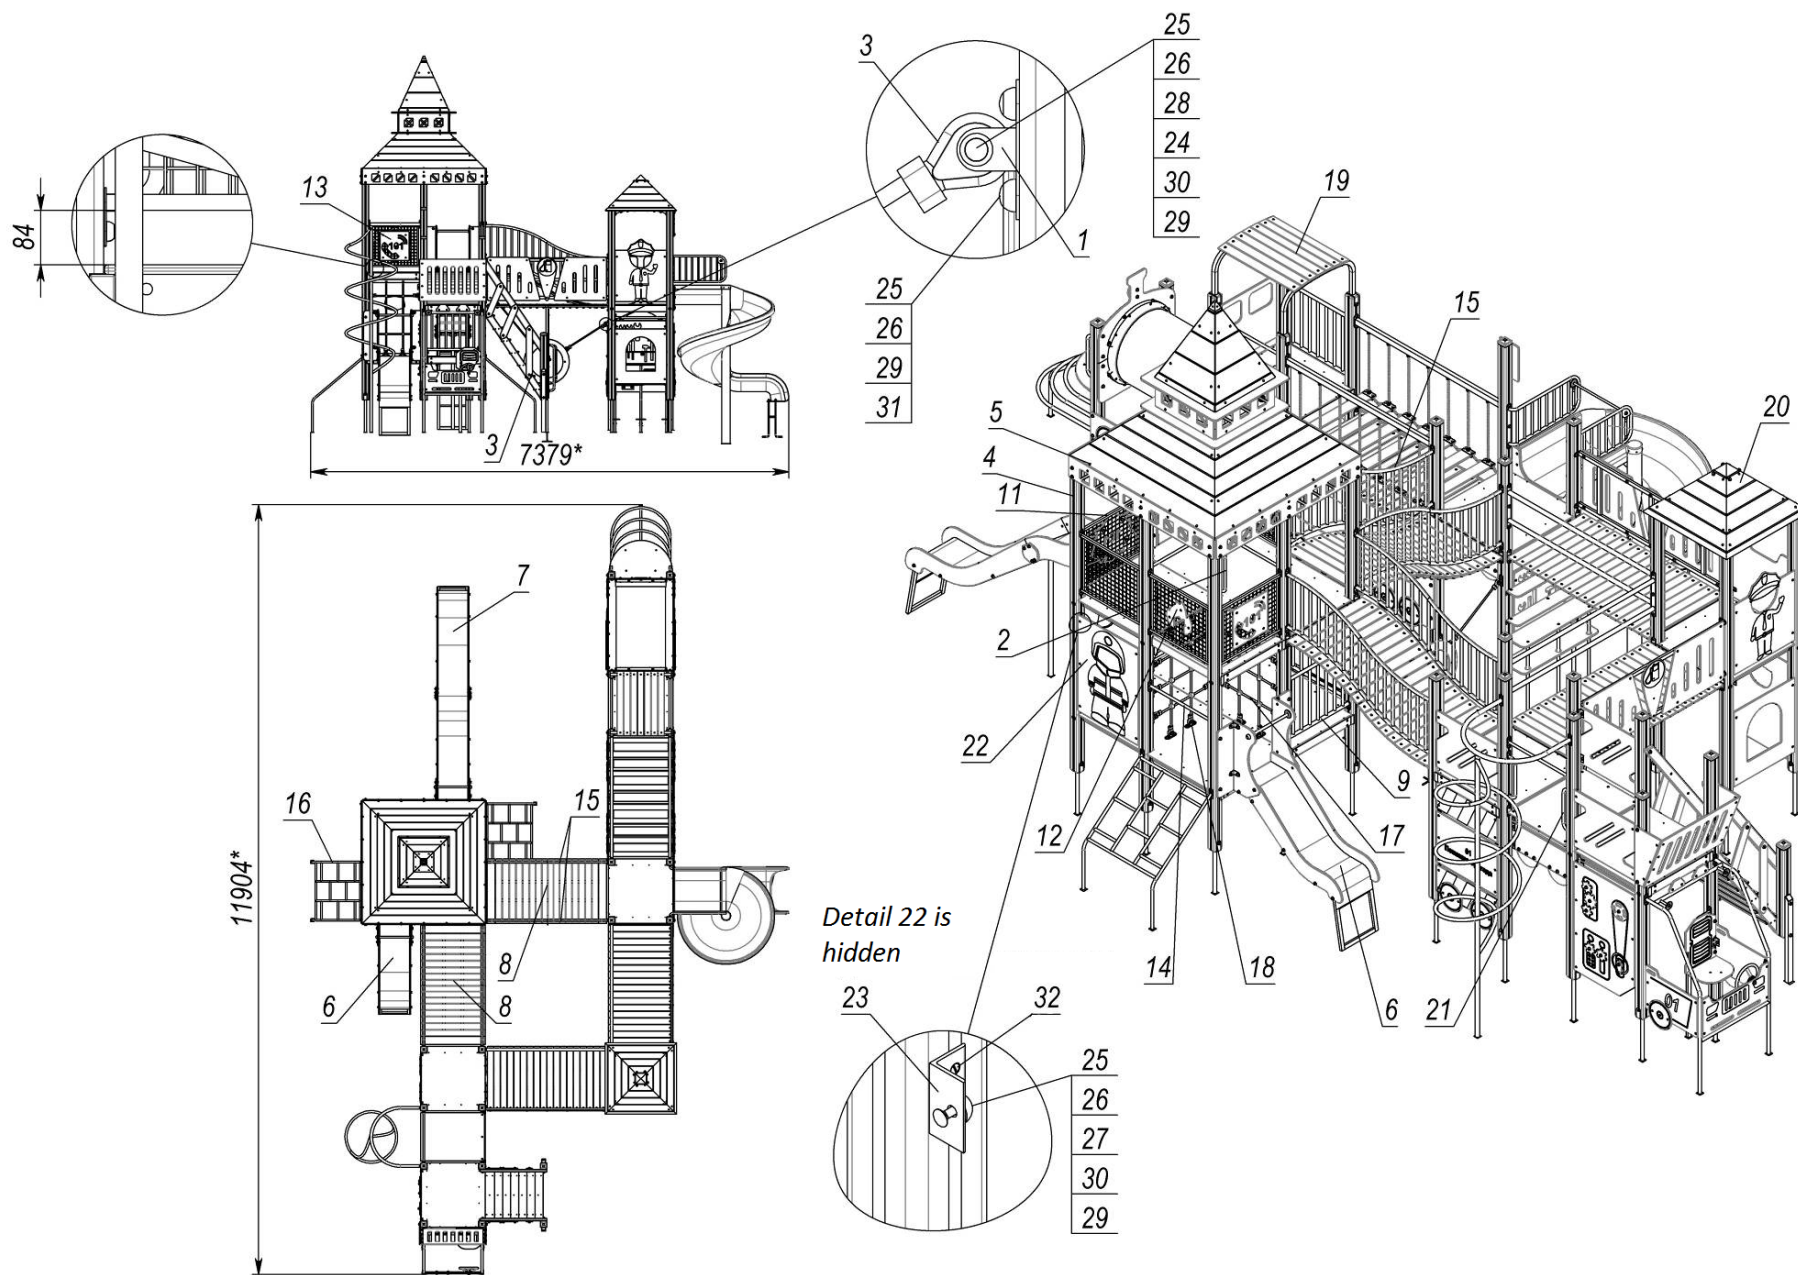

Picture 25 – Overall dimensions of the complex

<i>Pos.</i>	<i>Name</i>	<i>Weight, kg</i>	<i>Q-ty</i>
1	Rope bracket		2
2	Handle	1	3
3	Circle with rope	8	1
4	Double tower (1.9mx1.9m) beam 3.5m	318	1
5	Big roof (T922)	129	1
6	Slide 700 assembly		1
7	Wavy slide (2m) assembly	86	1
8	Wavy bridge (plywood TPS)	40	2
9	Fence 0.8m	11	3
10	Mesh fence (0.8m)	6	2
11	Mesh fence "101"	7	1
12	Mesh fence "Fire"	7	1
13	Fire fence	7	1
14	Brace rod assembly	2	4
15	Wavy railings (drop 500mm)	23	4
16	Inclined ladder 700mm assembly	13	2
17	Rope ladder (0.8x1.3) with fastening	6	1
18	Rope ladder (0.8x1.3) on tower 1.9x1.9	6	1
19	Part 2 GC "Transport"	600	1
20	Part 3 "Workshop"	351	1
21	Fire engine	417	1
22	Cover plate "Fireman"	9	2
23	Big angle bar		12
24	Tube		2
25	Cap M8		78
26	Cup M8		78
27	Bolt M8x30 GOST7802		12
28	Bolt M8*45 GOST7798		2
29	Washer 10 GOST11371		78
30	Nut M8 GOST5915		14
31	Screw 8x50 GOST11473		62
32	Screw 6x70 GOST1145		24


Picture 26

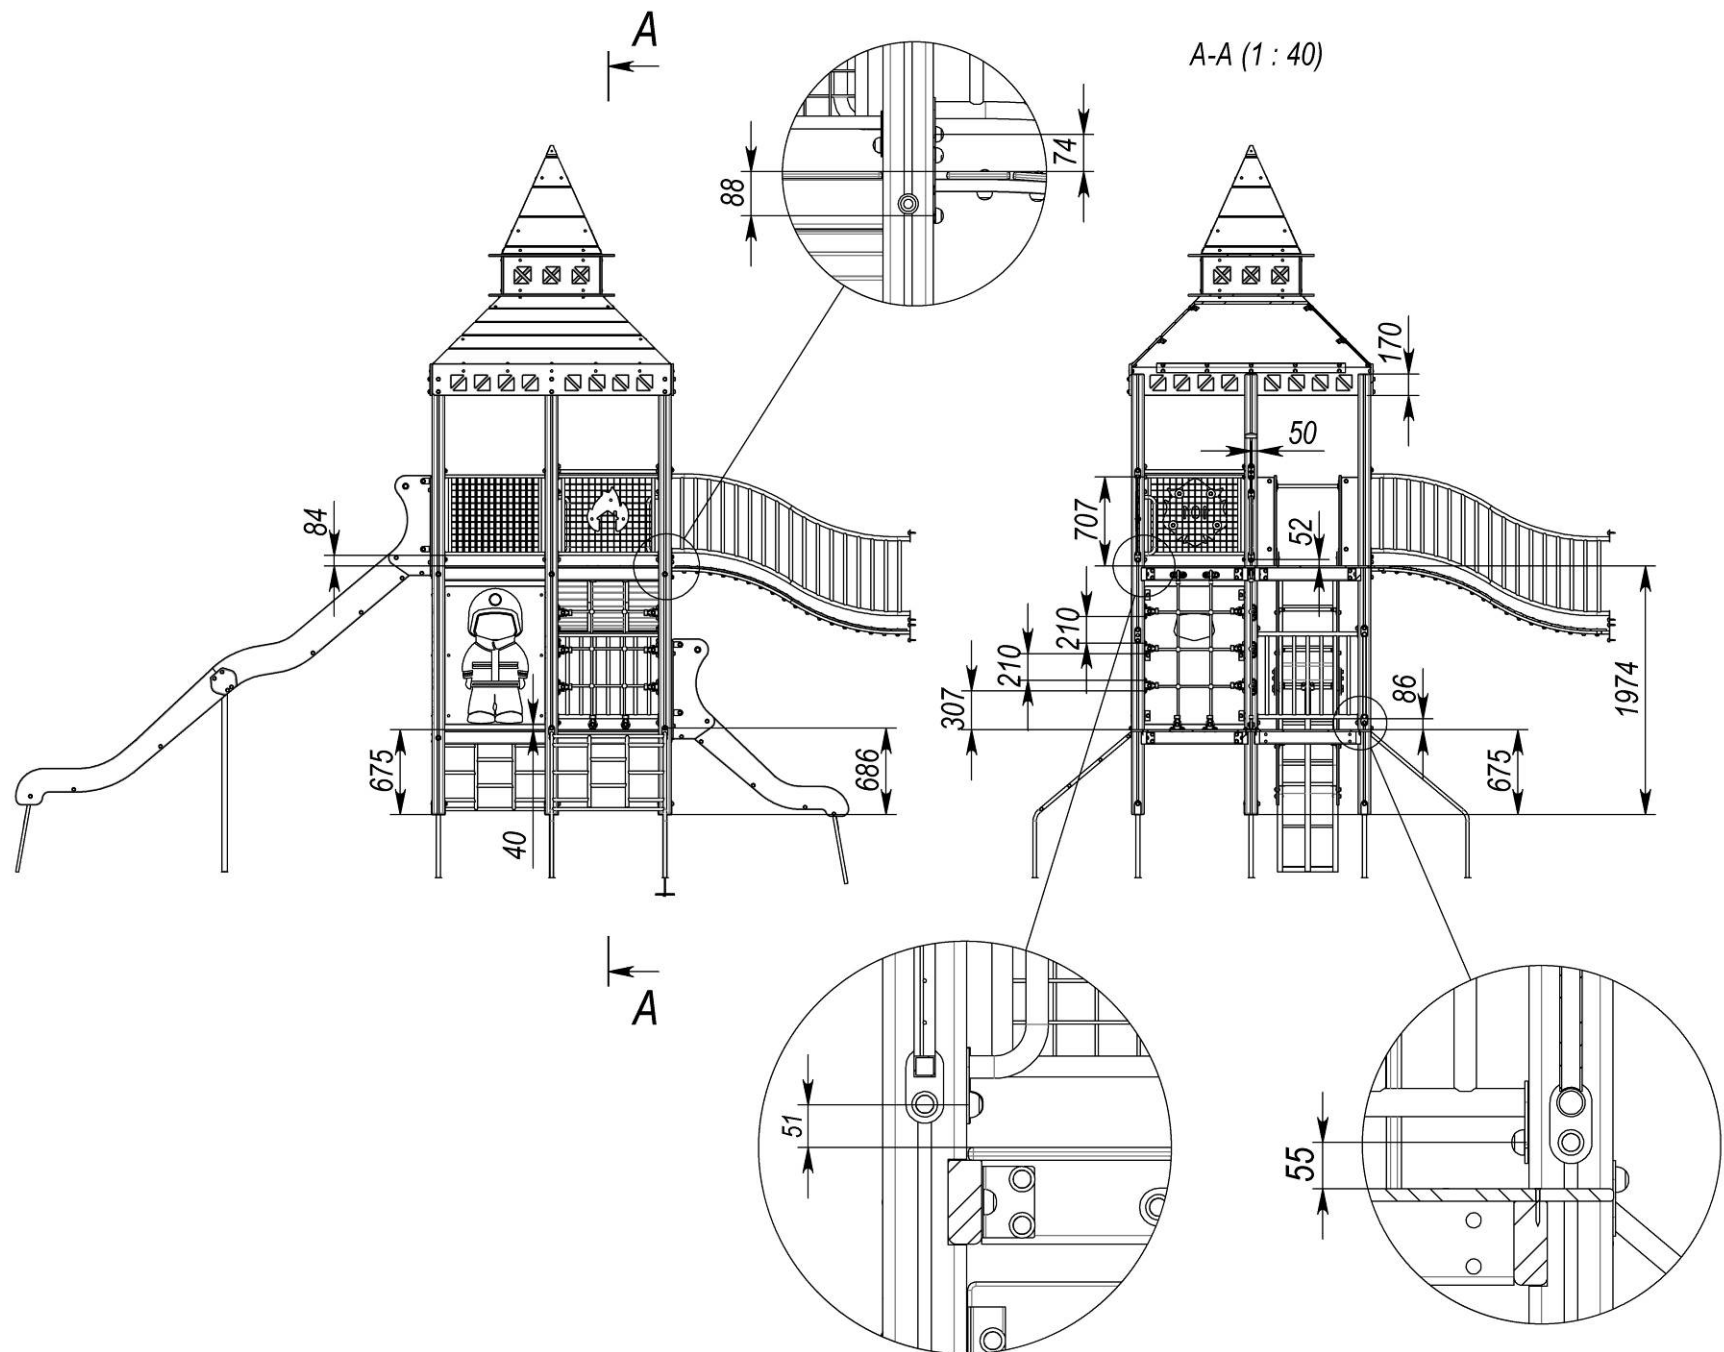


Picture 27

Part 2 «Transport»

↓ A

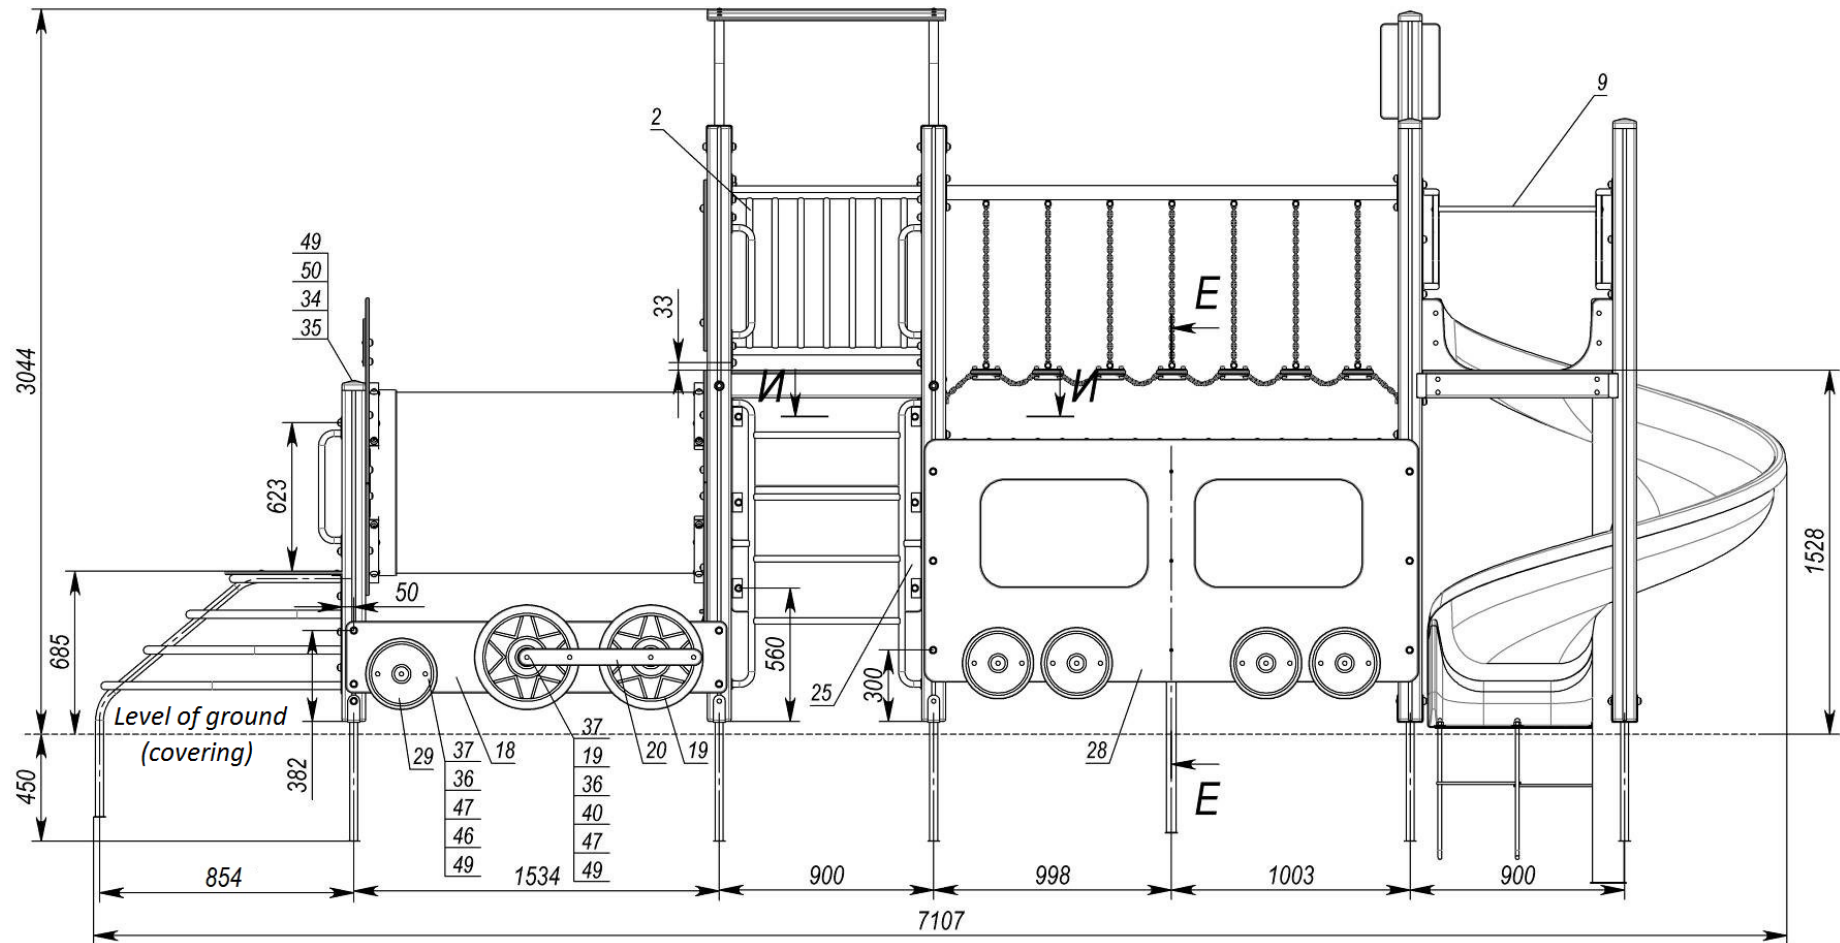

I-I (1 : 5)




Drill holes with a diameter of 5 mm for GOST 11473 screws.

Picture 28


<i>Pos.</i>	<i>Name</i>	<i>Weight, kg</i>	<i>Q-ty</i>	<i>Pos.</i>	<i>Name</i>	<i>Weight, kg</i>	<i>Q-ty</i>
1	Beam support	2	2	29	Cover plate "Wheel"	1	10
2	Railings 0.8 m	10	1	30	Big headlight		1
3	Handle	1	4	31	Big angle bar		6
4	Cowcatcher frame	25	1	32	Angle bar	1	2
5	Locomotive roof frame	5	2	33	Cap S13		4
6	Support	4	2	34	Cap		2
7	Tower (1.5m) with metalware	84	1	35	Cap		2
8	Tower	86	1	36	Cap M8		220
9	Spiral descent assembly	84	1	37	Cup M8		220
10	Straight bridge	59	1	38	Bolt M8x30 GOST7802		10
11	Chain bridge (plywood TPS)	54	1	39	Bolt M8x120 DIN931		4
12	Tube frame	2	4	40	Bolt M8x50 GOST7802		8
13	Brace rod 0.8m	1	3	41	Bolt M8x35 GOST7802		32
14	Metal ladder	8	1	42	Bolt M8x70 GOST7802		14
15	Beam (L=1500)	8	2	43	Bolt M8x120 GOST7802		2
16	Cowcatcher site	5	1	44	Bolt M8x60 GOST7802		16
17	Cover plate entrance with tube	3	1	45	Bolt M8x65 GOST7802		16
18	Locomotive sidewall	5	2	46	Bolt M8x40 GOST7802		8
19	Locomotive big wheel	1	4	47	Nut M8 GOST5915		110
20	Cover plate connecting rod		2	48	Washer 8 GOST11371		4
21	Cover plate entrance with stairs	7	1	49	Washer 10 GOST11371		222
22	Step		2	50	Screw 8x50 GOST11473		112
23	Locomotive front window	5	1	51	Washer 10 GOST6958		4
24	Cover plate entrance	3	2	52	Screw with drill 4.8x25 DIN7504P	5	2
25	Cover plate	5	1	53	Screw with drill 6.3x45 DIN7504P	5	6
26	Locomotive roof board		7	54	Screw 6x40 GOST1145		12
27	Cover plate sign	1	1	55	Straight tube 760	30	1
28	Locomotive sidewall with windows	17	2	56	Plug 40x40		8

Picture 29

Part 3 «Workshop»

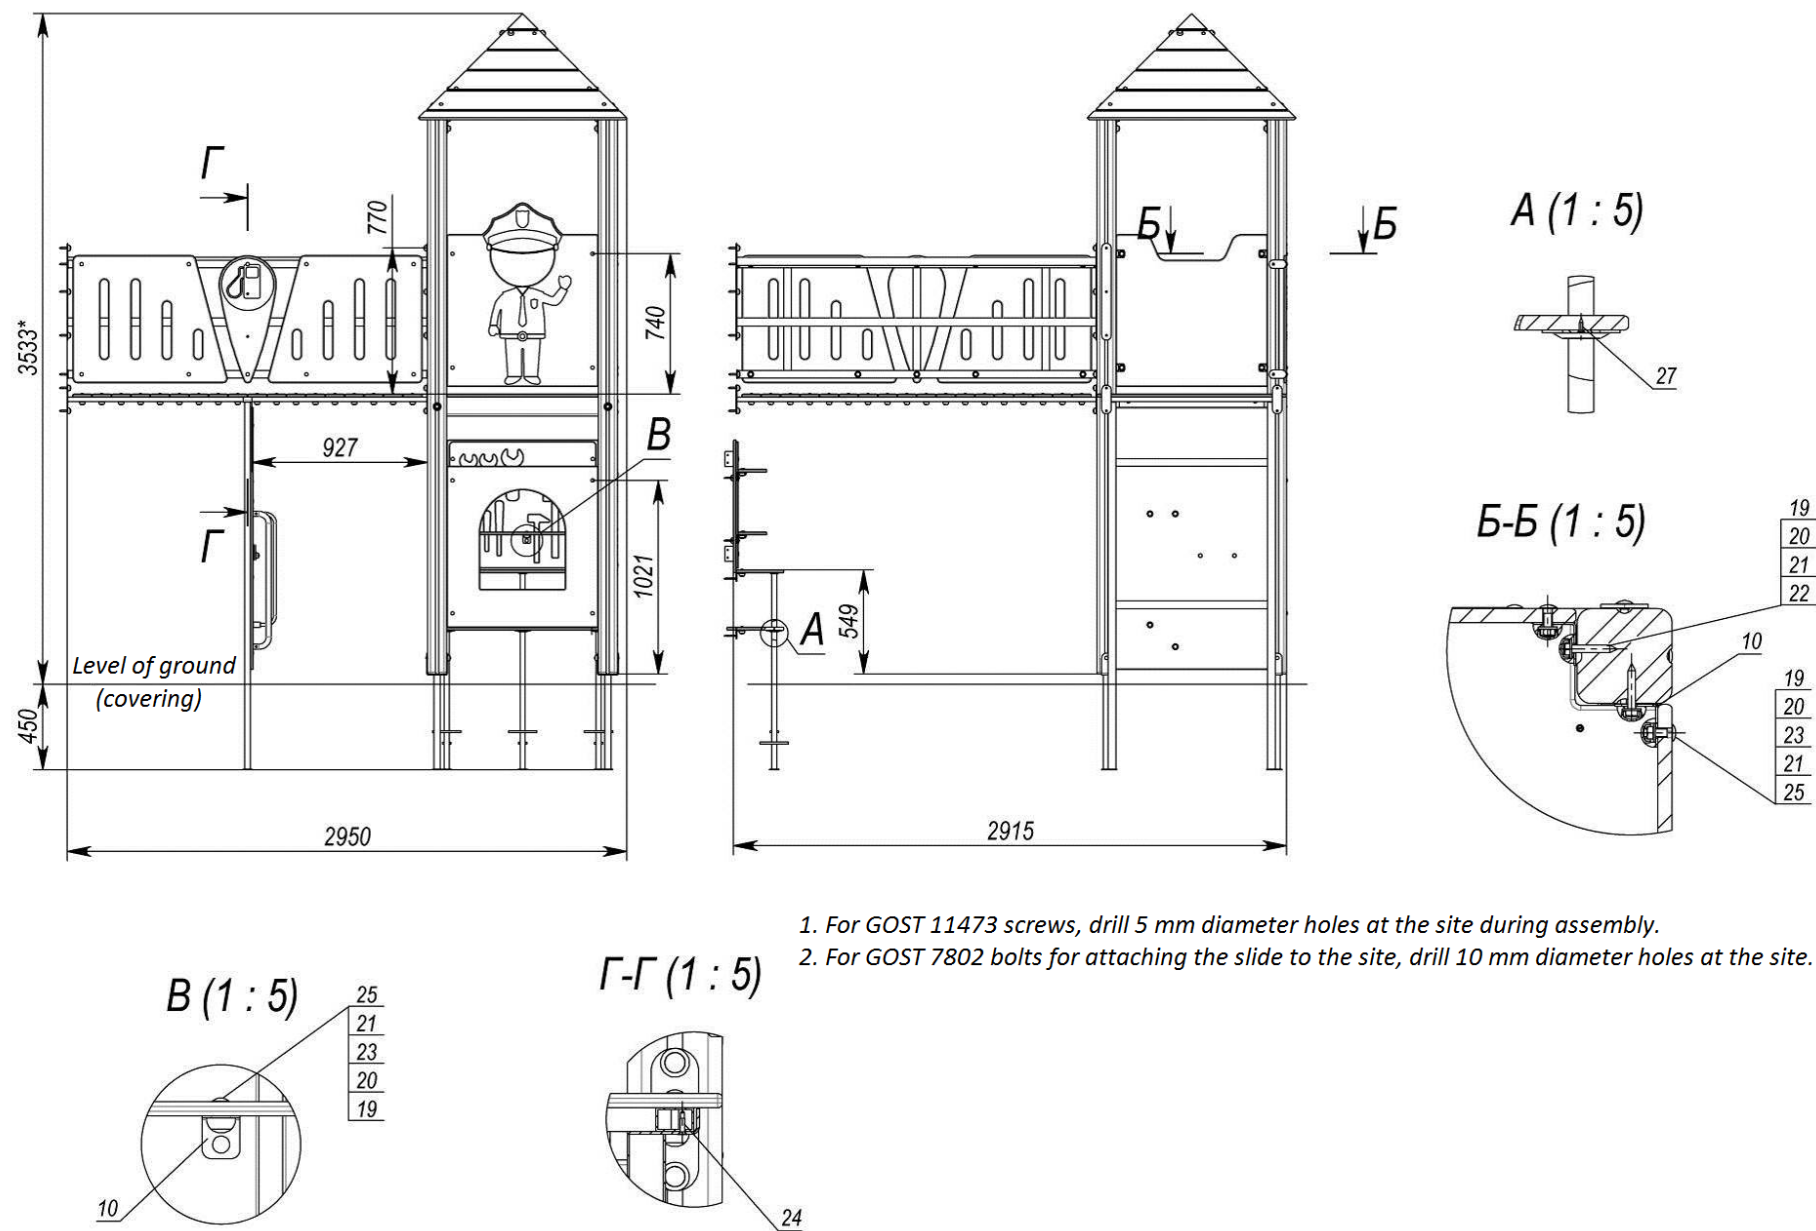


Picture 31

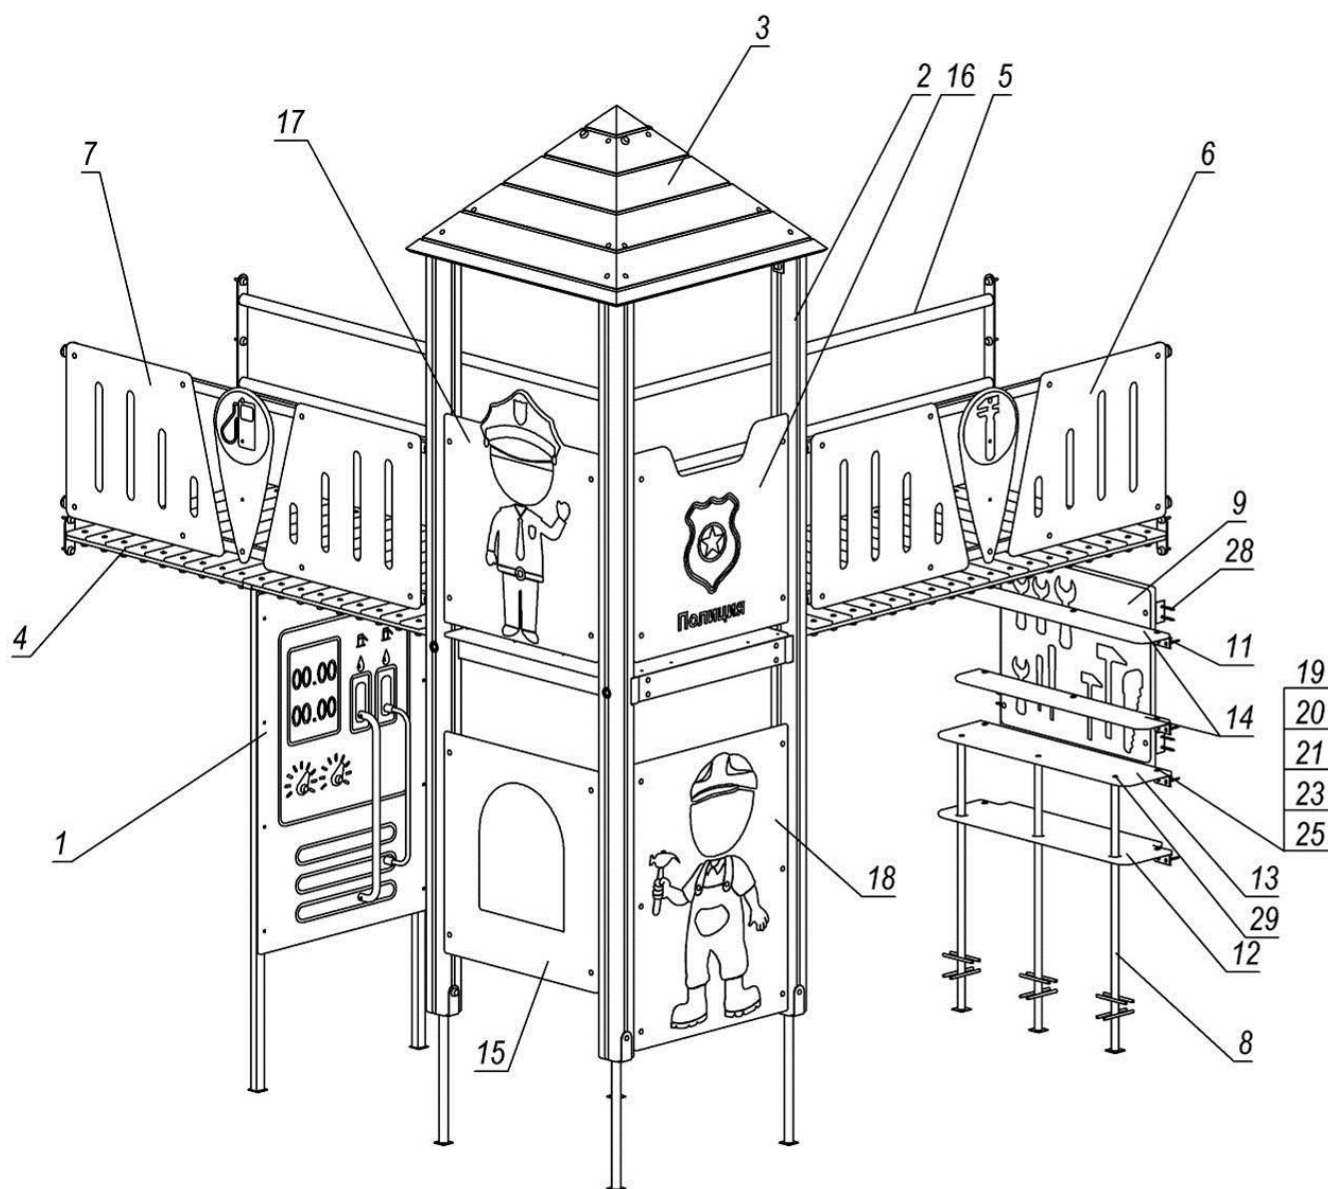

Pos.	Name	Weight, kg	Q-ty
1	Petrol station	27	1
2	Tower 1.5m 1x1	93	1
3	Pyramid roof	22	1
4	Straight plywood bridge	39	2
5	Metal straight railings assembly	12	2
6	Fence "Service station"	22	1
7	Fence "Petrol station"	22	1
8	Workshop support	2	3
9	Panel "Workshop"	9	1
10	Small angle bar		10
11	Big angle bar		22
12	Lower table	3	1
13	Upper table	3	1
14	Shelf	2	2
15	Window	5	1
16	Cover plate "Police badge"	7	1
17	Cover plate "Policeman"	7	1
18	Cover plate "Mechanic"	9	1
19	Cap M8		66
20	Cup M8		66
21	Washer 10 GOST11371		66
22	Screw 8x50 GOST11473		32
23	Nut M8 GOST5915		34
24	Screw with drill 4.8x25 DIN7504P		2
25	Bolt M8x30 GOST7802		28
26	Bolt M8x40 GOST7802		6
27	Screw 4x16 GOST1145		6
28	Screw 6x70 GOST1145		44
29	Stud M8x45 DIN7991		3

Picture 32




«Fire engine»

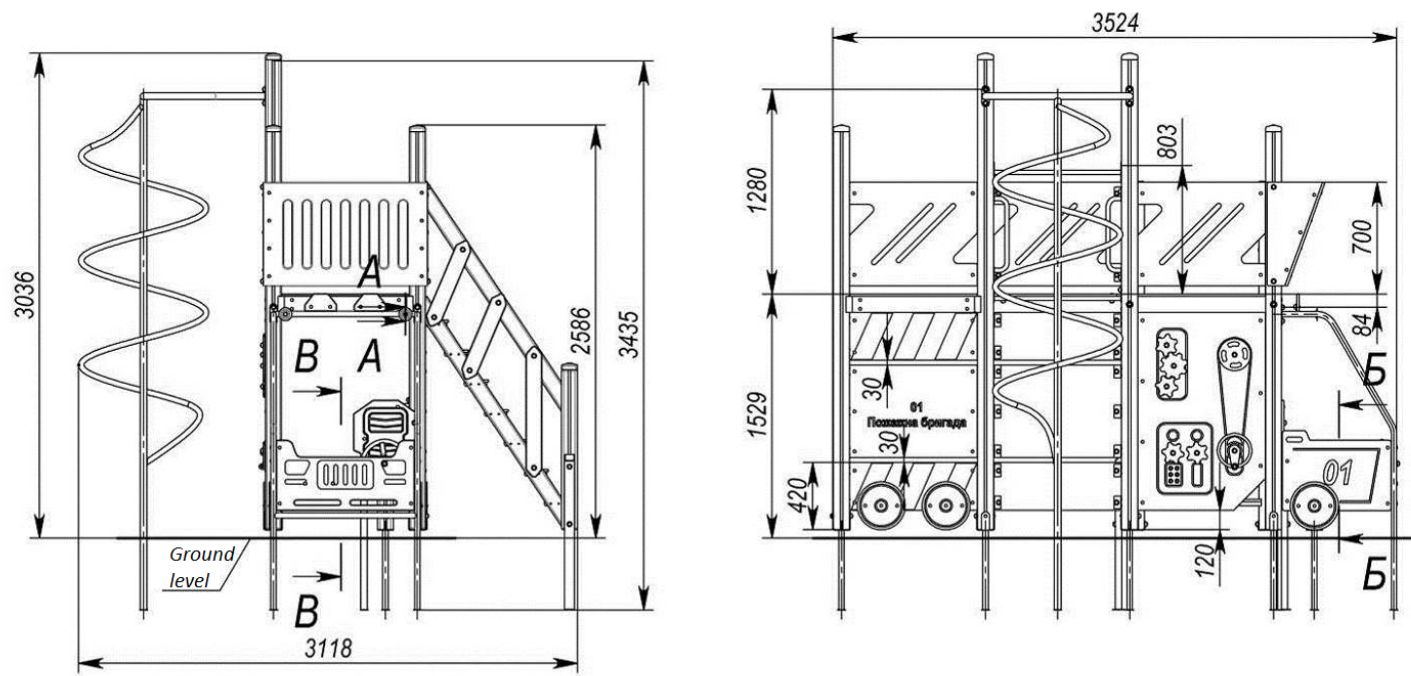


Б-Б (1 : 10)

В-В (1 : 10)

А-А (1 : 4)

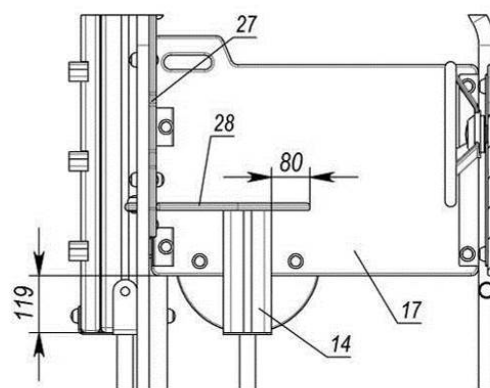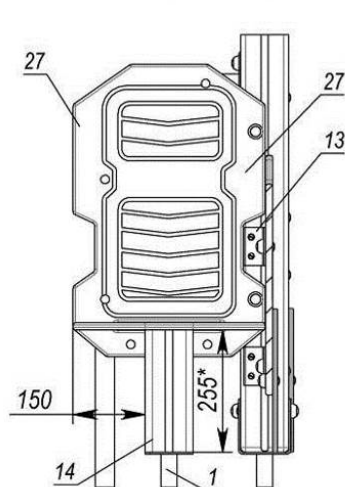

Picture 33

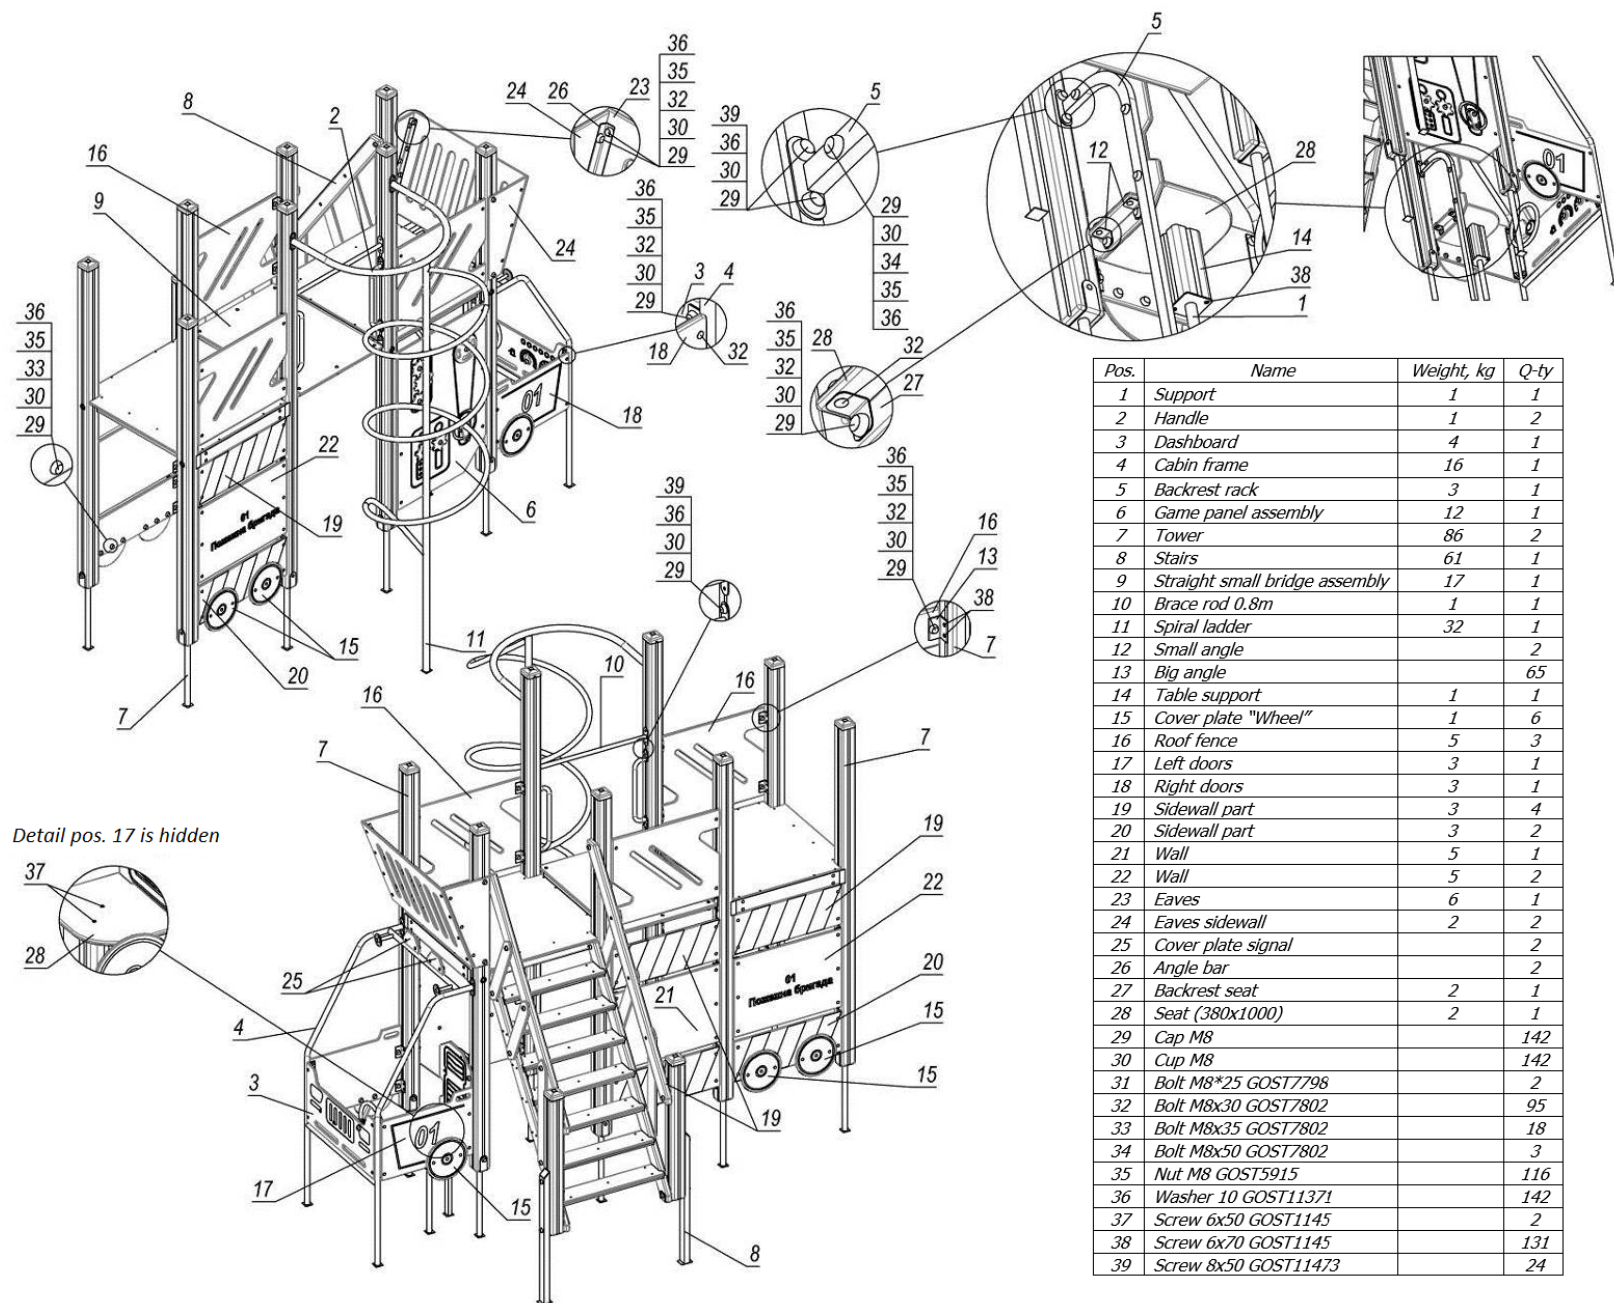

Picture 34